

TS 600

.V8

1912

THE TINSMITH'S HELPER



Class TS600

Book V8

Copyright N^o 1917

COPYRIGHT DEPOSIT.

THE
TINSMITH'S HELPER
AND
PATTERN BOOK

*WITH USEFUL RULES, DIAGRAMS AND
TABLES*

BY H. K. VOSBURGH

REVISED BY
WILLIAM NEUBECKER

SEVENTH EDITION

NEW YORK
DAVID WILLIAMS COMPANY
239 West 39th Street

1912

COPYRIGHT, 1906
BY DAVID WILLIAMS CO.

COPYRIGHT, 1912
BY DAVID WILLIAMS CO.

INTRODUCTORY.

The aim in preparing this little manual has been to make it a guide for the apprentice, journeyman and master sheet metal worker. To this end the author collected everything of value on the subject and then boiled it down to a well arranged series of simple problems on the different phases of pattern drafting which the mechanic has to puzzle over daily.

The section on Mensuration will be found both accurate and complete and the rules and examples are reduced to the plainest language so that any one may understand them. Realizing the value of reliable data, he included all the tables of weights of materials, measures of area, capacity, etc., to which the sheet metal worker has occasion to refer, together with many excellent recipes, formulas and rules, which will be found of great service.

The present edition has been carefully edited and revised by William Neubecker, expert pattern cutter and instructor at the New York Trade School. While the greater portion of the work remains intact, quite a number of important changes have been made, to insure greater accuracy, and many simpler methods have been included.

THE PUBLISHERS.

December 6, 1911.

I N D E X .

	PAGE
Aluminum and copper sheets, relative weight.....	96-97
Aluminum solder	120
Apothecaries' weight table.....	109
Arc, to find the center of.....	7
Areas and circumferences of circles.....	98-104
Arithmetical signs, definitions.....	74
Avoirdupois weight, table.....	109
Balls, to describe gores for pattern.....	32
Black sheet iron, standard gauges.....	89
Boiler block, description of.....	66
Boiler, oval, to find length of sheet required.....	26
Breasts for cans, to describe.....	10
Can breasts, pattern for.....	11-12
Cans one inch deep, capacity of.....	106
Capacities of bodies, mensuration of.....	85
Cement for apparatus, corks, &c.....	119
Cement for bottle corks.....	115
Cement for china.....	116
Cement for coppersmiths and engineers.....	115
Cement for cracks in wood.....	118
Cement for fastening blades, files, &c.....	119
Cement for fastening brass to glass vessels.....	119
Cement for holes in castings.....	115
Cement, iron rust	114

	PAGE
Cement for iron tubes, boilers, &c.....	114
Cement for ivory, mother of pearl, &c.....	114
Cement for joining metals and wood.....	118
Cement for leather	116
Cement for marble workers and coppersmiths.....	116
Cement for mending earthen and glass ware.....	114
Cement for repairing fractured bodies of all kinds...	118
Cement for stone ware.....	114
Cement, gas fitters'	118
Cement, hydraulic cement paint.....	119
Cement, marble	116
Cement, plumbers'	115
Cement to mend iron pots and pans.....	117
Cement to render cisterns and caşks water tight....	117
Cement to stop a leaky roof.....	119
Cement, transparent for glass.....	117
Center of an arc, to find the.....	7
Circle, to describe octagon within.....	9
Circles, mensuration of	79-83
Circles, tables of circumferences and areas.....	98-104
Circumferences and areas of circles.....	98-104
Cisterns and tanks, number of barrels in....	107, 108, 109
Coffee pots, tables of sizes.....	111
Cone, old German rule for patterns.....	18
Cone, pattern for	13
Cones and pyramids, to find the convex surface of..	84
Cones and pyramids, to find the solidity of.....	86
Cones, mensuration of	73
Copper sheets, weight	96-97
Cover, oval boiler, pattern for.....	27

	PAGE
Cubes, mensuration of	72
Cylinders, mensuration of	70-71
Cylinders, to find the convex surface of.....	83-84
Cylinders, to find the solidity of.....	86
Cylindrical measures	105
Cylindrical vessels, to find the contents in gallons of.	86
Decimal equivalents to fractional parts of lineal measurement	75
Definitions of arithmetical signs.....	74
Dippers, tables of sizes.....	III
Dish kettles and pails, tables of sizes.....	III
Druggists' and liquor dealers' measures, tables of sizes	III
Dry measure, table	110
Elbow in five sections, pattern for.....	58
Elbow, obtuse, to describe pattern for.....	60
Elbow, tapering, to describe.....	61
Elbow, to describe, quick method.....	53
Elbow, three piece, to describe.....	54
Ellipse or oval, to find the area of an.....	83
Ellipse or oval, to find the circumference of an.....	83
Ellipses, mensuration of.....	73
Flaring article, square top, rectangle base, to describe pattern	46
Flaring article, top and base rectangles, pattern for..	48
Flaring article, with straight sides and round ends, to describe patterns	42
Flaring hexagon article, to describe pattern.....	44
Flaring oval vessel, two pieces, to describe pattern..	40
Flaring square vessel, to describe pattern.....	45

	PAGE
Flaring tinware, to describe patterns for.....	16
Flaring vessel in three pieces.....	20
Flaring vessels, to describe pattern for.....	14
Flux for soldering tin roof.....	119
Four-piece elbow, to describe	56
Frustum of a cone, pattern.....	19-21
Frustum of a cone, to find the contents in U. S. standard gallons	87
Frustum of a cone, to find the solidity of.....	87
Frustum of a pyramid, to find the solidity of the...87-88	
Frustums of cones, mensuration of.....	73
Funnel, rectangular, pattern for.....	22
Galvanized sheets dimensions	91
Galvanized sheets, weight	91
Gores for balls, to describe pattern for.....	32
Heart with square and compass.....	30
Hexagon article, flaring, to describe pattern.....	44
Hood for stove pipes, to cut.....	15
Iron, black sheet, standard gauges.....	89
Iron plate, weight of.....	89
Lead pipe, weight per foot.....	92
Lead, sheet, weight of.....	90
Lineal measurement, decimal equivalents to frac- tional parts of	75
Liquid measure, table	110
Measure, lip, pattern.....	28
Measures of capacity, dry.....	110
Measures of capacity, liquid.....	110
Measures of weight, Avoirdupois.....	109
Measures, tables of sizes.....	111

	PAGE
Mensuration, epitome of.....	69
Mensuration of the circle, cylinder, sphere, &c.....	69-71
Mensuration of ellipses, cones, frustums, &c.....	73
Mensuration of solids and capacities of bodies.....	85
Mensuration of the square, rectangle, cube, &c.....	71-72
Mensuration of surfaces	76
Mensuration of triangles, polygons, &c.....	72
Metric system, and U. S. measures compared.....	110
Obtuse elbow, to describe pattern for.....	60
Octagon, tapering, to describe	47
Octagon, within circle, to describe.....	9
Octagon, within square, to describe.....	8
Oval boiler cover.....	27
Oval boiler, to find length of sheet.....	26
Oval flaring vessel, four pieces, to describe patterns.	43
Oval, to describe	34-36, 37
Oval, to describe by string, pins and pencil.....	38
Oval with diameters as 5 to 8, to describe.....	35
Pans, table of sizes.....	111
Pipes of various metals, weights.....	91
Pitched cover, pattern for.....	29
Plate iron, weight.....	89
Polygons, mensuration of	72
Polygons, to find the area of regular.....	78
Rectangle, mensuration of a.....	71-72
Rectangular base and round top article, pattern for..	50
Rectangular funnel, pattern	22
Right angle elbow, to describe.....	52
Round base and square top article, pattern for.....	49
Round top and rectangular base article, pattern for..	50


	PAGE
Round top and square base article, pattern for.....	51
Rules for calculating circumferences.....	107
Scale tray or scoop, pattern for.....	24
Scoop or scale tray, pattern for.....	24
Sheet lead, weight	90
Sheet zinc, weight per sheet.....	95
Solder, aluminum	120
Solder, black	113
Solder for copper	113
Solder for steel joints.....	113
Solder, hard	113
Solder, pewterers'	113
Solder, plumbers'	113
Solder, silver	112
Solder, silver, for plated metal.....	113
Solder, soft gold	113
Solder, tinnors'	113
Solder, white for raised Britannia ware.....	112
Solder, white for silver.....	112
Solder, yellow for brass or copper.....	112-113
Soldering fluid or flux.....	120
Solids, mensuration of.....	85
Sphere, mensuration of the.....	70-71
Sphere, to find the solidity of a.....	88
Spheres, to find the convex surface of.....	85
Square base and round top article, pattern for.....	51
Square, mensuration of a.....	71
Square, to describe octagon within.....	8
Square top and round base article, pattern for.....	49
Square vessel, flaring, to describe pattern.....	45

	PAGE
Star, pattern for	31
Steamer or pitched cover, pattern.....	29
Strainer pail or watering pot breast, pattern.....	23
Stringing patterns, mode of.....	64
String pattern	65
Surface, mensuration of	76
Table, capacity of any cylindrical measure.....	105
Table, effects upon bodies by heat.....	112
Tables, circumferences and areas of circles.....	98-104
Tables, rules and recipes (See special subject).....	89
Tapering elbow, to describe.....	61
Tapering octagon, to describe.....	47
Tea kettle body, to obtain length of piece.....	63
Three-piece elbow, to describe a.....	54
Tin plates, net weight per box.....	93-94
Triangles, mensuration of.....	72
Triangles, to find the areas.....	77
Wash bowls, table of sizes.....	111
Water pressure per square inch.....	109
Water, weight of	107
Watering pot breasts, pattern for.....	23
Weights of materials (See various materials).	
Weights of various substances.....	110
Zinc, sheet weight of.....	95


DIAGRAMS AND PATTERNS.

To Find the Center of an Arc.

Fig. 1.

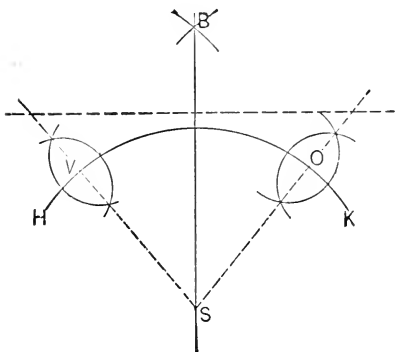


Let H K represent the given arc. Span dividers any convenient radius and describe small arcs, as V O. Draw lines through them, as shown by dotted lines, and the intersection, S, will be center sought.

To Describe an Octagon Within a Given Square.*Fig. 2.*

Draw diagonal lines from corner to corner and the intersection is the center *H*. With the compasses set to a radius from center to corner, and one foot set successively at each corner, describe the arcs, as shown. The points at which they cut the square, as *K V*, will be the corners of the octagon. Draw lines from point to point to complete the figure.

To Describe an Octagon Within a Given Circle.

Fig. 3.




Draw lines at right angles passing through the center H. This divides the circle into four equal parts, which need only to be subdivided into equal parts again to form the corners for the octagon. This may be easily done by drawing the lines K V, bisecting, as shown, and drawing lines to the circle.

The bottom will correspond in size to the size of the circle or square. Remember to allow for burr and double seam.

To Describe Breasts for Cans.


Fig. 4.



Draw horizontal line H K, another parallel to it, V O, making the distance between the desired height of breast. On H K lay off diameter of can, as S B. On V O, size of opening as U R, produce lines B R, S U, until they cross G. Span dividers from G to S, describe outer circle. G to U, describe inner circle. Set off outer circle equal to the diameter of the can B S. Starting at B, draw line from G, allowing for locks, as shown by dotted lines. *Reference can be made to the circumference table.*

Can Breasts.


Fig. 5.

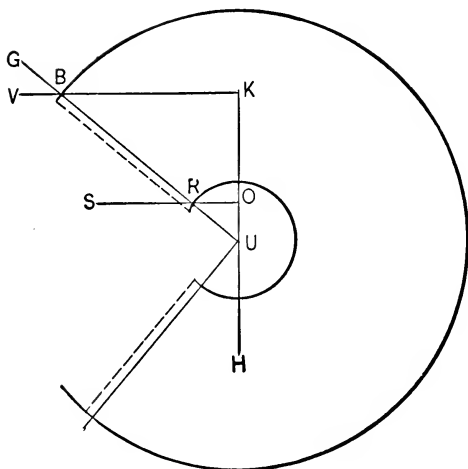

Draw the two horizontal lines, KV and OS , and perpendicular to them the line KH . Set off on line KV from the point K one-half the diameter of the can. On OS the point R is one-half the diameter of the opening. Produce the line UG , touching the points B and R , until it intersects HK . From U as center, with the radius UB , describe the outer circle. With the radius UR , the inner. Then span from K to B and step six times on large circle to obtain size of breast. Draw line to center and allow for locks, as shown by dotted lines.

Can Breasts.

Fig. 6.




Describe circle size of can. Draw line through center H. Span dividers three-fourths of diameter and strike circle K V. Span to diameter of can and step three times on large circle.

Draw line from center to points K V, allowing for edges and locks. For more or less pitch make circle K V larger or smaller.

Small circle in center for opening in top. Hoods and pitched covers may be cut by same rule.

Pattern for Cone.


Fig. 7.

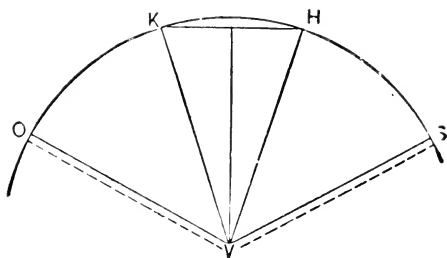

H K V represents a cone for which an envelope is wanted.

Span the dividers from V to H and describe the arc O S. Set off the arc equal in length to the circumference of the required cone. Draw the lines V O and V S, allowing for locks or laps, as shown by the dotted lines.

For the circumference, refer to the tables or obtain by some of the rules. By using the rules familiarity with them is obtained, which is desirable.

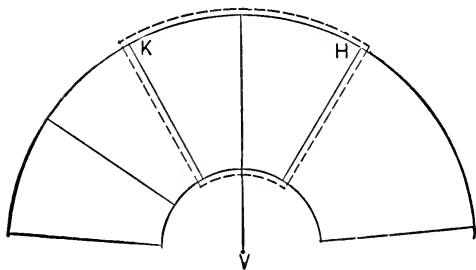To Describe Pattern for Flaring Vessels.*Fig. 8.*

For example, it is desired to describe pattern for pail 12 inches in diameter at top, 9 inches at bottom and 9 deep.

Take the difference between large and small diameters (3 inches) for the first term, the height for the second and the large diameter for the third, thus, 3 : 9 : : 12.


$12 \times 9 \div 3$, this gives radius by which the pattern may be described. Span the dividers (or use beam compasses, piece of wire, straight edge or any convenient device) 36 inches and strike large circle. With radius less the slant height of pail strike small circle. Ascertain the cir-

cumference required and divide by the number of pieces to be used. Lay off on outer circle and draw lines to center, as H K V.

Allow for locks, burr and wire.

To Cut Hood for Stove Pipes.

Span dividers size of pipe, describe circle, cut in to center, lap over and rivet.

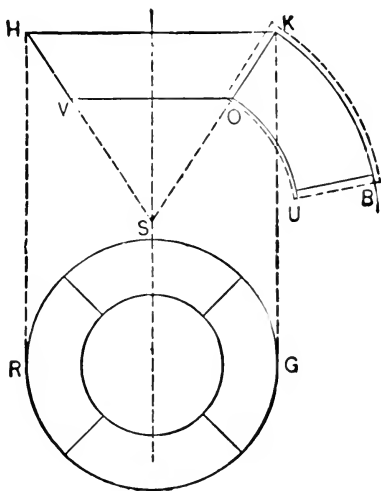To Describe Patterns for Flaring Tinware.*Fig. 9.*


By this figure and rule can be drawn any article of flaring tinware of any diameter, large or small. It is a rule of more extensive application than any other for getting correct patterns for frustums of a cone. It is the foundation for all curved work, cornice, bevels, chamfers, etc.

H K V O represents the elevation of an ordinary tin pan, constructed in four pieces, $15\frac{1}{2}$ inches in diameter at the top. Below the elevation is shown the same in plan; the pan is a frustum of a cone, and if the sides of the pan

were continued down until they intersected at S, as shown, the cone would be complete. The radius of the envelope of the cone must be either S H or S K. To describe the section of the frustum which is required, place one foot of the dividers at the center S, and with the radius S H describe the arc K B. With the radius S V describe O U. This gives the width of pattern and the proper sweep.

To get the length of the piece, refer to the table of circumferences or find, by the rules given, the circumference of the article, which in this case is $48\frac{5}{8}$ inches. There being four pieces, divide by four, which gives 12 $5\text{-}32$ inches; span the dividers 1 inch, step off the 12 and add the fraction.

Draw line from center S to point last ascertained. For locks, wire edge and burr allowance must be made.

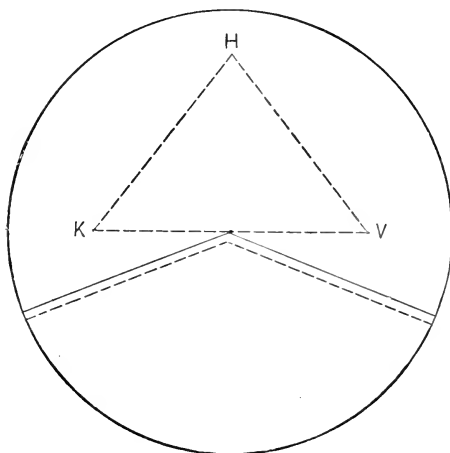
The Old German Rule for Patterns for the Cone.*Fig. 10.*

Take the slant height of the cone $H K$ as a radius, and describe a circle. Divide the diameter of the base of the cone $K V$ into seven equal parts and set off a space equal to twenty-two of these parts on the circle already struck. From the extremities thus measured off draw lines to the center.


Allow for locks.

Frustum of a Cone.

Fig. 11.

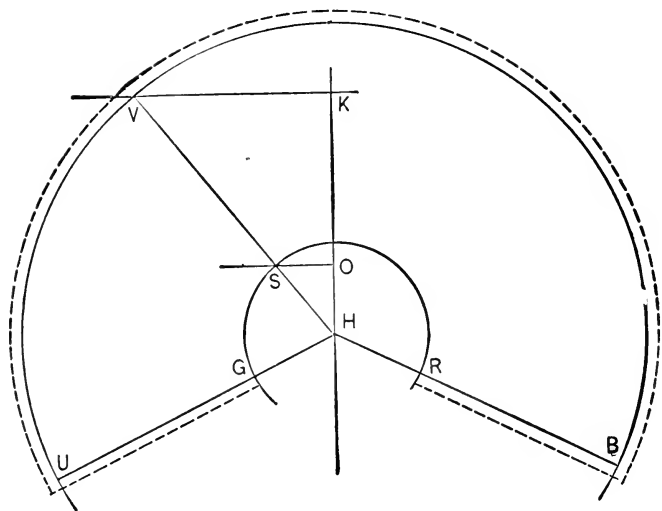


Lay the square on your sheet and construct the right angle $H K V$. Draw line $O S$ parallel to $K V$, making the distance $K O$ the altitude. On these lines lay off one-half the diameter of the large and small ends. Draw line through points V and S until they intersect at H ; then, with H as the center, describe the semicircles $B U$, $R G$. Lay off circumference of large end on line $B U$ and draw lines to center H . Must allow for all edges. For two sections take one-half of the piece, allowing edges on piece used for pattern.

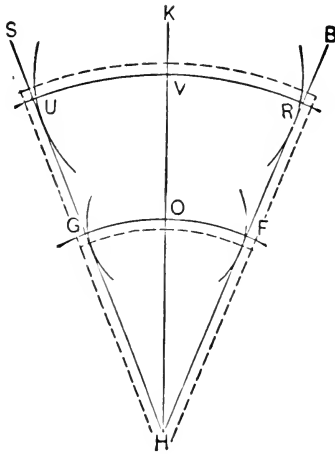Flaring Vessel in Three Pieces.*Fig. 12.*

Draw line $H K$; perpendicular to it, lines parallel to each other apart the height of vessel. With the intersections, as V, O for centers, describe circles size of top and bottom of vessel. Draw lines $S H$ and $B H$ touching on circles, and at intersection H as center, with the radius $H V$, describe the segment $U R$; with the radius $H O$, the segment $G F$. Allow for locks, as shown by dotted lines.

Frustum of a Cone


Fig. 13.

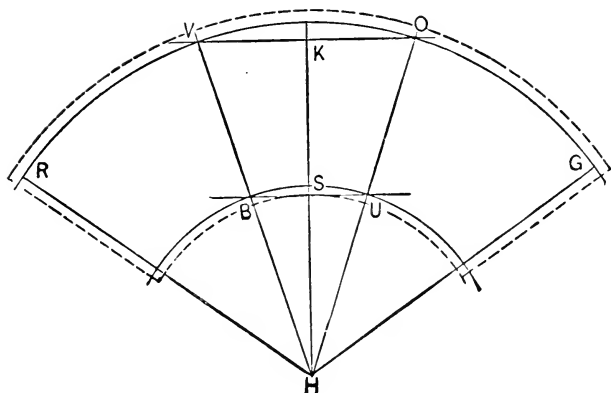

Draw perpendicular line $H K$, and from K lay off diameter of large end, as $V O$; on the line $H K$ the height of frustum, as $K S$. Draw line parallel to $V O$, and on it lay off small diameter, as $B U$. Draw lines through points $V B$ and $O U$ until they intersect at H . Span compasses from H to V and draw large arc $R G$; from H to B and describe small arc; make arc $R G$ equal to circumference of large diameter and draw lines to center H . Allow for all edges, wire, burr and locks. This forms a pattern in one piece.

Rectangular Funnel.


Fig. 14.

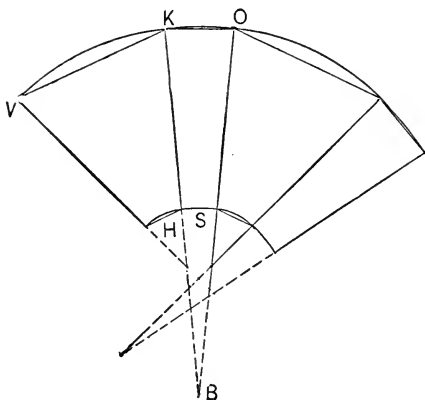

Draw side, as H K V. Continue side lines, as shown by dots. From point of intersection as center, describe arc and chord K V and H. Draw end O K S, producing lines to intersect at B. From B as center describe arc and chord O K and S. The other side and end obtained in the same manner, as shown in cut. Can be made in two or more pieces by dividing. All locks and edges must be allowed for on the pattern piece.

For Strainer Pail or Watering Pot Breast.


Fig. 15.



Strike circle size of pail or pot. Span dividers $1\frac{3}{4}$ inches, more or less, than radius of circle, being governed by pitch desired, as from V to K, and describe the arc. Draw the chord, making the segment K O which is the pattern of the desired width. The breast may be cut out if preferred, as shown by dotted lines.

Scale Tray or Scoop.

Fig. 16.

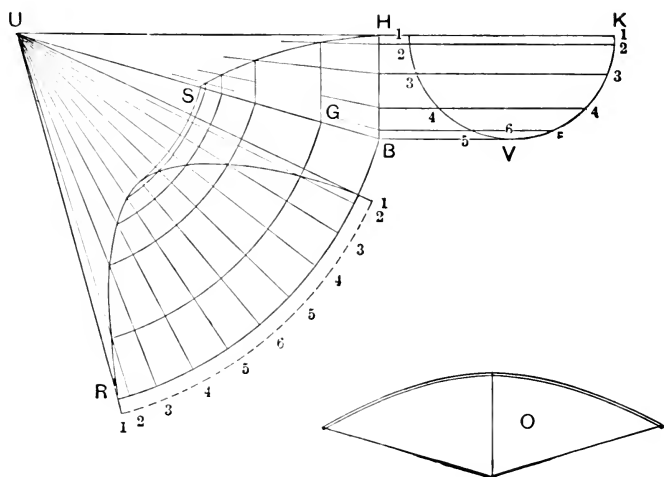

Construct a sectional view of the scoops, as H K V; it being made in two pieces as O, let H S B represent one-half elevation of it. Continue the lines B S and K H until they cross at U. Divide H K V into any given number of spaces, continuing the same to the line H B, as shown by short lines. Draw lines from the division


points on H B to the joint U, thus obtaining the intersections on the line S H. With the T square at right angles with H U, drop the points thus obtained on H S, onto the line B S.

With U as center and U B as a radius describe the arc B R. Step off upon this arc spaces equal to those in H K V, using dividers, which gives the length B R. Draw radial lines from U to space marks on line B R, as shown.

With U as center and the various points on S B as radii, describe arcs, intersecting similar radial lines as shown. Then a line traced through the points thus obtained, together with the arc B R, will be the outline of the required pattern. Allow for edges, as shown by dotted lines.

To Find Length of Sheet Required for Oval Boiler. Common Method.


Fig. 17.

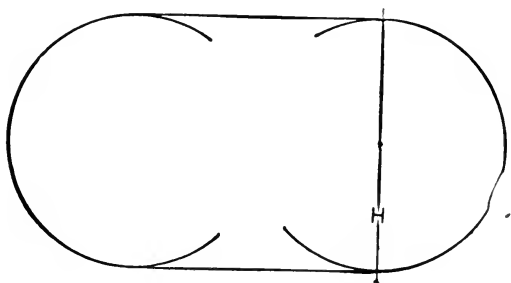


Describe bottom, length and width desired, then burr and from H as a starting point roll on the bench to obtain circumference. If three pieces are to be used, divide the circumference into three parts and allow edges; if made in two pieces, divide by two. Always divide the circumference by the number of pieces desired. Cut the cover the same size as bottom.

Oval Boiler Cover.

Fig. 18.




Draw line A K, and from R as center describe circle G U, size of boiler outside of rod. Make A K equal to one-half of entire length of boiler, and K S $\frac{3}{8}$ inch or more if more pitch is desired. Through S draw the perpendicular line H V. Lay corner of square on line H, one blade at K, the other touching circle, describe lines U H K; in similar manner obtain K V G. Allow for locks and notch for edges.

Measure Lip.*Fig. 19.*


Draw line HK and upon it, with V as center, describe circle size of measure. With S as center, being the half distance from V to H , describe semicircle BU . Make RK the desired width. With V as center describe GO . Cut on BU and GO to obtain the lip.

Steamer or Pitched Cover.

Fig. 20.




Strike circle 1 inch larger than rim burred. Draw line through center H, and from either side cut 1 inch on circle to 1 inch from center K. Draw lines and cut out. Or, strike circle the same or larger. Draw line through center and cut on it to center. After burring put in rim; draw up and mark, cut out triangular piece and solder. Much quicker and equally as good.

Heart with Square and Compass.*Fig. 21.*

Draw line H K the breadth of the heart and on it two semicircles. Span dividers from H to K and make sweep to V.


To Describe a Star.

Fig. 22.

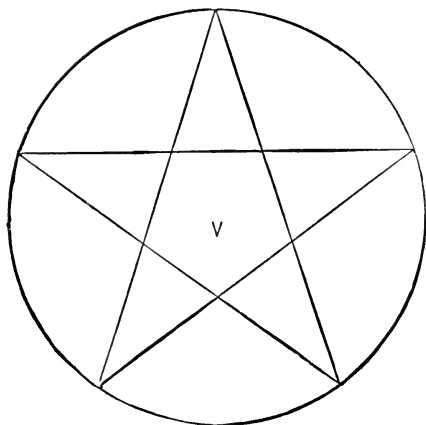


From V as center strike circle size of star desired. Divide circle in five parts and draw lines to points.

There is a rule for finding the points of a star other than stepping, but I do not give it. I have found the mode given to be the quickest and most accurate.

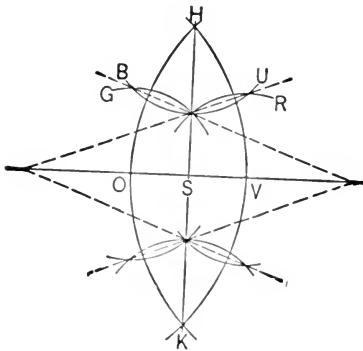Pattern for Cutting Balls.—To Describe the Gores.*Fig. 23.*

Erect perpendicular line $H K$ equal to one-half the circumference of the ball; divide this line into one-half the number of pieces required in full ball; make the line $V O$ equal to one of these pieces, cutting $H K$ through the center at right angles; then with H and K as centers, with radius greater than one-half the distance $K S$, describe the two arcs $B U$; with V and O as centers, arcs $R G$; draw

Lines through these points, as shown by dotted lines. From points of intersection describe arcs H V K and H O K, and you obtain pattern for one piece. Allow for laps or seams. The more pieces used the better globe produced. Good results obtained by slightly raising the pieces.

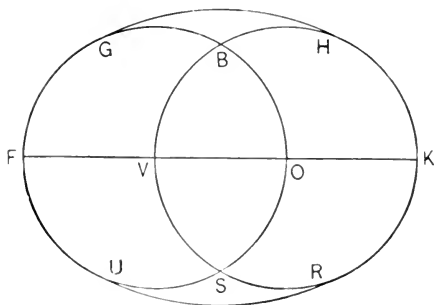
To Describe an Oval.*Fig. 24.*

Draw horizontal line FK , span the dividers one-third the required major diameter, and from V and O as centers describe circles, as shown; then span dividers two-thirds entire length, and, with one foot at the intersection of the circles, as S and B , draw the arcs GH and UR , which completes the oval.

The proportion of the diameters is about as 3 to 4.

To Describe Oval with Diameters as 5 to 8.


Fig. 25.

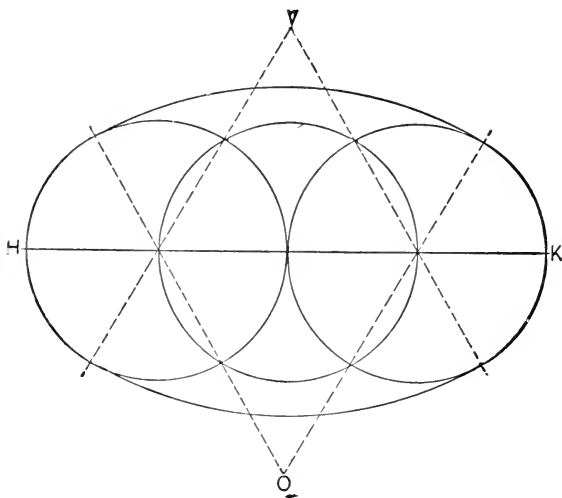

Draw horizontal line $H K$. Span compasses one-quarter the long diameter and describe three circles with that radius, as shown by diagram. Then draw lines through centers of outer circles and their intersections, as shown. The oval is completed by drawing the arcs connecting the outer circles from points V and O as centers.

To Describe an Oval. Another Method.


Fig. 26.

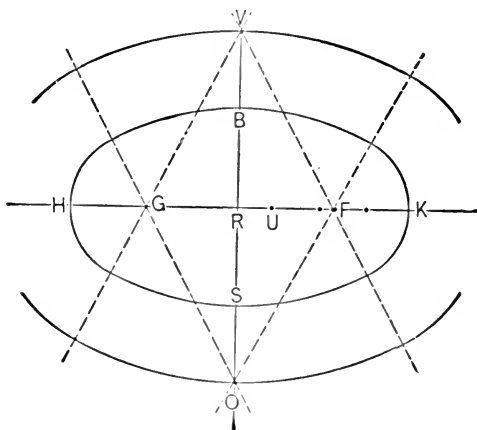

Draw horizontal line HK and perpendicular to it VO . Let HK equal the long or transverse diameter, and SB the short or conjugate. Lay off the distance SB on the line HK , as from H to U . Divide the distance UK into three equal parts. From R , the center, set off two of the parts each side, as GF . On the line VO set off the distance GF from R , as RV and RO . From V and O draw lines passing through G and F , as shown. From the points V , O , G , F as centers describe the arcs that complete the ellipse.

To Describe an Oval. Another Method.


Fig. 27.

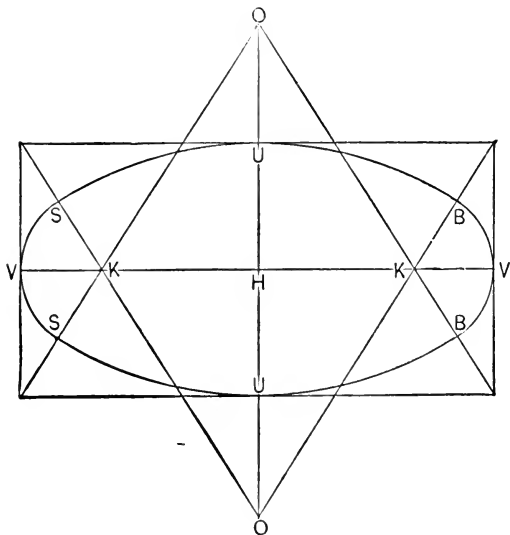

Construct the parallelogram equal in length and width to the long and short diameters of the oval desired. Divide it into four equal parts by drawing lines through the center, crossing at H . Mark the points K and K one-third the distance from V to H , and draw lines from the corners through these points until they intersect, as shown at O . Then from O and O as centers describe the arcs $S U B$ and $S U B$; from K and K as centers the segments $B V B$ and $S V S$.

To Describe Oval by Means of String, Pins and Pencil.

Fig. 28.

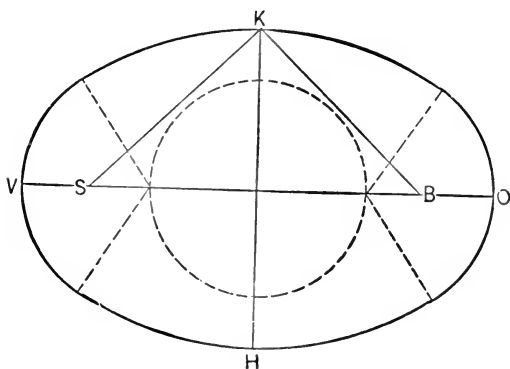


Erect perpendicular line H K equal to short diameter and at right angles to it V O. Span dividers one-half the length of the oval, and with H and K as centers describe the arcs S and B. Set pins at these points, and, with a string (one that will not stretch) tied around them so that the loop when drawn tight will reach H or K, as shown, draw the figure with pencil, keeping string equally tense while going around. Of all the apparatus invented

for oval drawing I think the string is the best. The best results, at least, are obtained. To attempt to draw a perfect oval or ellipse by the use of compasses is vain. It cannot be done so that the line will be true, or the proportion or shape satisfactory to one with an eye for correctness or uniformity. The so-called trammels are the next best thing, but no better. A few rules for drawing ovals by the use of dividers have been given in this work so the mechanic may take his choice, and after a little practice with the string and nails will find them the best trammels yet invented for the purpose.

To Describe Pattern for Flaring Oval Vessel. Two Pieces.

Fig. 29.

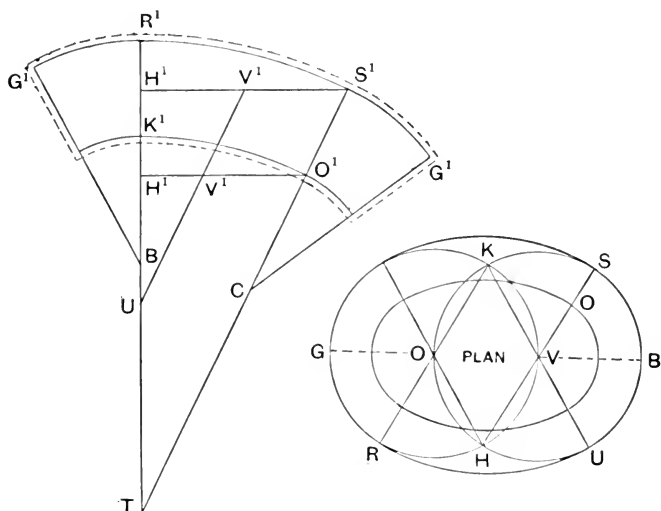


Draw plan according to rule given in Fig. 24, or any other method. Construct right angle triangle $T H^1 S^1$ and parallel to $H^1 S^1$, draw $H^1 O^1$, the distance between height of article. Lay off on $H^1 S^1$ the distances $H S$ and $V S$ in plan and on $H^1 O^1$ the distances $H O$ and $V O$ in

plan. Draw lines through these points to intersect the line $R^1 T$ at U and T . Using T as center draw the arcs $O^1 K^1$ and $S^1 R^1$, making the distance along the arc $S^1 R^1$ equal to $U R$ in plan. Draw line from R^1 to T . Take radius $V^1 U$ on the lines $R^1 T$ and $S^1 T$ and obtain centers B and C , with which describe the arcs $R^1 G^1$ and $S^1 G^1$, which make equal in length to $G R$ or $U B$ in plan. Draw lines to centers B and C . Allow for all edges, locks, wire and burr.

To Describe Pattern for Flaring Article with Straight Sides and Round Ends. Two Pieces.


Fig. 30.

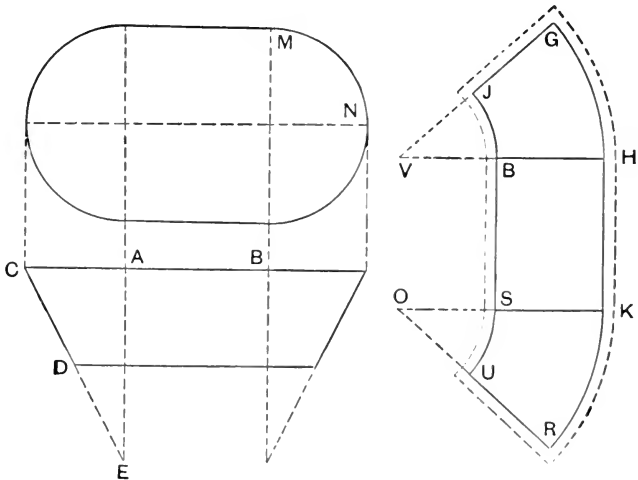

Erect two perpendicular lines, $H V$, $K O$, distance between the length of sides $A B$; at right angles to these, two lines, distance between the slant height of article $C D$. On $H V$ and $K O$ set off the radius $C E$ as V and O . From V and O as centers, with radii $V B$, $V H$ and $O S$, $O K$, draw the arcs $B J$, $H G$ and $S U$, $K R$. Make the arcs $H G$ and $K R$ equal to one-half the circumference of the ends $M N$ and draw lines to V and O . Allow for all edges, locks, wire and burr.

To Describe Pattern for Oval Flaring Vessel. Four Pieces.


Fig. 31.

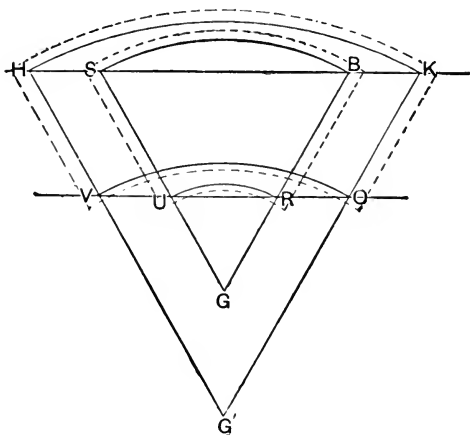

Describe bottom as by Fig. 27. Obtain length of arcs S U B and S V S, also length of corresponding arcs at the top of vessel. Draw horizontal lines H K and V O, making the distance between the desired slant height. Make H K equal in length to that of the piece at the top, and V O to that of the bottom, for the sides. S B and U R for the end pieces. Produce lines through these points to intersect at G and G'. Describe the arcs from these points. Allow for all edges, locks, wire and burr.

To Describe Pattern for Flaring Hexagon Article.


Fig. 32.

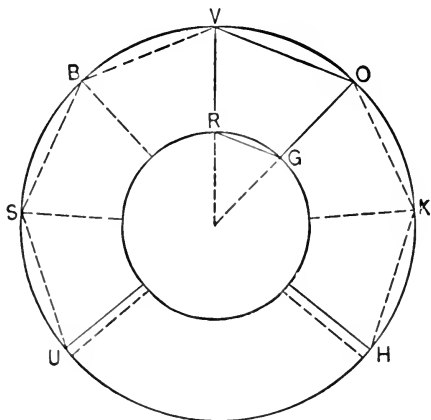

Let $V O$ represent width of the bottom of one side and $R G$ the width of the top of one side, the distance between the slant height. Produce side lines until they cross in the center, as shown by dotted lines. Span dividers from center to O , and describe circle $H O U$; span to G and describe inner circle; span again from V to O and step on the outer circle three spaces each side from O , as K, H, B, S, U . Draw lines from these points tending toward center, and connect by chords as $H K, K O$, etc. Cut out piece $H U$, allowing for locks, as shown. Pattern for a pentagon article may be described by the same rule.

To Describe Pattern for Flaring Square Vessel.


Fig. 33.

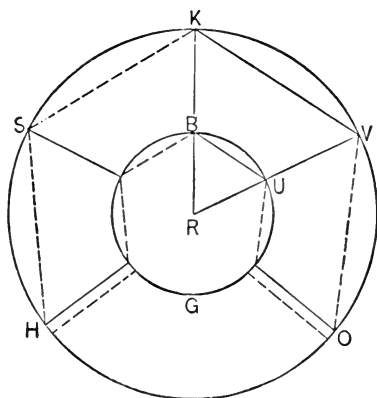

Let $K V$ and $B U$ represent the width of the bottom and top of one of the sides, the distance between the slant height. Continue lines until they intersect at R . With radius $R B$, strike circle $U B G$. Span dividers from K to V and set off on outer circle the distance, as $V O$, $K S$, etc.; draw lines through these points tending toward the center R , also the chords, as shown by dotted lines. Allow for edges. Can be made in two pieces by dividing and allowing for extra lock or seam.

To Describe Pattern for Flaring Article with Square Top and Base a Rectangle. Two or Four Pieces.


Fig. 34.

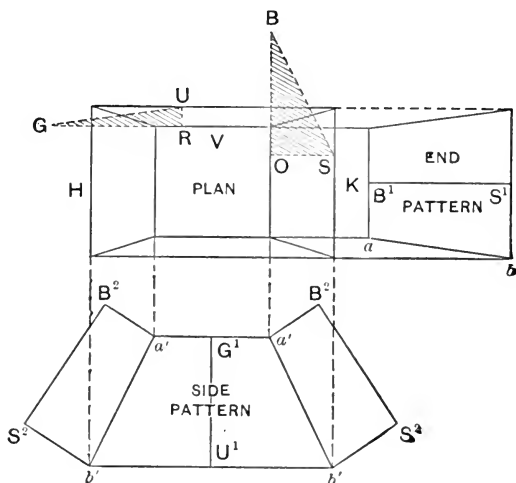

Draw rectangular base $H K$ and square top V in center of base. Draw perpendiculars $O S$ and $R U$. Also place the height of the article $O B$ and $R G$. Place the slant height $B S$ on $B^1 S^1$ and draw lines a and b which intersect as shown, which gives pattern for end. Place $G U$ on $G^1 U^1$, draw lines a' and b' which intersect as shown, which gives pattern for side. Join half of end pattern to either side of side pattern as shown by similar letters, which gives half pattern.


To Describe Tapering Octagon Article.

Fig. 35.

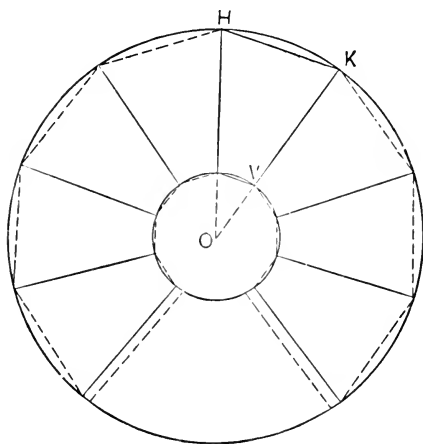

Draw bottom K H and top V of one side, with distance between the slant height, and continue side lines until they intersect at O. With O as a center and the radii O V and O H, describe inner and outer circles. Set off on them distances equal to H K and V, and connect by chords, as shown by dotted lines. Allow for locks and edges.


Flaring Article, Top and Base a Rectangle. Two Pieces.

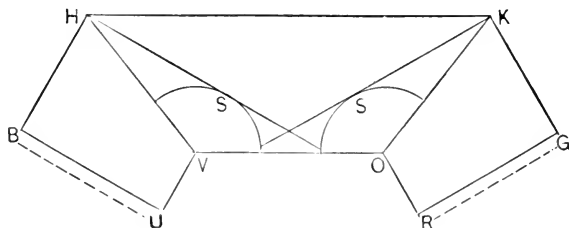Fig. 36.

Draw side elevation, as $H K$, $V O$, of the longest side. Span dividers the difference between the shortest side of the base and longest side of top. From V and O as centers describe arcs S and S . With blade of square resting on arcs and the corner at H and K , draw lines $H B$ and $K G$. Set off $H B$ and $K G$ equal one-half of shortest sides of base and draw lines $B U$ and $G R$ at right angles to $H B$ and $K G$; also lines $U V$ and $R O$ at right angles to $U B$ and $G R$. Allow for locks, as shown by dotted lines. For a strictly accurate pattern proceed as in Fig. 34.


Round Base and Square Top Article. Two Pieces.

Fig. 37.

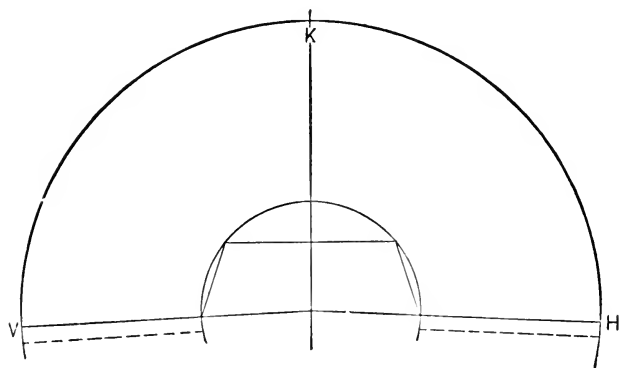

Erect perpendicular line. Span dividers to three-quarters diameter of base and describe semicircle H K V. Make K V and K H each equal to one-quarter the circumference of the round base and draw lines to center. Span dividers to three-quarters size of top from corner to corner and describe inner circle. Lay out sides of top, size required, on circle, as shown. Allow laps.


Rectangular Base and Round Top Article. Two Pieces.

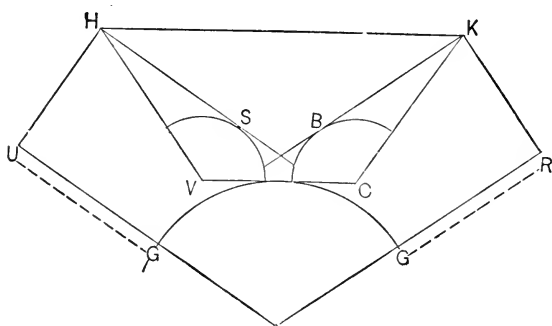Fig. 38.

Draw horizontal lines H K, V O. Make H K equal to the longest side of base, V O equal to one-fourth the circumference of the top, the distance between slant height; draw side lines through these points. With radii one-half the difference between V O and the shortest side of the base, describe the arcs S, B; with blade of square resting on arcs, and corner at H and K, draw lines K R, H U, equal to one-half the short side; at right angles to K R, H U, draw lines R G and U G; U G and R G produced will intersect; from this point span dividers to line V O and describe the arc. Allow for locks and edges.

Square Base and Round Top Article. Two Pieces.


Fig. 39.

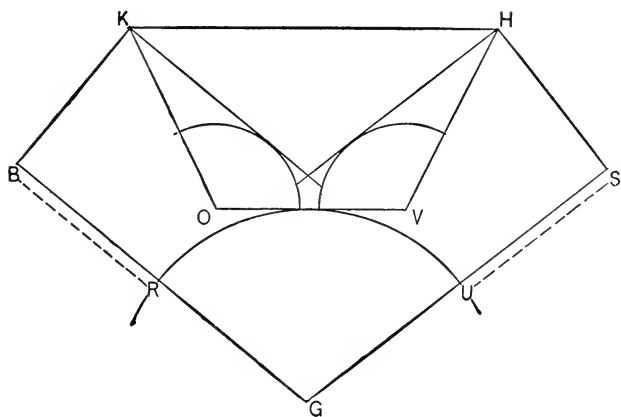

Draw horizontal lines $H K$, $V O$; $H K$ equal to the length of one side of the base, $V O$ equal to one-fourth the circumference of the top, the distance between the slant height; draw lines through these points. With radii one-half the difference between $K H$ and $O V$, describe arcs; with blade of square resting on arcs and the corner at H and K , draw lines $H S$ and $K B$, equal to one-half the base; at right angles to $H S$ and $K B$ draw $S U$ and $B R$, produced to intersect at G . Span dividers from G to line $V O$ and describe the arc. Allow for locks and edges.

To Describe a Square or Right Angle Elbow. Two Pieces.

Fig. 40.

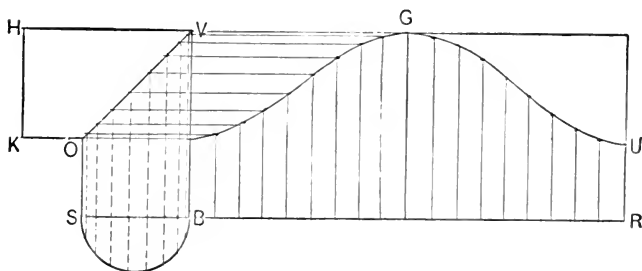


Draw the elevation of the elbow, as B S, O V, K H. Draw line from V to O. Divide one-half of the plan into a convenient number of equal parts, as shown by dotted lines; erect lines to intersect O V. Make the line B R equal in length to the circumference of the elbow. Set off on this line spaces corresponding to those in the plan, the same number each side of the center line; then draw lines parallel to the arm of the elbow, cutting the corresponding lines as indicated. By tracing through these points the irregular line U G the pattern is obtained. Allow for locks or rivets.

The general principle for cutting elbow patterns is the same throughout, and to understand the principle is to be able to describe pattern for any elbow, at any angle and of any number of pieces. It is the design of this work to make the principle clear.

Quick Method.


Fig. 41.

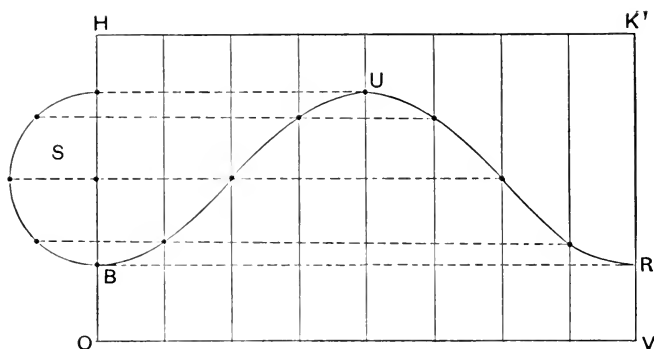

Lay out on sheet length required for elbow, as H K V O. Describe semicircle S the desired size of pipe, which divide into four parts. Space the length of the sheet into twice the number of squares in S, and draw vertical and horizontal lines until they intersect. O B U R V is then an accurate pattern. Allow for flanges.


To Describe Three-Piece Elbow.

Fig. 42.

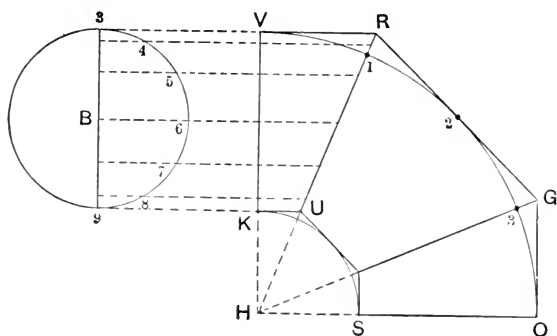

Let H K be the throat and K V the diameter of the elbow. Draw the quadrant V O, which divide into four equal parts, as shown by 1, 2, 3. Draw miter lines through 1 and 3 as H R and H G. Draw the circle B equal to diameter of elbow and divide one-half of B in equal parts, as shown; draw lines to intersect miter line R U.


Fig. 43.

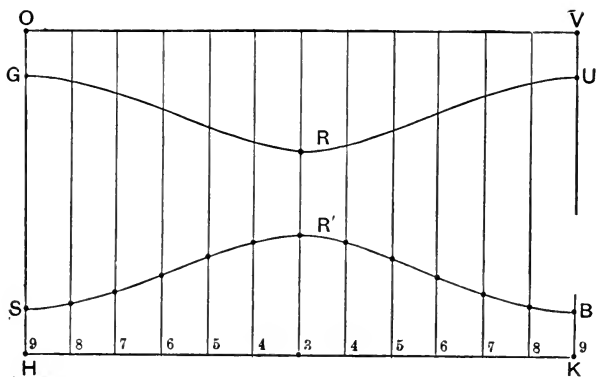

Construct parallelogram H K V O equal in length to the circumference of B. Through the spaces on H K draw parallel lines as shown. Measuring from V K, take the various distances to the miter line R U and place them on similar lines measuring from H K. H S B K is then the pattern for the end. Double the distance from 3 to R' and place it from S to G and B to U and transfer the miter line S R' B to G R U. Place H S as shown by G O and U V and draw O V, which completes the three patterns.


To Describe a Right Angle Elbow. Four Pieces.

Fig. 44.

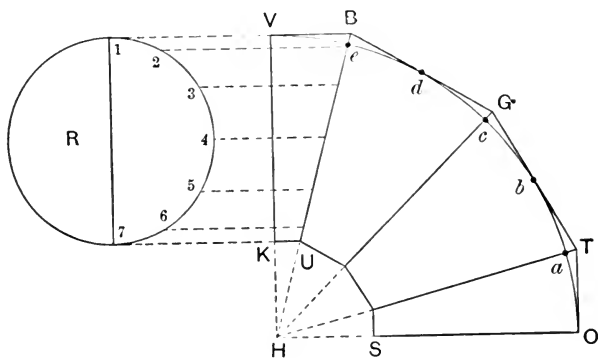

Let $H K$ be the throat and $K V$ the diameter of the elbow. Draw the quarter circle $V O$, which divide into six equal parts, as shown by $a b c d e$. Draw miter lines through a, c and e , as shown by $H B, H G$ and $H T$. Draw the circle R , which space as shown, and draw lines to intersect the miter line $B U$.


Fig. 45.

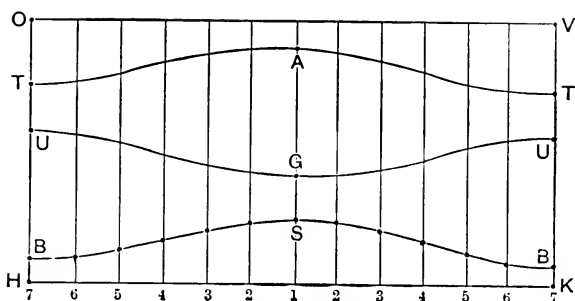

Construct parallelogram H K V O, equal in length to the circle R, as shown by similar figures on H K, through which draw parallel lines as shown. Measuring from V K, take the various distances to the miter line B U and place them on similar lines in the pattern, measuring from H K, and obtain B S B. Double 1 S and place at B U and B U and trace the miter cut B S B as shown by U G U. Place S G at U T and U T and trace U G U as shown by T A T. Make T O and T V equal to S 1 and draw line O V, which completes the four patterns. Allow for locks.


Elbow in Five Sections.

Fig. 46.

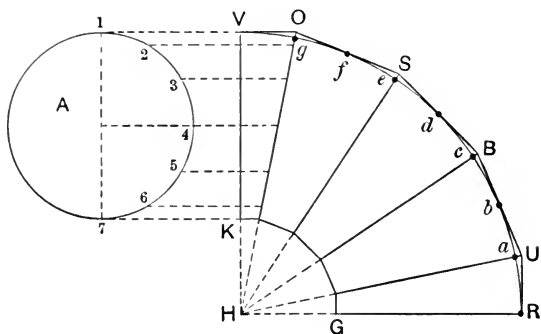

Draw throat H K and diameter K V. Draw quadrant H V R, which divide into eight parts as shown from a to g; draw miter lines H U, H B, H S and H O. Divide profile A into equal spaces, and draw lines to miter line H O.


Fig. 47.

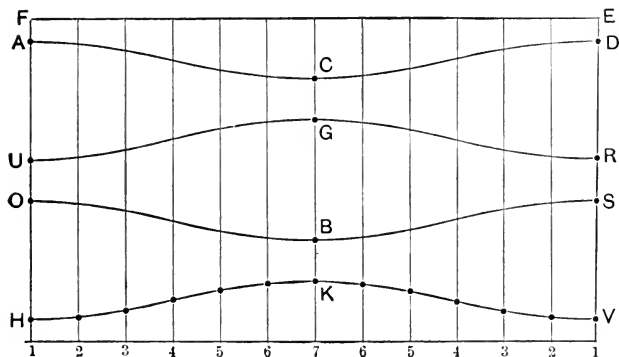

Make I I equal to circumference of profile A. Draw parallel lines as shown in pattern. Use dividers and measure various distances from V K to miter line H O, which transfer to similar lines measuring from I I, and obtain miter cut H K V. Double 7 K and place at H O and V S and draw miter cut O B S. Place K B at O U and S R and draw miter cut U G R. Make U A and R D equal to H O and draw miter cut A C D. Make A F and D E equal to H I and draw F E, which completes the five patterns. Allow for locks.

To Describe Pattern for Obtuse Elbow.


Fig. 48.

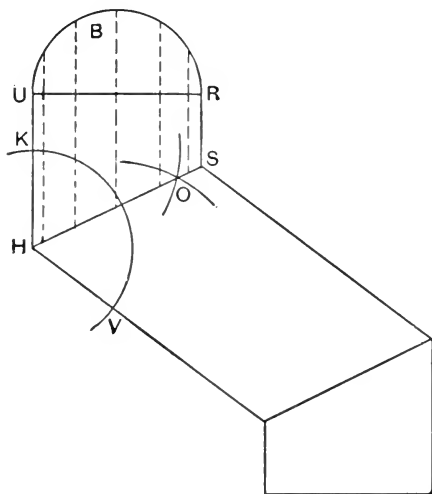


When the pattern for an obtuse elbow is desired it is only necessary to draw a correct representation of the elbow and obtain the miter line, as follows: With H as center, draw the arc K V. With any desired radius, and using K and V as centers, intersect arcs at O. Draw the miter line H O S. Place the half profile B in position as shown, which space, and draw parallel lines to the miter line H S. Then proceed as by the rules already given, and the result will be satisfactory.

To Describe a Tapering Elbow.


Fig. 49.

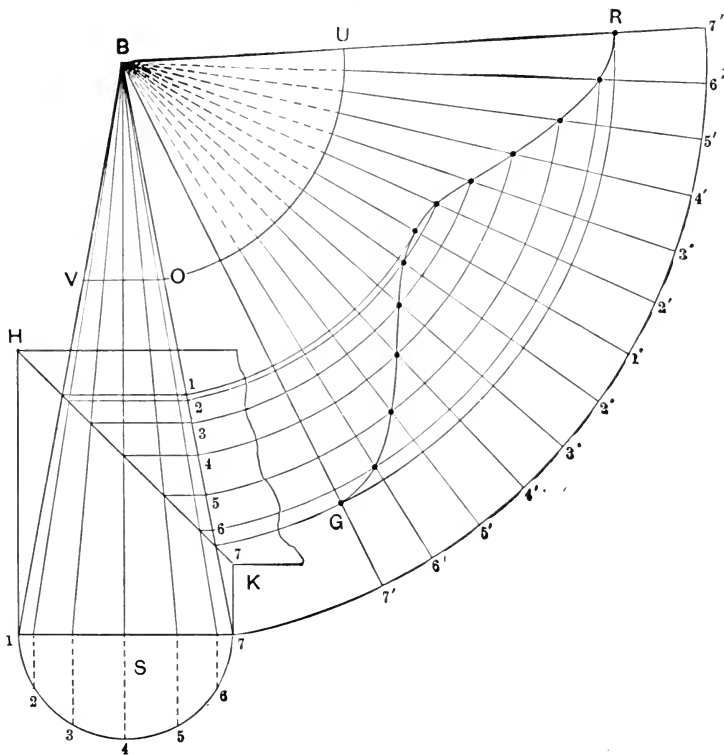

Draw elevation of elbow at any angle desired and draw miter line H K as shown. Establish height and diameter of small end as V O and extend the lines 1-V and 7-O until they meet at B. Draw half profile S, which space into equal parts and draw vertical lines to 1-7, from which draw radial lines to the apex B, which will cross the miter line H K as shown. From these intersections draw horizontal lines to the side B-7 as shown from 1 to 7. With B-7 as radius, draw the arc 7'-7' equal to the circumference of the circle S. From the points on 7'-7' draw radial lines to the apex B, which intersect by arcs struck from B as center, with radii equal to the points between 1 and 7. U R G O is the pattern for the upper arm and R G 7'-7' pattern for the lower arm. Allow for locks.

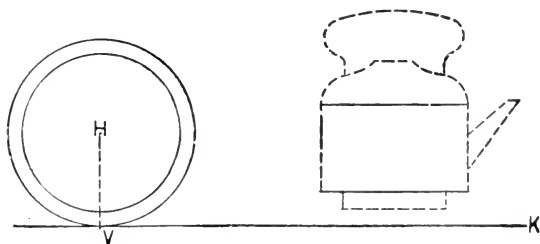To Obtain Length of Piece for Tea Kettle Body.*Fig. 50.*


The way in general practice is to roll the bottom after burring on the bench to obtain circumference, and use strip $\frac{3}{4}$ inch less in length, as shown by figure. H represents the pit; K V the length of the strip or sheet.

Mode of Stringing Patterns.*Fig. 51.*


This cut represents the three pieces of a 6-quart pan usually cut from one sheet of 10 x 14 tin. Instead of using one piece for pattern and placing it three times, three pieces are fastened together by soldering on two strips of tin with a heavy hem on each side, and all placed at once, thus saving time and vexation. To use to advantage begin at the bottom of the string pattern and mark around on the outside first, and then mark in the centers.

String Pattern.

Fig. 52.



This figure represents a string of rim or hoop patterns, fastened as shown in the same manner as described on page 64. Rims of any width can be put together in this manner and a great saving of time is the result when once properly done. Patterns for all articles of tinware should be strung in this way, when more than one piece is obtained from a sheet, that the marking out may be expedited and less tedious.

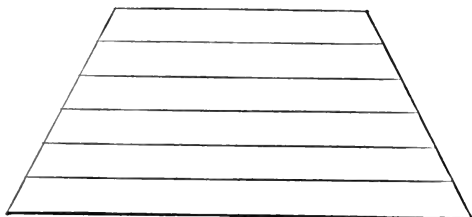Description of Boiler Block.*Fig. 53.*

By this figure is represented a block for truing up boilers after they are formed up in the rollers and locked together. Many mechanics depend upon the stake and the accuracy of the eye, but after using this method would not abandon it, as better results are obtained and in much less time. The block is made of 2-inch plank, by placing one on another and securing with four long bolts passing through them. The proper dimensions are as follows:

Bottom, 13 inches wide, 25 inches long.

Top, 10 " " 19 " "

Hight, 12 "

APPENDIX.

EPITOME OF MENSURATION.

OF THE CIRCLE, CYLINDER, SPHERE, ETC.

1. The circle contains a greater area than any other plane figure bounded by an equal perimeter or outline.

2. The areas of circles are to each other as the squares of their diameters.

3. The diameter of a circle being 1, its circumference equals 3.1416.

4. The diameter of a circle is equal to .31831 of its circumference.

5. The square of the diameter of a circle being 1, its area equals .7854.

6. The square root of the area of a circle multiplied by 1.12837 equals its diameter.

7. The diameter of a circle multiplied by .8862, or the circumference multiplied by .2821, equals the side of a square of equal area.

8. The number of degrees contained in the arc of a circle multiplied by the diameter of the circle and by .008727, the product equals the length of the arc in equal terms of unity.

9. The length of the arc of a sector of a circle multiplied by its radius equals twice the area of the sector.

10. The area of the segment of a circle equals the area of the sector, minus the area of a triangle whose vertex

is the center and whose base equals the chord of the segment.

11. The sum of the diameters of two concentric circles multiplied by their difference and by .7854 equals the area of the ring or space contained between them.

12. The circumference of a cylinder multiplied by its length or height equals its convex surface.

13. The area of the end of a cylinder multiplied by its length equals its solid contents.

14. The area of the internal diameter of a cylinder multiplied by its depth equals its cubical capacity.

15. The square of the diameter of a cylinder multiplied by its length and divided by any other required length, the square root of the quotient equals the diameter of the other cylinder of equal contents or capacity.

16. The square of the diameter of a sphere multiplied by 3.1416 equals its convex surface.

17. The cube of the diameter of a sphere multiplied by .5236 equals its solid contents.

18. The height of any spherical segment or zone, multiplied by the diameter of the sphere of which it is a part and by 3.1416, equals the area or convex surface of the segment; or,

19. The height of the segment multiplied by the circumference of the sphere of which it is a part equals the area.

20. The solidity of any spherical segment is equal to three times the square of the radius of its base, plus the square of its height, multiplied by its height and by .5236.

21. The solidity of a spherical zone equals the sum of the squares of the radii of its two ends and one-third

the square of its height, multiplied by the height and by 1.5708.

22. The capacity of a cylinder, 1 foot in diameter and 1 foot in length, equals 5.875 United States gallons.

23. The capacity of a cylinder, 1 inch in diameter and 1 foot in length, equals .0408 United States gallon.

24. The capacity of a cylinder, 1 inch in diameter and 1 inch in length, equals .0034 United States gallon.

25. The capacity of a sphere 1 foot in diameter equals 3.9168 United States gallons.

26. The capacity of a sphere 1 inch in diameter equals .002266 United States gallon; hence,

27. The capacity of any other cylinder in United States gallons is obtained by multiplying the square of its diameter by its length, or the capacity of any other sphere by the cube of its diameter and by the number of United States gallons contained as above in the unity of its measurement.

OF THE SQUARE, RECTANGLE, CUBE, ETC.

1. The side of a square equals the square root of its area.

2. The area of a square equals the square of one of its sides.

3. The diagonal of a square equals the square root of twice the square of its side.

4. The side of a square is equal to the square root of half the square of its diagonal.

5. The side of a square equal to the diagonal of a given square contains double the area of the given square.

6. The area of a rectangle equals its length multiplied by its breadth,

7. The length of a recangle equals the area divided by the breadth ; or the breadth equals the area divided by the length.

8. The solidity of a cube equals the area of one of its sides multiplied by the length or breadth of one of its sides.

9. The length of a side of a cube equals the cube root of its solidity.

10. The capacity of a 12-inch tube equals 7.48 United States gallons.

OF TRIANGLES, POLYGONS, ETC.

1. The complement of an angle is its defect from a right angle.

2. The supplement of an angle is its defect from two right angles.

3. The three angles of every triangle are equal to two right angles : hence the oblique angles of a right angled triangle are each other's complements.

4. The sum of the squares of two given sides of a right angled triangle is equal to the square of the hypotenuse.

5. The difference between the squares of the hypotenuse and given side of a right angled triangle is equal to the square of the required side.

6. The area of a triangle equals half the product of the base multiplied by the perpendicular height.

7. The side of any regular polygon multiplied by its apothem or perpendicular, and by the number of its sides, equals twice the area.

OF ELLIPSES, CONES, FRUSTUMS, ETC.

1. The square root of half the sum of the squares of the two diameters of an ellipse multiplied by 3.1416 equals its circumference.

2. The product of the two axes of an ellipse multiplied by .7854 equals its area.

3. The curve surface of a cone is equal to half the product of the circumference of its base multiplied by its slant side, to which, if the area of the base be added, the sum is the whole surface.

4. The solidity of a cone equals one-third the product of its base multiplied by its altitude or height.

5. The square of the diameters of the two ends of the frustum of a cone added to the product of the two diameters, and that sum multiplied by its height and by .2618, equals its solidity.

DEFINITIONS OF ARITHMETICAL SIGNS USED
IN THE FOLLOWING CALCULATIONS.

$=$	Sign of Equality,	and signifies as	$4 + 6 = 10$.
$+$	“ Addition,	“	as $6 + 6 = 12$, the Sum.
$-$	“ Subtraction,	“	as $6 - 2 = 4$, Remain- der.
\times	“ Multiplication,	“	as $8 \times 3 = 24$, Product.
\div	“ Division,	“	as $24 \div 3 = 8$,
$\sqrt{\quad}$	“ Square Root,	“	Extraction of Square Root.
6^2	“ to be squared,	“	thus $8^2 = 64$.
7^3	“ to be cubed,	“	thus $3^3 = 27$.

DECIMAL EQUIVALENTS TO FRACTIONAL PARTS OF LINEAL MEASUREMENT.

ONE INCH THE INTEGER OR WHOLE NUMBER.

.96875	equal	7/8 and 3-32	.46875	equal	3/8 and 3-32
.9375	"	7/8 and 1-16	.4375	"	3/8 and 1-16
.90625	"	7/8 and 1-32	.40625	"	3/8 and 1-32
.875	"	7/8	.375	"	3/8
.84375	"	3/4 and 3-32	.34375	"	1/4 and 3-32
.8125	"	3/4 and 1-16	.3125	"	1/4 and 1-16
.78125	"	3/4 and 1-32	.28125	"	1/4 and 1-32
.75	"	3/4	.25	"	1/4
.71875	"	5/8 and 3-32	.21875	"	1/8 and 3-32
.6875	"	5/8 and 1-16	.1875	"	1/8 and 1-16
.65625	"	5/8 and 1-32	.15625	"	1/8 and 1-32
.625	"	5/8	.125	"	1/8
.59375	"	1/2 and 3-32	.09375	"	3-32
.5625	"	1/2 and 1-16	.0625	"	1-16
.53125	"	1/2 and 1-32	.03125	"	1-32
.5	"	1/2			

ONE FOOT OR TWELVE INCHES THE INTEGER.

.9166	equal	11 inches.	.1666	equal	2 inches.
.8333	"	10 "	.0833	"	1 "
.75	"	9 "	.07291	"	7/8 "
.6666	"	8 "	.0625	"	3/4 "
.5833	"	7 "	.05208	"	5/8 "
.5	"	6 "	.04166	"	1/2 "
.4166	"	5 "	.03125	"	3/8 "
.3333	"	4 "	.02083	"	1/4 "
.25	"	3 "	.01041	"	1/8 "

MENSURATION OF SURFACES.

MENSURATION is that branch of Mathematics which is employed in ascertaining the extension, solidities and capacities of bodies capable of being measured.

MENSURATION OF SURFACES.

To Measure or Ascertain the Quantity of Surface In Any Right Lined Figure whose Sides are Parallel to Each Other.

RULE.—Multiply the length by the breadth or perpendicular height, and the product will be the area or superficial contents.

APPLICATION OF THE RULE TO PRACTICAL PURPOSES.

The sides of a square piece of iron are $9\frac{7}{8}$ inches in length, required the area.

Decimal equivalent to the fraction $\frac{7}{8} = .875$, and $9.875 \times 9.875 = 97.5$, etc., square inches, the area.

The length of a roof is 60 feet 4 inches and its width 25 feet 3 inches; required the area of the roof.

4 inches = .333 and 3 inches = .25 (see table of equivalents), hence, $60.333 \times 25.25 = 1523.4$ square feet, the area.

TRIANGLES.

To Find the Area of a Triangle When the Base and Perpendicular are Given.

RULE.—*Multiply the base by the perpendicular height and half the product is the area.*

The base of the triangle is 3 feet 6 inches in length and the height 1 foot 9 inches; required the area.

6 in. = .5 and 9 in. = .75, hence, $\frac{3.5 \times 1.75}{2} = 3.0625$ square feet, the area.

Any Two Sides of a Right Angled Triangle being Given, to Find the Third.

WHEN THE BASE AND PERPENDICULAR ARE GIVEN TO FIND THE HYPOTHENUSE.

Add the square of the base to the square of the perpendicular and the square root of the sum will be the hypotenuse.

The base of the triangle is 4 feet and the perpendicular 3 feet; then $4^2 + 3^2 = 25$, $\sqrt{25} = 5$ feet, the hypotenuse.

WHEN THE HYPOTHENUSE AND BASE ARE GIVEN TO FIND THE PERPENDICULAR.

From the square of the hypotenuse subtract the square of the base, and the square root of the remainder will be the perpendicular.

The hypotenuse of the triangle is 5 feet and the base 4 feet; then $5^2 - 4^2 = 9$, and $\sqrt{9} = 3$, the perpendicular.

WHEN THE HYPOTHENUSE AND PERPENDICULAR ARE GIVEN TO FIND THE BASE.

From the square of the hypotenuse subtract the square of the perpendicular, and the square root of the remainder will be the base.

OF POLYGONS.

To Find the Area of a Regular Polygon.

RULE.—Multiply the length of a side by half the distance from the side to the center, and that product by the number of sides; the last product will be the area of the figure.

EXAMPLE.—The side of a regular hexagon is 12 inches, and the distance therefrom to the center of the figure is 10 inches: required the area of the hexagon.

$$\frac{10}{2} \times 12 \times 6 = 360 \text{ square inches} = 2\frac{1}{2} \text{ square feet. Ans.}$$

To Find the Area of a Regular Polygon when the Side Only is Given.

RULE.—Multiply the square of the side by the multiplier opposite to the name of the polygon in the ninth column of the following table, and the product will be the area.

Table of angles relative to the construction of Regular Polygons with the aid of the sector, and of coefficients to facilitate their construction without it; also, of coefficients

to aid in finding the area of the figure, the side only being given.

Names.	Number of sides.	Angle at center.	Angle at circum.	Perp'n side being 1.	Length of side rad. being 1.	Rad. of cir. side being 1.	Rad. of cir. per. being 1.	Area side being 1.
Triangle	3	120	60	.28868	1.732	.5773	2.	.433012
Square	4	90	90	.5	1.414	.7071	1.414	1.
Pentagon	5	72	108	.6882	1.175	.8506	1.238	1.720477
Hexagon	6	60	120	.566	1.	1.	1.156	2.598076
Heptagon	7	51 3-7	128 4-7	1.0382	.8672	1.152	1.11	3.633912
Octagon	8	45	135	1.2971	.7654	1.3065	1.08	4.828427
Nonagon	9	40	140	1.3737	.684	1.4619	1.06	6.181824
Decagon	10	36	144	1.5388	.618	1.618	1.05	7.694208
Undecagon	11	32 8-11	147 3-11	1.7028	.5634	1.7747	1.04	9.36564
Dodecagon	12	30	150	1.866	.5176	1.9318	1.037	11.196152

NOTE.—“ Angle at center ” means the angle of radii passing from the center to the circumference or corners of the figure. “ Angle at circumference ” means the angle which any two adjoining sides make with each other.

THE CIRCLE AND ITS SECTIONS.

OBSERVATIONS AND DEFINITIONS.

1. The circle contains a greater area than any other plane figure bounded by the same perimeter or outline.
2. The areas of circles are to each other as the squares of their diameters; any circle twice the diameter of another contains four times the area of the other.
3. The radius of a circle is a straight line drawn from the center to the circumference.
4. The diameter of a circle is a straight line drawn

through the center and terminating both ways in the circumference.

5. A chord is a straight line joining any two points of the circumference.

6. The versed sine is a straight line joining the chord and the circumference.

7. An arc is any part of the circumference.

8. A semicircle is half the circle cut off by a diameter.

9. A segment is any portion of a circle cut off by a chord.

10. A sector is a part of a circle cut off by two radii.

GENERAL RULES IN RELATION TO THE CIRCLE.

1. Multiply the diameter by 3.1416, the product is the circumference.

2. Multiply the circumference by .31831, the product is the diameter.

3. Multiply the square of the diameter by .7854 and the product is the area.

4. Multiply the square root of the area by 1.12837, the product is the diameter.

5. Multiply the diameter by .8862, the product is the side of a square of equal area.

6. Multiply the side of a square by 1.128, the product is the diameter of a circle of equal area.

APPLICATION OF THE RULES TO PRACTICAL PURPOSES.

1. The diameter of a circle being 5 feet 6 inches, required its circumference.

$$5.5 \times 3.1416 = 17.27880 \text{ feet, the circumference.}$$

2. A straight line or the circumference of a circle being 17.27880 feet, required the circle's diameter corresponding thereto.

$$17.27880 \times .31831 = 5.5000148280 \text{ feet, diameter.}$$

3. The diameter of a circle is $9\frac{3}{8}$ inches; what is its area in square inches?

$9.375^2 = 87.89$, etc., $\times .7854 = 69.029$, etc., inches, the area.

4. What must the diameter of a circle be to contain an area equal to 69.029296875 square inches?

$\sqrt{69.02929}$, etc., $= 8.3091 \times 1.12837 = 9.375$, etc., or $9\frac{3}{8}$ inches, the diameter.

5. The diameter of a circle is $15\frac{1}{2}$ inches; what must each side of a square be to be equal in area to the given circle?

$$15.5 \times .8862 = 13.73$$
, etc., inches, length of side.

6. Each side of a square is 13.736 inches in length; what must the diameter of a circle be to contain an area equal to the given square?

$$13.736 \times 1.128 = 15.49$$
, etc., or $15\frac{1}{2}$ inches, the diameter.

Any Chord and Versed Sine of a Circle being Given, to Find the Diameter.

RULE.—Divide the sum of the squares of the versed size and one-half the chord by the versed sine; the quotient is the diameter of corresponding circle.

7. The chord of a circle equals 8 feet and the versed sine equals $1\frac{1}{2}$; required the circle's diameter.

$$8^2 + 1.5^2 = 66.25 \div 1.5 = 44.16$$
 feet, the diameter.

8. In the curve of a railway I stretched a line 80 feet in length and the distance from the line to the curve I found to be 9 inches; required the circle's diameter.

$80^2 + .75^2 = 640.5625 \div 2 = 320.28$, etc., feet, the diameter.

To Find the Length of Any Arc of a Circle.

RULE.—From eight times the chord of half the arc subtract the chord of the whole arc, and one-third of the remainder will be the length, nearly.

Required the length of an arc, the chord of half the arc being $8\frac{1}{2}$ feet and chord of whole arc 16 feet 8 inches.

$8.5 \times 8 = 68.0 - 16.666 = \frac{51.334}{3} = 17.111\frac{1}{3}$ cubic feet, the length of the arc.

To Find the Area of the Sector of a Circle.

RULE.—Multiply the length of the arc by half the length of the radius.

The length of the arc equals $9\frac{1}{2}$ inches and the radii equal each 7 inches; required the area.

$9.5 \times 3.5 = 33.25$ inches, the area.

To Find the Area of a Segment of a Circle.

RULE.—Find the area of a sector whose arc is equal to that of the given segment, and if it be less than a semicircle subtract the area of the triangle formed by the chord of segment and radii of its extremities; but if more than a semicircle add area of triangle to the area of the sector, and the remainder or sum is the area of the segment.

To Find the Area of the Space Contained Between Two Concentric Circles or the Area of a Circular Ring.

RULE I.—Multiply the sum of the inside and outside diameters by their difference and by .7854; the product is the area.

RULE 2.—*The difference of the area of the two circles will be the area of the ring or space.*

Suppose the external circle equal 4 feet and the internal circle $2\frac{1}{2}$ feet, required the area of space contained between them or area of a ring.

$4 + 2.5 = 6.5$ and $4 - 2.5 = 1.5$, hence, $6.5 \times 1.5 \times .7854 = 7.65$ feet, the area; or,

The area of 4 feet is 12.566; the area of 2.5 is 4.9081. (See table of areas of circles.)

$12.566 - 4.9081 = 7.6579$, the area.

To Find the Area of an Ellipse or Oval.

RULE.—*Multiply the diameters together and their product by .7854.*

An oval is 20 x 15 inches, what are its superficial contents?

$20 \times 15 \times .7854 = 235.62$ inches, the area.

To Find the Circumference of an Ellipse or Oval.

RULE.—*Multiply half the sum of the two diameters by 3.1416 and the product will be the circumference.*

EXAMPLE.—An oval is 20 x 15 inches, what is the circumference.

$\frac{20 + 15}{2} = 17.5 \times 3.1416 = 54.978$ inches; the circumference.

OF CYLINDERS.

To Find the Convex Surface of a Cylinder.

RULE.—*Multiply the circumference by the height or length, the product will be the surface.*

EXAMPLE.—The circumference of a cylinder is 6 feet

4 inches and its length 15 feet, required the convex surface.

$$6.333 \times 15 = 94.995 \text{ square feet, the surface.}$$

OF CONES AND PYRAMIDS.

To Find the Convex Surface of a Right Cone or Pyramid.

RULE.—Multiply the circumference of the base by the slant height and half the product is the slant surface; if the surface of the entire figure is required, add the area of the base to the convex surface.

EXAMPLE.—The base of a cone is 5 feet diameter and the slant height is 7 feet, what is the convex surface?

$$5 \times 3.1416 = 15.70 \text{ circumference of the base and}$$

$$\frac{15.70 \times 7}{2} = 54.95 \text{ square feet, the convex surface.}$$

To Find the Convex Surface of a Frustum of a Cone or Pyramid.

RULE.—Multiply the sum of the circumference of the two ends by the slant height and half the product will be the slant surface.

The diameter of the top of the frustum of a cone is 3 feet, the base 5 feet, the slant height 7 feet 3 inches; required the slant surface.

$$9.42 + 15.7 = \frac{25.12 \times 7.25}{2} = 91.06 \text{ square feet, slant surface.}$$

OF SPHERES.

To Find the Convex Surface of a Sphere or Globe.

RULE.—Multiply the diameter of the sphere by its circumference and the product is its surface; or,

Multiply the square of the diameter by 3.1416; the product is the surface.

What is the convex surface of a globe $6\frac{1}{2}$ feet in diameter?

$6.5 \times 3.1416 \times 6.5 = 132.73$ square feet; or, $6.5^2 = 42.25 \times 3.1416 = 132.73$ square feet, the convex surface.

MENSURATION OF SOLIDS AND CAPACITIES OF BODIES.

To Find the Solidity or Capacity of Any Figures in the Cubical Form.

RULE.—Multiply the length of any one side by its breadth and by the depth or distance to its opposite side, and the product is the solidity in equal terms of measurement.

EXAMPLE.—The side of a cube is 20 inches; what is its solidity?

$20 \times 20 \times 20 = 8000$ cubic inches, or 4.6296 cubic feet, nearly.

A rectangular tank is in length 6 feet, in breadth $4\frac{1}{2}$ feet and its depth 3 feet; required its capacity in cubic feet; also its capacity in United States standard gallons.

$6 \times 4.5 \times 3 = 81$ cubic feet; $81 \times 1728 = 139,968 \div 231 = 605.92$ gallons.

OF CYLINDERS.

To Find the Solidity of Cylinders.

RULE.—*Multiply the area of the base by the hight and the product is its solidity.*

EXAMPLE.—The base of a cylinder is 18 inches and hight 40 inches ;

$$18^2 \times .7854 \times 40 = 10,178.7840 \text{ cubic inches.}$$

To Find the Contents in Gallons of Cylindrical Vessels.

RULE.—*Take the dimensions in inches and decimal parts of an inch. Square the diameter, multiply it by the hight, then multiply the product by .0034 for wine gallons, or by .002785 for beer gallons.*

EXAMPLE.—How many United States gallons will a cylinder contain whose diameter is 18 inches and length 30 inches ?

$$18^2 \times 30 = 9720 \times .0034 = 33.04. \text{ etc., gallons.}$$

OF CONES AND PYRAMIDS.

To Find the Solidity of a Cone or a Pyramid.

RULE.—*Multiply the area of the base by the perpendicular hight and one-third the product will be the solidity.*

EXAMPLE.—The base of a cone is $2\frac{1}{4}$ feet and the hight is $3\frac{3}{4}$ feet, what is the solidity ?

$$\frac{2.25^2 \times .7854 \times 3.75}{3} = 4.97 \text{ cubic feet, the solidity.}$$

To Find the Solidity of the Frustum of a Cone.

RULE.—To the product of the diameters of the ends add one-third the square of the difference of the diameters; multiply the sum by .7854 and the product will be the mean area between the ends, which multiplied by the perpendicular height of frustum gives the solidity.

EXAMPLE.—The diameter of the large end of a frustum of a cone is 10 feet, that of the smaller end is 6 feet and the perpendicular height 12 feet, what is its solidity?

$10 - 6 = 4^2 = 16 \div 3 = 5.333$ square of difference of ends; and $10 \times 6 + 5.333 = 65.333 \times .7854 \times 12 = 615.75$ cubic feet, the solidity.

To Find the Contents in U. S. Standard Gallons of the Frustum of a Cone.

RULE.—To the product of the diameters, in inches and decimal parts of an inch, of the ends, add one-third the square of the difference of the diameters. Multiply the sum by the perpendicular height in inches and decimal parts of an inch and multiply that product by .0034 for wine gallons, and by .002785 for beer gallons.

EXAMPLE.—The diameter of the large end of a frustum of a cone is 8 feet, that of the smaller end is 4 feet and the perpendicular height 10 feet; what are the contents in United States standard gallons?

$96 - 48 = 48^2 = 2304 \div 3 = 768$; $96 \times 48 + 768 = 5376 \times 120 \times .0034 = 2193.4$ gallons.

To Find the Solidity of the Frustum of a Pyramid.

RULE.—Add to the areas of the two ends of the frustum the square root of their product, and this sum multi-

plied by one-third of the perpendicular hight will give the solidity.

EXAMPLE.—What is the solidity of a hexagonal pyramid, a side of the large end being 12 feet, one of the smaller ends 6 feet and the perpendicular hight 8 feet?

$374.122 \times 93.53 = \sqrt{34,991.63} = 187.06$ $374.122 + 93.53 + 187.06 = \frac{654.712 \times 8}{3} = 1745.898$ cubic feet, solidity.

To Find the Solidity of a Sphere.

RULE.—Multiply the cube of the diameter by .5236 and the product is the solidity.

EXAMPLE.—What is the solidity of a sphere, the diameter being 20 inches?

$20^3 = 8000 \times .5236 = 4188.8$ cubic inches, the solidity.

TABLES, RULES AND RECIPES.

BLACK SHEET IRON.

Black Sheets are rolled to the following Standard Gauges adopted by the United States, taking effect July 1, 1893.

Number of gauge.	THICKNESS.		WEIGHT.	
	Approximate thickness in fractions of an inch.	Approximate thickness in decimal parts of an inch.	Weight per square foot in ounces avoirdupois.	Weight per square foot in pounds avoirdupois.
10.....	9-64	.140625	90	5.625
11.....	1-8	.125	80	5.
12.....	7-64	.109375	70	4.375
13.....	3-32	.09375	60	3.75
14.....	5-64	.078125	50	3.125
15.....	9-128	.0703125	45	2.8125
16.....	1-16	.0625	40	2.5
17.....	9-160	.05625	36	2.25
18.....	1-20	.05	32	2.
19.....	7-160	.04375	28	1.75
20.....	3-80	.0375	24	1.50
21.....	11-320	.034375	22	1.375
22.....	1-32	.03125	20	1.25
23.....	9-320	.028125	18	1.125
24.....	1-40	.025	16	1.
25.....	7-320	.021875	14	.875
26.....	3-160	.01875	12	.75
27.....	11-640	.0171875	11	.6875
28.....	1-64	.015625	10	.625
29.....	9-640	.0140625	9	.5625
30.....	1-80	.0125	8	.5
31.....	7-640	.0109375	7	.4375
32.....	13-1280	.01015625	6½	.40625

A variation of 2½ per cent. either way is allowed.

PLATE IRON.

The following table gives the weight per square foot for iron plates 1-16 inch up to ½ inch thick.

Thickness.	Weight in lbs.	Thickness.	Weight in lbs.
1-16	2.50	5-16	12.50
1-8	5.00	3-8	15.00
3-16	7.50	7-16	17.50
1-4	10.00	1-2	20.00

Tables, Rules and Recipes.

WEIGHT OF SHEET LEAD.

The thickness of lead is in common determined or understood by the weight, the unit being that of a square or superficial foot; thus:

4 lbs. lead is 1-16 inch in thickness; 6 do. 1-10 do.; 7½ do. 1-8 do.; 11 do. 3-16 do.; 15 do. 1-4 do.

DECIMALS EQUIVALENT TO THE FRACTIONAL PARTS OF A POUND.

.03125	½ oz.	.28125	4½ oz.	.53125	8½ oz.	.78125	12½ oz.
.0625	1 "	.3125	5 "	.5625	9 "	.8125	13 "
.09375	1½ "	.34375	5½ "	.59375	9½ "	.84375	13½ "
.125	2 "	.375	6 "	.625	10 "	.875	14 "
.15625	2½ "	.40625	6½ "	.65625	10½ "	.90625	14½ "
.1875	3 "	.4375	7 "	.6875	11 "	.9375	15 "
.21875	3½ "	.46875	7½ "	.71875	11½ "	.96875	15½ "
.25	4 "	.5	8 "	.75	12 "	1.	16 "

DECIMALS EQUIVALENT TO THE FRACTIONAL PARTS OF AN INCH WHEN DIVIDED INTO 32 PARTS; LIKEWISE THE DECIMALS EQUIVALENT TO THE FRACTIONAL PARTS OF A FOOT.

Decimals.	Parts of an inch.	Decimals.	Parts of an inch.	Decimals.	Parts of a foot.
.03125	1-32	.53125	½ and 1-32	.01041	⅛
.0625	1-16	.5625	½ and 1-16	.02083	¼
.09375	3-32	.59375	½ and 3-32	.03125	⅜
.125	⅛	.625	⅝	.04166	½
.15625	⅛ and 1-32	.65625	⅝ and 1-32	.05208	⅝
.1875	⅛ and 1-16	.6875	⅝ and 1-16	.0625	¾
.21875	⅛ and 3-32	.71875	⅝ and 3-32	.07291	⅞
.25	¼	.75	¾	.0833	1
.28125	¼ and 1-32	.78125	¾ and 1-32	.1666	2
.3125	¼ and 1-16	.8125	¾ and 1-16	.25	3
.34375	¼ and 3-32	.84375	¾ and 3-32	.3333	4
.375	⅜	.875	⅞	.4166	5
.40625	⅜ and 1-32	.90625	⅞ and 1-32	.5	6
.4375	⅜ and 1-16	.9375	⅞ and 1-16	.5833	7
.46875	⅜ and 3-32	.96875	⅞ and 3-32	.6666	8
.5	½	1.	1 inch.	.75	9
				.8333	10
				.9166	11

TO ASCERTAIN THE WEIGHTS OF PIPES OF VARIOUS METALS,
AND ANY DIAMETER REQUIRED.

Thick. Inch.	Wrought iron.	Copper.	Lead.	Thick. Inch.	Wrought iron.	Copper.	Lead.
1-32	.326	.38	.483	5-32	1.627	1.9	2.417
1-16	.653	.76	.967	3-16	1.95	2.28	2.9
3-32	.976	1.14	1.45	7-32	2.277	2.66	3.383
1-8	1.3	1.52	1.933	1-4	2.6	3.04	3.867

RULE.—*To the interior diameter of the pipe, in inches, add the thickness of the metal; multiply the sum by the decimal number opposite the required thickness and under the metal's name; also by the length of the pipe in feet; and the product is the weight of the pipe in pounds.*

1. Required the weight of a copper pipe whose interior diameter is $2\frac{1}{2}$ inches, its length 20 feet, and the metal $\frac{1}{8}$ inch in thickness.

$$2.25 + .125 = 2.375 \times 1.52 \times 20 = 72.2 \text{ pounds.}$$

WEIGHT OF GALVANIZED SHEETS.

Ounces per square foot.			Ounces per square foot.			Ounces per square foot.		
No. 14.....	52½		No. 20.....	26½		No. 26.....	14½	
No. 15.....	47½		No. 21.....	24½		No. 27.....	13½	
No. 16.....	42½		No. 22.....	22½		No. 28.....	12½	
No. 17.....	38½		No. 23.....	20½		No. 29.....	11½	
No. 18.....	34½		No. 24.....	18½		No. 30.....	10½	
No. 19.....	30½		No. 25.....	16½				

ORDINARY DIMENSIONS OF GALVANIZED SHEETS.

Widths	40	38	36	34	32	30	28	26	24	22	20
Gauges.	Lengths.										
No. 14.....	96	96	96	96	96	96	96	96	96
Nos. 16 to 22....	120	120	120	120	120	120	120	120	120	120	120
Nos. 23 and 24....	96	96	96	96	108	120	120	120	120	108	108
Nos. 25 to 28....	96	96	108	120	120	120	120	108	108
Nos. 29 and 30....	96	96	96	96

SIZES OF TIN WARE IN THE FORM OF FRUSTUM OF A CONE.

PANS.

Size.	Diam. of top.	Diam. of bot.	Hight.	Size.	Diam. of top.	Diam. of bot.	Hight.
20 qt.	19½ in.	13 in.	8 in.	2 qt.	9 in.	6 in.	3¾ in.
16 "	18 "	11¼ "	6¼ "	3 pt.	8¼ "	5¾ "	2¾ "
14 "	15¼ "	9¼ "	6¼ "	1 "	6¼ "	4 "	2¾ "
10 "	14¾ "	11 "	4¾ "	Pie	9 "	7½ "	1¾ "
6 "	12¾ "	9 "	4 "				

DISH KETTLES AND PAILS.

Size.	Diam. of top.	Diam. of bot.	Hight.	Size.	Diam. of top.	Diam. of bot.	Hight.
14 qt.	13 in.	9 in.	9 in.	6 qt.	9¼ in.	5½ in.	6½ in.
10 "	11½ "	7 "	8 "	2 "	6¼ "	4 "	4 "

COFFEE POTS.

Size.	Diam. of top.	Diam. of bot.	Hight.	Size.	Diam. of top.	Diam. of bot.	Hight.
1 gal.	4 in.	7 in.	8½ in.	3 qt.	3½ in.	6 in.	8½ in.

WASH BOWLS.

Size	Diam. of top.	Diam. of bot.	Hight.
Large wash bowl.....	11 in.	5¾ in.	5 in.
Cullender	11 "	5¾ "	5 "
Small wash bowl.....	9½ "	5½ "	3¾ "
Milk strainer.....	9½ "	5½ "	3¾ "

DIPPERS.

Size.	Diam. of top.	Diam. of bot.	Hight.	Size.	Diam. of top.	Diam. of bot.	Hight.
½ gal.	6½ in.	4 in.	4 in.	1 pt.	4¼ in.	3¾ in.	2¾ in.

MEASURES.

Size.	Diam. of top.	Diam. of bot.	Hight.	Size.	Diam. of top.	Diam. of bot.	Hight.
1 gal.	5½ in.	6¼ in.	9¼ in.	1 pt.	2¾ in.	3¾ in.	4¼ in.
½ "	4 "	4¾ "	8 "	½ "	2¾ "	2¾ "	3¾ "
1 qt.	3½ "	4 "	5¾ "				

DRUGGISTS' AND LIQUOR DEALERS' MEASURES.

Size.	Diam. of top.	Diam. of bot.	Hight.	Size.	Diam. of top.	Diam. of bot.	Hight.
5 gal.	8 in.	13½ in.	12¾ in.	½ gal.	3¾ in.	6¾ in.	6 in.
3 "	7 "	11½ "	10¼ "	1 qt.	2½ "	5¾ "	4¾ "
2 "	6 "	10½ "	8¾ "	1 pt.	2 "	4 "	4 "
1 "	3¾ "	8¾ "	7½ "	½ "	1¾ "	3¾ "	3¾ "

NET WEIGHT PER BOX TIN PLATES.

Basis 10 x 14, 225 sheets; or, 14 x 20, 112 sheets.

Trade term.....	80 lb.	85 lb.	90 lb.	95 lb.	100 lb.	IC	IXL	IX	IXX	IXXX	IXXXX
Approximate wire gauge	No. 34	No. 33	No. 32	No. 31½	No. 31	No. 30	No. 28½	No. 28	No. 27	No. 26	No. 25
Weight per box, pounds.....	85	85	90	95	100	107	128	135	156	176	196
Size of Sheets	85	85	90	95	100	107	128	135	156	176	196
per box.	80	85	90	95	100	107	128	135	156	176	196
10 x 14	225	85	90	95	100	107	128	135	156	176	196
14 x 20	112	85	90	95	100	107	128	135	156	176	196
20 x 28	112	160	180	190	200	214	256	270	312	352	392
10 x 20	225	114	120	136	143	153	183	193	223	251	280
11 x 11	225	69	78	82	86	92	111	117	135	152	169
11 x 22	225	138	147	156	164	172	222	234	270	304	339
11½ x 23	225	151	161	170	179	189	242	255	295	333	370
12 x 12	225	82	93	98	103	110	132	139	160	181	202
12 x 24	112	82	93	98	103	110	132	139	160	181	202
13 x 13	225	97	103	109	115	121	154	163	188	212	236
13 x 26	112	97	103	109	115	121	154	163	188	212	236
14 x 14	225	112	119	126	133	140	179	189	218	246	274
14 x 28	112	112	119	126	133	140	179	189	218	246	274
15 x 15	225	129	137	145	153	161	206	217	251	283	315
16 x 16	225	146	155	165	174	183	234	247	285	322	358
17 x 17	225	165	175	186	196	206	264	279	322	363	405
18 x 18	112	93	104	110	116	124	148	156	180	204	227
19 x 19	112	103	110	116	122	129	165	174	201	227	253
20 x 20	112	114	121	129	136	143	183	193	223	251	280
21 x 21	112	126	134	142	150	158	202	213	246	277	309
22 x 22	112	138	147	156	164	172	221	234	270	304	339

NET WEIGHT PER BOX TIN PLATES.

Basis 10 x 14, 225 sheets; or, 14 x 20, 112 sheets.

Trade term.....	80 lb.	85 lb.	90 lb.	95 lb.	100 lb.	100 lb.	IC	IX	IX	IX	IX	IX	IX	IX	IX	IX	IX	IX
Approximate wire gauge	No. 34	No. 33	No. 32	No. 31½	No. 31	No. 30	No. 28½	No. 28	No. 27	No. 26	No. 25							
Weight per box, pounds	80	85	90	95	100	107	128	135	156	176	196							
Size of Sheets, sheets, per box.																		
23 x 23	151	161	170	179	189	202	242	255	295	333	370							
24 x 24	164	175	185	195	204	220	263	278	321	362	404							
26 x 26	193	205	217	229	241	258	309	326	377	424	472							
19½ x 19½	75	80	85	94	94	100	120	127	147	165	183							
14 x 18¾	83	88	93	98	103	110	132	139	161	182	202							
14 x 19¼	83	88	93	98	103	110	132	139	161	182	202							
14 x 21	84	89	95	100	105	112	134	142	164	185	206							
14 x 22	88	94	99	105	110	118	141	149	172	194	216							
15 x 21	80	85	90	95	101	107	144	152	176	197	220							
16 x 20	91	97	103	109	114	122	146	154	178	201	224							
14 x 31	124	132	140	147	155	165	198	209	242	273	304							
Approximate wire gauge D plates.....No. 28																		
12½ x 17D	100	100	100	100	100	100	100	100	100	100	100	No. 25	No. 24	No. 23	No. 22	No. 21	No. 20	No. 19
17 x 25D	50	50	50	50	50	50	50	50	50	50	50	122	142	162	182	202	222	242
15 x 21D	100	100	100	100	100	100	100	100	100	100	100	122	142	162	182	202	222	242
14 x 20																		
10 x 14																		
Sheets Pounds																		
per box, per box.																		
112 107																		
128 112																		
150 112																		
180 112																		
225 112																		
20 x 28																		
Sheets Pounds																		
per box, per box.																		
112 214																		
128 224																		
150 224																		
180 224																		
225 224																		
20 x 40																		
Sheets Pounds																		
per box, per box.																		
79 224																		
79 180																		
79 160																		

SHEET ZINC.

Numbers . . . #	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	
Weight per sq. foot. . .	.30	.37	.45	.52	.60	.67	.75	.90	1.05	1.20	1.35	1.50	1.68	1.87	2.06	2.25	2.62	3.00	3.37
Approximate thickness in inches . .	.008	.010	.012	.014	.016	.018	.020	.024	.028	.032	.036	.040	.045	.050	.055	.060	.070	.080	.090
Size of Sq. ft. sheet, per sht.																			

APPROXIMATE WEIGHT PER SHEET.

24 x 84 14.	4.2	5.2	6.3	7.3	8.4	9.4	10.5	12.6	14.7	16.8	18.9	21.	23.5	26.2	28.9	31.5	36.7	42.	47.2
26 x 84 15.2	4.6	5.6	6.9	7.9	9.1	10.2	11.3	13.7	16.	18.3	20.5	22.8	25.6	28.4	31.3	34.2	39.9	45.6	51.2
28 x 84 16.3	4.9	6.	7.4	8.5	9.8	10.9	12.2	14.7	17.1	19.6	22.	24.5	27.4	30.5	33.6	36.7	42.7	48.9	54.9
30 x 84 17.5	5.3	6.5	7.9	9.1	10.5	11.8	13.2	15.8	18.4	21.	23.6	26.2	29.4	32.8	36.1	39.4	45.8	52.5	59.
32 x 84 18.7	5.6	6.9	8.4	9.7	11.2	12.6	14.1	16.9	19.7	22.5	25.3	28.8	31.4	35.	38.5	42.	49.	56.1	63.
34 x 84 19.9	6.0	7.4	9.	10.4	12.	13.4	15.	18.	20.9	23.9	26.9	29.9	33.4	37.2	41.	44.8	52.2	59.7	67.
36 x 84 21.	6.3	7.8	9.5	10.9	12.6	14.1	15.8	18.9	22	25.2	28.4	31.5	35.3	39.3	43.5	47.2	55.	63.	70.8
36 x 96 24.	7.2	8.9	10.8	12.5	14.4	16.1	18.	21.6	25.2	28.8	32.4	36.	40.3	44.9	49.5	54.	62.8	72.	80.9
36 x 108 27.	8.1	10.	12.2	14.1	16.2	18.1	20.3	24.3	28.4	32.4	36.5	40.5	45.4	50.5	55.6	60.7	70.7	81.	91.
40 x 84 23.4	7.	8.7	10.6	12.2	14.1	15.7	17.6	21.6	24.6	28.1	31.6	35.1	39.3	43.8	48.2	52.6	61.3	70.2	78.8
40 x 96 26.8	8.	9.9	12.1	14.	16.1	18.	20.1	24.1	28.1	32.2	36.2	40.2	45.	50.1	55.2	60.3	70.2	80.4	90.3
44 x 84 25.7	7.7	9.5	11.6	13.4	15.4	17.2	19.3	23.1	27.	30.8	34.7	38.6	43.2	48.1	53.	57.8	67.4	77.1	86.6
46 x 90 28.7	8.6	10.6	12.9	14.9	17.2	19.2	21.5	25.8	30.1	34.4	38.7	43.	48.2	53.7	59.1	64.6	75.2	86.1	96.7
48 x 84 28.	8.4	10.4	12.6	14.6	16.8	18.8	21.	25.2	29.4	33.6	37.8	42.	47.	52.4	57.7	63.	73.4	84.	94.4
48 x 96 32.	9.6	11.9	14.1	16.7	19.2	21.5	24.	28.8	33.6	38.4	43.2	48.	53.8	59.9	65.9	72.	83.9	96.	107.8
50 x 108 31.5	11.3	13.9	16.9	19.5	22.5	25.1	28.2	33.8	39.3	45.	50.7	56.3	63.	70.1	77.3	84.4	98.3	112.5	126.1
52 x 84 30.4	9.1	11.3	13.7	15.8	18.3	20.4	22.8	27.4	31.9	36.5	41.	45.6	51.	56.9	62.6	68.4	79.6	91.2	102.5

Casks average about 600 pounds each. No. 4 to No. 17. Boxes average about 500 pounds. No. 18 and heavier.

RELATIVE WEIGHTS OF ALUMINUM AND COPPER SHEETS.

ROLLED ALUMINUM has a specific gravity of 2.72. One cubic foot weighs $169\frac{510}{1000}$ lbs. One square foot of one inch thick weighs $14\frac{136}{1000}$ lbs. Rolled Copper is 3.283 times heavier than similar sections of Rolled Aluminum.

Stub's gauge (nearest) No.	Thickness in decimal parts of 1 inch.	Oz. per square foot of copper.	Oz. per square foot of aluminum of same thickness.	Sheets 14 x 48 weight in pounds of copper.	Sheets 14 x 48 weight in pounds of aluminum of same thickness.	Sheets 24 x 48 weight in pounds of copper.	Sheets 24 x 48 weight in pounds of aluminum of same thickness.	Sheets 30 x 60 weight in pounds of copper.	Sheets 30 x 60 weight in pounds of aluminum of same thickness.	Sheets 36 x 72 weight in pounds of copper.	Sheets 36 x 72 weight in pounds of aluminum of same thickness.	Sheets 48 x 72 weight in pounds of copper.	Sheets 48 x 72 weight in pounds of aluminum of same thickness.
25	.00537	4	1.22	1.16	0.35	2	0.61	3.12	0.96	4.50	1.38	6	1.83
33	.00806	6	1.83	1.75	0.53	3	0.92	4.68	1.43	6.75	2.06	9	2.75
31	.0107	8	2.44	2.33	0.71	4	1.22	6.25	1.91	9	2.75	12	3.66
29	.0134	10	3.05	2.91	0.89	5	1.53	7.81	2.38	11.25	3.43	15	4.57
27	.0161	12	3.66	3.50	1.07	6	1.83	9.37	2.86	13.50	4.12	18	5.49
26	.0183	14	4.27	4.08	1.25	7	2.14	10.93	3.33	15.75	4.80	21	6.40
24	.0215	16	4.88	4.66	1.42	8	2.44	12.50	3.81	18	5.49	24	7.32
23	.0242	18	5.49	5.25	1.60	9	2.75	14.06	4.29	20.25	6.17	27	8.23
22	.0269	20	6.10	5.83	1.78	10	3.05	15.62	4.76	22.50	6.86	30	9.14
21	.0322	24	7.32	7	2.14	12	3.66	18.75	5.72	27	8.23	36	11.00
19	.0430	32	9.75	9.33	2.85	16	4.88	25	7.62	36	11.00	48	14.70
18	.0538	40	12.20	11.66	3.56	20	6.10	31.25	9.52	45	13.75	60	18.30
16	.0645	48	14.65	14	4.27	24	7.32	37.50	11.45	54	16.50	72	22.00
15	.0754	56	17.10	16.33	4.98	28	8.53	43.75	13.35	63	19.20	84	25.60
14	.0860	64	19.50	18.66	5.69	32	9.75	50	15.30	72	21.95	96	29.30
13	.095	70	21.35	35	10.70	55	16.80	79	24.10	105	32.00
12	.109	81	24.70	40½	12.40	63	19.20	91	27.75	122	37.20
11	.120	89	27.15	44½	13.60	70	21.35	100	30.50	134	40.85
10	.134	100	30.50	50	15.30	78	23.80	112	34.20	150	45.70
9	.148	110	33.55	55	16.80	86	26.20	124	37.80	165	50.30
8	.165	123	37.50	61	18.60	96	29.30	138	42.10	184	56.10
7	.180	134	40.85	67	20.40	105	32.00	151	46.00	201	61.30
6	.203	151	46.00	75½	23.00	118	36.00	170	51.80	227	69.20
5	.220	164	50.00	82	25.00	128	39.00	184	56.10	246	75.00
4	.238	177	53.95	88½	27.00	138	42.10	199	60.70	266	81.10
3	.259	193	64.30	96	29.30	151	46.00	217	66.10	289	88.10
2	.284	211	67.95	105½	32.20	165	50.30	238	72.50	317	96.60
1	.300	223	77.10	111½	34.00	174	53.10	251	76.50	335	102.20
0	.340	253	126½	38.60	198	60.40	285	86.90	380	116.00

One ounce per square foot aluminum sheet is 0.0044 inch thick and corresponds to about No. 37 B. & S. gauge.

SHEET COPPER.

Official table adopted by the Association of Copper Manufacturers of the United States.

Rolled copper has specific gravity of 8.93. One cubic foot weighs 558¹²⁵/₁₀₀₀ pounds. One square foot, of 1 inch thick, weighs 46⁵¹/₁₀₀ pounds.

Stubs' gauge (nearest) number.	Thickness in decimal parts of 1 inch.	Ounces per square foot.	Sheets 14 x 48, weight in lbs.	Sheets 24 x 48, weight in lbs.	Sheets 30 x 60, weight in lbs.	Sheets 36 x 72, weight in lbs.	Sheets 48 x 72, weight in lbs.
35.....	.00537	4	1.16	2	3.12	4.50	6
33.....	.00806	6	1.75	3	4.68	6.75	9
31.....	.0107	8	2.33	4	6.25	9	12
29.....	.0134	10	2.91	5	7.81	11.25	15
27.....	.0161	12	3.50	6	9.37	13.50	18
26.....	.0188	14	4.08	7	10.93	15.75	21
24.....	.0215	16	4.66	8	12.50	18	24
23.....	.0242	18	5.25	9	14.06	20.25	27
22.....	.0269	20	5.83	10	15.62	22.50	30
21.....	.0322	24	7	12	18.75	27	36
19.....	.0430	32	9.33	16	25	36	48
18.....	.0538	40	11.66	20	31.25	45	60
16.....	.0645	48	14	24	37.50	54	72
15.....	.0754	56	16.33	28	43.75	63	84
14.....	.0860	64	18.66	32	50	72	96
13.....	.095	70	35	55	79	105
12.....	.109	81	40 ¹ / ₂	63	91	122
11.....	.120	89	44 ¹ / ₂	70	100	134
10.....	.134	100	50	78	112	150
9.....	.148	110	55	86	124	165
8.....	.165	123	61	96	138	184
7.....	.180	134	67	105	151	201
6.....	.203	151	75 ¹ / ₂	118	170	227
5.....	.220	164	82	128	184	246
4.....	.238	177	88 ¹ / ₂	138	199	266
3.....	.259	193	96	151	217	289
2.....	.284	211	105 ¹ / ₂	165	238	317
1.....	.300	223	111 ¹ / ₂	174	251	335
0.....	.340	253	126 ¹ / ₂	198	285	380

TABLES

OF THE

CIRCUMFERENCES OF CIRCLES,

TO THE

NEAREST FRACTION OF PRACTICAL MEASUREMENT;

ALSO,

THE AREAS OF CIRCLES, IN INCHES AND DECIMAL PARTS,

LIKEWISE IN FEET AND DECIMAL PARTS, AS

MAY BE REQUIRED.

Rules that may render the following tables more generally useful.

1. Any of the areas in inches, multiplied by .052, or the areas in feet multiplied by 7.48, the product is the number of gallons at 1 foot in depth.

2. Any of the areas in feet, multiplied by .03704, the product equals the number of cubic yards at 1 foot in depth.

Dia. in inch.	Circum. in inch.	Area in sq. inch.	Side of = sq.	Dia. in inch.	Cir. in ft. in.	Area in sq. inch.	Area in sq. ft.
1-16	.196	.0030	.0554	1 in.	3 $\frac{1}{8}$.7854	$\frac{7}{8}$
1-8	.392	.0122	.1107	1 $\frac{1}{8}$	3 $\frac{1}{2}$.9940	$\frac{7}{8}$ and 3-32
3-16	.589	.0276	.1661	1 $\frac{1}{4}$	3 $\frac{3}{8}$	1.227	1 in.
1-4	.785	.0490	.2115	1 $\frac{3}{8}$	4 $\frac{1}{4}$	1.484	1 3-16
5-16	.981	.0767	.2669	1 $\frac{1}{2}$	4 $\frac{3}{8}$	1.767	1 5-16
3-8	1.178	.1104	.3223	1 $\frac{5}{8}$	5 $\frac{1}{8}$	2.074	1 7-16
7-16	1.374	.1503	.3771	1 $\frac{3}{4}$	5 $\frac{1}{2}$	2.405	1 9-16
				1 $\frac{7}{8}$	5 $\frac{3}{8}$	2.761	1 11-16
1-2	1.570	.1963	.4331	2 in.	6 $\frac{1}{4}$	3.141	1 $\frac{3}{4}$
9-16	1.767	.2485	.4995	2 $\frac{1}{8}$	6 $\frac{5}{8}$	3.546	1 $\frac{7}{8}$
5-8	1.963	.3068	.5438	2 $\frac{1}{4}$	7	3.976	2 in.
11-16	2.159	.3712	.6093	2 $\frac{3}{8}$	7 $\frac{3}{8}$	4.430	2 $\frac{1}{8}$
3-4	2.356	.4417	.6646	2 $\frac{1}{2}$	7 $\frac{3}{4}$	4.908	2 3-16
13-16	2.552	.5185	.7200	2 $\frac{5}{8}$	8 $\frac{1}{4}$	5.412	2 5-16
7-8	2.748	.6013	.7754	2 $\frac{3}{4}$	8 $\frac{5}{8}$	5.939	2 7-16
15-16	2.945	.6903	.8308	2 $\frac{7}{8}$	9	6.491	2 9-16

Dia. in.	Cir. in.	Area in	Side of	Dia. in	Cir. in	Area in	Area in
inch.	inch	sq. inch.	= sq.	inch.	ft. in.	sq. inch.	sq. ft.
3 in	9 $\frac{3}{8}$	7.068	2 $\frac{3}{8}$	10 in.	2 7 $\frac{3}{8}$	78.540	.5497
3 $\frac{1}{8}$	9 $\frac{3}{4}$	7.669	2 $\frac{3}{4}$	10 $\frac{1}{8}$	2 7 $\frac{3}{4}$	80.515	.5636
3 $\frac{1}{4}$	10 $\frac{1}{4}$	8.295	2 $\frac{7}{8}$	10 $\frac{1}{4}$	2 8 $\frac{1}{8}$	82.516	.5776
3 $\frac{3}{8}$	10 $\frac{3}{8}$	8.946	3 in.	10 $\frac{3}{8}$	2 8 $\frac{1}{4}$	84.540	.5917
3 $\frac{1}{2}$	11	9.621	3 $\frac{1}{8}$	10 $\frac{1}{2}$	2 8 $\frac{3}{8}$	86.590	.6061
3 $\frac{5}{8}$	11 $\frac{3}{8}$	10.320	3 $\frac{1}{4}$	10 $\frac{5}{8}$	2 9 $\frac{1}{8}$	88.664	.6206
3 $\frac{3}{4}$	11 $\frac{3}{4}$	11.044	3 $\frac{3}{4}$	10 $\frac{3}{4}$	2 9 $\frac{3}{8}$	90.762	.6353
3 $\frac{7}{8}$	12 $\frac{1}{8}$	11.793	3 7-16	10 $\frac{7}{8}$	2 10 $\frac{1}{8}$	92.855	.6499

Dia. in	Cir. in	Area in	Area in	11 in.	2	10 $\frac{1}{2}$	95.033	.6652	
inch.	ft.	sq. inch.	sq. ft.	11 $\frac{1}{8}$	2	10 $\frac{3}{8}$	97.205	.6874	
4 in.	1	0 $\frac{1}{2}$	12.566	.0879	11 $\frac{1}{4}$	2	11 $\frac{1}{4}$	99.402	.6958
4 $\frac{1}{8}$	1	0 $\frac{5}{8}$	13.364	.0935	11 $\frac{3}{8}$	2	11 $\frac{3}{8}$	101.623	.7143
4 $\frac{1}{4}$	1	1 $\frac{1}{8}$	14.186	.0993	11 $\frac{1}{2}$	3	0 $\frac{1}{8}$	103.869	.7290
4 $\frac{3}{8}$	1	1 $\frac{3}{8}$	15.033	.1052	11 $\frac{3}{4}$	3	0 $\frac{1}{4}$	106.139	.7429
4 $\frac{1}{2}$	1	1 $\frac{5}{8}$	15.904	.1113	11 $\frac{7}{8}$	3	0 $\frac{3}{8}$	108.434	.7590
4 $\frac{3}{4}$	1	2 $\frac{1}{2}$	16.800	.1176	11 $\frac{3}{4}$	3	0 $\frac{7}{8}$	110.753	.7752
4 $\frac{7}{8}$	1	2 $\frac{5}{8}$	17.720	.1240	12 in.	3	1 $\frac{1}{4}$	113.097	.7916
4 $\frac{7}{8}$	1	3 $\frac{1}{4}$	18.665	.1306	12 $\frac{1}{8}$	3	1 $\frac{1}{8}$	115.466	.8082

5 in.	1	3 $\frac{3}{8}$	19.635	.1374	12 $\frac{1}{4}$	3	2 $\frac{1}{2}$	117.859	.8250
5 $\frac{1}{8}$	1	4 $\frac{1}{8}$	20.629	.1444	12 $\frac{3}{8}$	3	2 $\frac{3}{8}$	120.276	.8419
5 $\frac{1}{4}$	1	4 $\frac{1}{2}$	21.647	.1515	12 $\frac{1}{2}$	3	3 $\frac{1}{4}$	122.718	.8590
5 $\frac{3}{8}$	1	4 $\frac{3}{4}$	22.690	.1588	12 $\frac{3}{4}$	3	3 $\frac{3}{8}$	125.185	.8762
5 $\frac{1}{2}$	1	5 $\frac{1}{4}$	23.758	.1663	12 $\frac{7}{8}$	3	4	127.676	.8937
5 $\frac{3}{4}$	1	5 $\frac{3}{4}$	24.850	.1739	13 in.	3	4 $\frac{3}{8}$	130.192	.9113
5 $\frac{7}{8}$	1	6	25.967	.1817	13 $\frac{1}{8}$	3	5 $\frac{1}{4}$	132.732	.9291
5 $\frac{7}{8}$	1	6 $\frac{1}{8}$	27.108	.1897	13 $\frac{1}{4}$	3	5 $\frac{3}{8}$	135.297	.9470

6 in.	1	6 $\frac{3}{4}$	28.274	.1979	13 $\frac{3}{8}$	3	6	137.886	.9642
6 $\frac{1}{8}$	1	7 $\frac{1}{4}$	29.464	.2062	13 $\frac{1}{2}$	3	6 $\frac{1}{8}$	140.500	.9835
6 $\frac{1}{4}$	1	7 $\frac{3}{8}$	30.679	.2147	13 $\frac{3}{4}$	3	6 $\frac{3}{4}$	143.139	1.0019
6 $\frac{3}{8}$	1	8	31.919	.2234	13 $\frac{7}{8}$	3	7 $\frac{1}{8}$	145.802	1.0206
6 $\frac{1}{2}$	1	8 $\frac{3}{8}$	33.183	.2322	14 in.	3	7 $\frac{3}{8}$	148.489	1.0294
6 $\frac{3}{4}$	1	8 $\frac{3}{4}$	34.471	.2412	14 $\frac{1}{8}$	3	7 $\frac{1}{2}$	151.201	1.0584
6 $\frac{7}{8}$	1	9 $\frac{1}{8}$	35.784	.2504	14 $\frac{1}{4}$	3	7 $\frac{3}{4}$	153.938	1.0775
6 $\frac{7}{8}$	1	9 $\frac{1}{2}$	37.122	.2598	14 $\frac{3}{8}$	3	8 $\frac{1}{8}$	156.699	1.0968

7 in.	1	10	38.484	.2693	14 $\frac{1}{2}$	3	8 $\frac{3}{8}$	159.485	1.1193
7 $\frac{1}{8}$	1	10 $\frac{3}{8}$	39.871	.2791	14 $\frac{3}{4}$	3	9 $\frac{1}{8}$	162.295	1.1360
7 $\frac{1}{4}$	1	10 $\frac{3}{4}$	41.282	.2889	14 $\frac{7}{8}$	3	9 $\frac{3}{8}$	165.130	1.1569
7 $\frac{3}{8}$	1	11 $\frac{1}{8}$	42.718	.2990	15 in.	3	9 $\frac{1}{2}$	167.989	1.1749
7 $\frac{1}{2}$	1	11 $\frac{1}{4}$	44.178	.3092	15 $\frac{1}{8}$	3	10 $\frac{1}{8}$	170.873	1.1961
7 $\frac{3}{4}$	1	11 $\frac{3}{8}$	45.663	.3196	15 $\frac{1}{4}$	3	10 $\frac{3}{8}$	173.782	1.2164
7 $\frac{5}{8}$	2	0 $\frac{3}{8}$	47.173	.3299	15 $\frac{3}{8}$	3	11 $\frac{1}{8}$	176.715	1.2370
7 $\frac{7}{8}$	2	0 $\frac{3}{4}$	47.707	.3409	15 $\frac{1}{2}$	3	11 $\frac{3}{8}$	179.672	1.2577

8 in.	2	1 $\frac{1}{2}$	50.265	.3518	15 $\frac{3}{4}$	3	11 $\frac{3}{4}$	182.654	1.2785
8 $\frac{1}{8}$	2	1 $\frac{5}{8}$	51.848	.3629	15 $\frac{7}{8}$	4	0 $\frac{1}{4}$	185.661	1.2996
8 $\frac{1}{4}$	2	1 $\frac{7}{8}$	53.456	.3741	16 in.	4	0 $\frac{3}{8}$	188.692	1.3208
8 $\frac{3}{8}$	2	2 $\frac{1}{4}$	55.088	.3856	16 $\frac{1}{8}$	4	1	191.748	1.3422
8 $\frac{1}{2}$	2	2 $\frac{3}{8}$	56.745	.3972	16 $\frac{1}{4}$	4	1 $\frac{1}{2}$	194.828	1.3637
8 $\frac{3}{8}$	2	3	58.426	.4089	16 $\frac{3}{8}$	4	1 $\frac{3}{4}$	197.933	1.3855
8 $\frac{1}{2}$	2	3 $\frac{1}{8}$	60.132	.4209	16 $\frac{1}{2}$	4	2 $\frac{1}{4}$	201.062	1.4074
8 $\frac{3}{4}$	2	3 $\frac{3}{8}$	61.862	.4330	16 $\frac{3}{4}$	4	2 $\frac{3}{8}$	204.216	1.4295

9 in.	2	4 $\frac{1}{4}$	63.617	.4453	16 $\frac{7}{8}$	4	3	207.394	1.4517
9 $\frac{1}{8}$	2	4 $\frac{3}{8}$	65.396	.4517	17 in.	4	3 $\frac{1}{8}$	210.597	1.4741
9 $\frac{1}{4}$	2	5	67.200	.4704	17 $\frac{1}{8}$	4	3 $\frac{3}{8}$	213.825	1.4967
9 $\frac{3}{8}$	2	5 $\frac{1}{8}$	69.029	.4832	17 $\frac{1}{4}$	4	4 $\frac{1}{4}$	217.077	1.5195
9 $\frac{1}{2}$	2	5 $\frac{3}{8}$	70.882	.4961	17 $\frac{3}{8}$	4	4 $\frac{3}{8}$	220.353	1.5424
9 $\frac{3}{8}$	2	6 $\frac{1}{4}$	72.759	.5093	17 $\frac{1}{2}$	4	5	223.654	1.5655
9 $\frac{5}{8}$	2	6 $\frac{3}{8}$	74.662	.5226					
9 $\frac{7}{8}$	2	7	76.588	.5361					

Dia. in incli.	Cir. in ft. in.	Area in sq. inch.	Area in sq. ft.	Dia. in ft. in.	Cir. in ft. in.	Area in sq. inch.	Area in sq. ft.
17 in.	4 5 $\frac{3}{8}$	226.980	1.5888	2 0	6 3 $\frac{3}{8}$	452.290	3.1418
17 $\frac{1}{8}$	4 5 $\frac{3}{4}$	230.330	1.6123	2 2	6 4 $\frac{1}{8}$	461.864	3.2075
17 $\frac{1}{4}$	4 6 $\frac{1}{8}$	233.705	1.6359	2 2	6 4 $\frac{7}{8}$	471.436	3.2731
17 $\frac{3}{8}$	4 6 $\frac{1}{2}$	237.104	1.6597	2 2	6 5 $\frac{1}{4}$	481.106	3.3410
17 $\frac{1}{2}$	4 6 $\frac{3}{4}$	240.528	1.6836	2 2	6 6 $\frac{1}{2}$	490.875	3.4081
17 $\frac{3}{4}$	4 7 $\frac{1}{8}$	243.977	1.7078	2 2	6 7 $\frac{1}{4}$	500.741	3.4775
17 $\frac{7}{8}$	4 7 $\frac{3}{8}$	247.450	1.7321	2 2	6 8 $\frac{1}{8}$	510.706	3.5468
17 $\frac{7}{8}$	4 8 $\frac{1}{8}$	250.947	1.7566	2 2	6 8 $\frac{3}{8}$	520.769	3.6101
18 in.	4 8 $\frac{1}{2}$	254.469	1.7812	2 2	6 9 $\frac{1}{8}$	530.930	3.6870
18 $\frac{1}{8}$	4 8 $\frac{3}{4}$	258.016	1.8061	2 2	6 10 $\frac{1}{8}$	541.189	3.7583
18 $\frac{1}{4}$	4 9 $\frac{1}{4}$	261.587	1.8311	2 2	6 11 $\frac{1}{4}$	551.547	3.8302
18 $\frac{3}{8}$	4 9 $\frac{3}{4}$	265.182	1.8562	2 2	6 12 $\frac{1}{4}$	562.002	3.9042
18 $\frac{1}{2}$	4 10 $\frac{1}{8}$	268.803	1.8816	2 2	7 0	572.556	3.9761
18 $\frac{3}{4}$	4 10 $\frac{3}{8}$	272.447	1.9071	2 2	7 0 $\frac{1}{4}$	583.208	4.0500
18 $\frac{7}{8}$	4 10 $\frac{7}{8}$	276.117	1.9328	2 2	7 0 $\frac{3}{4}$	593.958	4.1241
18 $\frac{7}{8}$	4 11 $\frac{1}{4}$	279.811	1.9586	2 2	7 1 $\frac{1}{8}$	604.807	4.2000
19 in.	4 11 $\frac{3}{8}$	283.529	1.9847	2 2	7 1 $\frac{3}{8}$	615.753	4.2760
19 $\frac{1}{8}$	5 0	287.272	1.9941	2 2	7 1 $\frac{7}{8}$	626.798	4.3521
19 $\frac{1}{4}$	5 0 $\frac{1}{4}$	291.039	2.0371	2 2	7 2 $\frac{1}{8}$	637.941	4.4302
19 $\frac{3}{8}$	5 0 $\frac{3}{8}$	294.831	2.0637	2 2	7 2 $\frac{3}{8}$	649.182	4.5083
19 $\frac{1}{2}$	5 0 $\frac{1}{2}$	298.648	2.0904	2 2	7 2 $\frac{7}{8}$	660.521	4.5861
19 $\frac{3}{4}$	5 1 $\frac{1}{8}$	302.489	2.1172	2 2	7 3 $\frac{1}{8}$	671.958	4.6665
19 $\frac{7}{8}$	5 1 $\frac{3}{8}$	306.355	2.1443	2 2	7 3 $\frac{3}{8}$	683.494	4.7467
19 $\frac{7}{8}$	5 1 $\frac{7}{8}$	310.245	2.1716	2 2	7 3 $\frac{7}{8}$	695.128	4.8274
20 in.	5 2 $\frac{1}{8}$	314.160	2.1990	2 2	7 4 $\frac{1}{8}$	706.860	4.9081
20 $\frac{1}{8}$	5 2 $\frac{3}{8}$	318.099	2.2265	2 2	7 4 $\frac{3}{8}$	718.690	4.9901
20 $\frac{1}{4}$	5 2 $\frac{5}{8}$	322.063	2.2543	2 2	7 4 $\frac{7}{8}$	730.618	5.0731
20 $\frac{3}{8}$	5 3	326.051	2.2822	2 2	7 5 $\frac{1}{8}$	742.644	5.1573
20 $\frac{1}{2}$	5 3 $\frac{1}{8}$	330.064	2.3103	2 2	7 5 $\frac{3}{8}$	754.769	5.2278
20 $\frac{3}{4}$	5 3 $\frac{3}{8}$	334.101	2.3386	2 2	7 5 $\frac{7}{8}$	766.992	5.3264
20 $\frac{7}{8}$	5 3 $\frac{7}{8}$	338.163	2.3670	2 2	7 6 $\frac{1}{8}$	779.313	5.4112
20 $\frac{7}{8}$	5 4	342.250	2.3956	2 2	7 6 $\frac{3}{8}$	791.732	5.4982
21 in.	5 4 $\frac{1}{8}$	346.361	2.4244	2 2	7 6 $\frac{7}{8}$	804.249	5.5850
21 $\frac{1}{8}$	5 4 $\frac{3}{8}$	350.497	2.4533	2 2	7 7 $\frac{1}{8}$	816.865	5.6729
21 $\frac{1}{4}$	5 4 $\frac{5}{8}$	354.657	2.4824	2 2	7 7 $\frac{3}{8}$	829.578	5.7601
21 $\frac{3}{8}$	5 4 $\frac{7}{8}$	358.841	2.5117	2 2	7 7 $\frac{7}{8}$	842.390	5.8491
21 $\frac{1}{2}$	5 5	363.051	2.5412	2 2	7 8	855.300	5.9398
21 $\frac{3}{4}$	5 5 $\frac{1}{8}$	367.284	2.5708	2 2	7 8 $\frac{1}{4}$	868.308	6.0291
21 $\frac{7}{8}$	5 5 $\frac{3}{8}$	371.543	2.6007	2 2	7 8 $\frac{3}{8}$	881.415	6.1201
21 $\frac{7}{8}$	5 5 $\frac{7}{8}$	375.826	2.6306	2 2	7 8 $\frac{7}{8}$	894.619	6.2129
22 in.	5 5 $\frac{7}{8}$	380.133	2.6608	2 2	7 9	907.922	6.3051
22 $\frac{1}{8}$	5 6	384.465	2.6691	2 2	7 9 $\frac{1}{8}$	921.323	6.3981
22 $\frac{1}{4}$	5 6 $\frac{1}{4}$	388.822	2.7016	2 2	7 9 $\frac{3}{8}$	934.822	6.4911
22 $\frac{3}{8}$	5 6 $\frac{3}{8}$	393.203	2.7224	2 2	7 9 $\frac{7}{8}$	948.419	6.5863
22 $\frac{1}{2}$	5 6 $\frac{5}{8}$	397.608	2.7632	2 2	8 0	962.115	6.6815
22 $\frac{3}{4}$	5 6 $\frac{7}{8}$	402.038	2.7980	2 2	8 0 $\frac{1}{4}$	975.908	6.7772
22 $\frac{7}{8}$	5 7	406.493	2.8054	2 2	8 0 $\frac{3}{8}$	989.800	6.8738
22 $\frac{7}{8}$	5 7 $\frac{1}{8}$	410.972	2.8658	2 2	8 0 $\frac{7}{8}$	1003.79	6.9701
23 in.	6 0 $\frac{1}{8}$	415.476	2.8903	3 0	9 5	1017.87	7.0688
23 $\frac{1}{8}$	6 0 $\frac{3}{8}$	420.004	2.9100	3 0	9 5 $\frac{1}{8}$	1032.06	7.1671
23 $\frac{1}{4}$	6 0 $\frac{5}{8}$	424.557	2.9518	3 0	9 5 $\frac{3}{8}$	1046.35	7.2664
23 $\frac{3}{8}$	6 1 $\frac{1}{8}$	429.135	2.9937	3 0	9 5 $\frac{7}{8}$	1060.73	7.3662
23 $\frac{1}{2}$	6 1 $\frac{3}{8}$	433.737	3.0129	3 0	9 6 $\frac{1}{8}$	1075.21	7.4661
23 $\frac{3}{4}$	6 1 $\frac{5}{8}$	438.363	3.0261	3 0	9 6 $\frac{3}{8}$	1089.79	7.5671
23 $\frac{7}{8}$	6 1 $\frac{7}{8}$	443.014	3.0722	3 0	9 6 $\frac{7}{8}$	1104.46	7.6691
23 $\frac{7}{8}$	6 2	447.690	3.1081	3 0	9 7	1119.24	7.7791

D'a. in ft. in.	Cir. in ft. in.	Area in sq. inch.	Area in sq. ft.	Dia. in ft. in.	Cir. in ft. in.	Area in sq. inch.	Area in sq. ft.
3 2	9 11 $\frac{3}{8}$	1134.12	7.8681	4 4	13 7 $\frac{3}{8}$	2123.72	14.748
3 2 $\frac{1}{4}$	10 0 $\frac{1}{8}$	1149.09	7.9791	4 4 $\frac{1}{4}$	13 8 $\frac{1}{8}$	2144.19	14.890
3 2 $\frac{1}{2}$	10 0 $\frac{1}{4}$	1164.16	8.0846	4 4 $\frac{1}{2}$	13 8 $\frac{3}{8}$	2164.75	15.033
3 2 $\frac{3}{4}$	10 1 $\frac{1}{8}$	1179.32	8.1891	4 4 $\frac{3}{4}$	13 9 $\frac{1}{4}$	2185.42	15.176
3 3	10 2 $\frac{1}{2}$	1194.59	8.2951	4 5	13 10 $\frac{1}{2}$	2206.18	15.320
3 3 $\frac{1}{4}$	10 3 $\frac{1}{4}$	1209.95	8.4026	4 5 $\frac{1}{4}$	13 11 $\frac{1}{4}$	2227.05	15.465
3 3 $\frac{1}{2}$	10 4	1225.42	8.5091	4 5 $\frac{1}{2}$	14 0	2248.01	15.611
3 3 $\frac{3}{4}$	10 4 $\frac{1}{2}$	1240.98	8.6171	4 5 $\frac{3}{4}$	14 0 $\frac{1}{8}$	2269.06	15.757
3 4	10 5 $\frac{1}{4}$	1256.64	8.7269	4 6	14 1 $\frac{1}{8}$	2290.22	15.904
3 4 $\frac{1}{4}$	10 6 $\frac{1}{8}$	1272.39	8.8361	4 6 $\frac{1}{4}$	14 2 $\frac{1}{8}$	2311.48	16.051
3 4 $\frac{1}{2}$	10 7 $\frac{1}{4}$	1288.25	8.9462	4 6 $\frac{1}{2}$	14 3 $\frac{1}{4}$	2332.83	16.200
3 4 $\frac{3}{4}$	10 8	1304.20	9.0561	4 6 $\frac{3}{4}$	14 4	2354.28	16.349
3 5	10 8 $\frac{3}{4}$	1320.25	9.1686	4 7	14 4 $\frac{1}{2}$	2375.83	16.498
3 5 $\frac{1}{4}$	10 9 $\frac{1}{2}$	1336.40	9.2112	4 7 $\frac{1}{4}$	14 5 $\frac{1}{4}$	2397.48	16.649
3 5 $\frac{1}{2}$	10 10 $\frac{1}{8}$	1352.65	9.3936	4 7 $\frac{1}{2}$	14 6 $\frac{1}{2}$	2419.22	16.800
3 5 $\frac{3}{4}$	10 11 $\frac{1}{8}$	1369.00	9.5061	4 7 $\frac{3}{4}$	14 7 $\frac{1}{8}$	2441.07	16.951
3 6	10 11 $\frac{1}{4}$	1385.44	9.6212	4 8	14 7 $\frac{1}{2}$	2463.01	17.104
3 6 $\frac{1}{4}$	11 0 $\frac{3}{4}$	1401.98	9.7364	4 8 $\frac{1}{4}$	14 8 $\frac{1}{8}$	2485.05	17.256
3 6 $\frac{1}{2}$	11 1 $\frac{1}{2}$	1418.62	9.8518	4 8 $\frac{1}{2}$	14 9 $\frac{1}{2}$	2507.19	17.411
3 6 $\frac{3}{4}$	11 2 $\frac{1}{4}$	1435.36	9.9671	4 8 $\frac{3}{4}$	14 10 $\frac{1}{4}$	2529.42	17.565
3 7	11 3	1452.20	10.084	4 9	14 11	2551.76	17.720
3 7 $\frac{1}{4}$	11 3 $\frac{3}{8}$	1469.14	10.202	4 9 $\frac{1}{4}$	14 11 $\frac{1}{8}$	2574.19	17.876
3 7 $\frac{1}{2}$	11 4 $\frac{1}{8}$	1486.17	10.320	4 9 $\frac{1}{2}$	15 0 $\frac{1}{8}$	2596.72	18.033
3 7 $\frac{3}{4}$	11 5 $\frac{1}{8}$	1503.30	10.439	4 9 $\frac{3}{4}$	15 1 $\frac{1}{8}$	2619.35	18.189
3 8	11 6 $\frac{1}{4}$	1530.53	10.559	4 10	15 2 $\frac{1}{4}$	2642.08	18.347
3 8 $\frac{1}{4}$	11 7	1537.86	10.679	4 10 $\frac{1}{4}$	15 2 $\frac{1}{2}$	2664.91	18.506
3 8 $\frac{1}{2}$	11 7 $\frac{1}{4}$	1555.28	10.800	4 10 $\frac{1}{2}$	15 3 $\frac{1}{4}$	2687.83	18.665
3 8 $\frac{3}{4}$	11 8 $\frac{1}{2}$	1572.81	10.922	4 10 $\frac{3}{4}$	15 4 $\frac{1}{2}$	2710.85	18.825
3 9	11 9 $\frac{1}{8}$	1590.43	11.044	4 11	15 5 $\frac{1}{4}$	2733.97	18.985
3 9 $\frac{1}{4}$	11 10 $\frac{1}{8}$	1608.15	11.167	4 11 $\frac{1}{4}$	15 6 $\frac{1}{4}$	2757.19	19.147
3 9 $\frac{1}{2}$	11 10 $\frac{1}{4}$	1625.97	11.291	4 11 $\frac{1}{2}$	15 6 $\frac{1}{2}$	2780.51	19.309
3 9 $\frac{3}{4}$	11 11 $\frac{1}{4}$	1643.89	11.415	4 11 $\frac{3}{4}$	15 7 $\frac{1}{4}$	2803.92	19.471
3 10	12 0 $\frac{1}{2}$	1661.90	11.534	5 0	15 8 $\frac{1}{2}$	2827.44	19.635
3 10 $\frac{1}{4}$	12 1 $\frac{1}{4}$	1680.02	11.666	5 0 $\frac{1}{4}$	15 9 $\frac{1}{4}$	2851.05	19.798
3 10 $\frac{1}{2}$	12 2	1698.23	11.793	5 0 $\frac{1}{2}$	15 10	2874.76	19.963
3 10 $\frac{3}{4}$	12 2 $\frac{1}{4}$	1716.54	11.920	5 0 $\frac{3}{4}$	15 10 $\frac{1}{4}$	2898.56	20.128
3 11	12 3 $\frac{1}{8}$	1734.94	12.048	5 1	15 11 $\frac{1}{8}$	2922.47	20.294
3 11 $\frac{1}{4}$	12 4 $\frac{1}{8}$	1753.45	12.176	5 1 $\frac{1}{4}$	16 0 $\frac{1}{8}$	2946.47	20.461
3 11 $\frac{1}{2}$	12 5 $\frac{1}{4}$	1772.05	12.305	5 1 $\frac{1}{2}$	16 1 $\frac{1}{4}$	2970.57	20.629
3 11 $\frac{3}{4}$	12 6	1790.76	12.435	5 1 $\frac{3}{4}$	16 1 $\frac{1}{2}$	2994.77	20.797
4 0	12 6 $\frac{3}{4}$	1809.56	12.566	5 2	16 2 $\frac{1}{4}$	3019.07	20.965
4 0 $\frac{1}{4}$	12 7 $\frac{1}{4}$	1828.46	12.697	5 2 $\frac{1}{4}$	16 3 $\frac{1}{8}$	3043.47	21.135
4 0 $\frac{1}{2}$	12 8 $\frac{1}{8}$	1847.45	12.829	5 2 $\frac{1}{2}$	16 4 $\frac{1}{4}$	3067.96	21.305
4 0 $\frac{3}{4}$	12 9 $\frac{1}{8}$	1866.55	12.962	5 2 $\frac{3}{4}$	16 5 $\frac{1}{8}$	3092.56	21.476
4 1	12 9 $\frac{1}{4}$	1885.74	13.095	5 3	16 5 $\frac{1}{4}$	3117.25	21.647
4 1 $\frac{1}{4}$	12 10 $\frac{1}{8}$	1905.03	13.229	5 3 $\frac{1}{4}$	16 6 $\frac{1}{4}$	3142.04	21.819
4 1 $\frac{1}{2}$	12 11 $\frac{1}{4}$	1924.42	13.364	5 3 $\frac{1}{2}$	16 7 $\frac{1}{2}$	3166.92	21.992
4 1 $\frac{3}{4}$	13 0 $\frac{1}{4}$	1943.91	13.499	5 3 $\frac{3}{4}$	16 8 $\frac{1}{4}$	3191.91	22.166
4 2	13 1	1963.50	13.635	5 4	16 9	3216.99	22.333
4 2 $\frac{1}{4}$	13 1 $\frac{1}{4}$	1983.18	13.772	5 4 $\frac{1}{4}$	16 9 $\frac{3}{4}$	3242.17	22.515
4 2 $\frac{1}{2}$	13 2 $\frac{1}{2}$	2002.96	13.909	5 4 $\frac{1}{2}$	16 10 $\frac{1}{8}$	3267.46	22.621
4 2 $\frac{3}{4}$	13 3 $\frac{1}{8}$	2022.84	14.047	5 4 $\frac{3}{4}$	16 11 $\frac{1}{8}$	3292.83	22.866
4 3	13 4 $\frac{1}{4}$	2042.82	14.186	5 5	17 0 $\frac{1}{8}$	3318.31	23.043
4 3 $\frac{1}{4}$	13 5	2062.90	14.325	5 5 $\frac{1}{4}$	17 0 $\frac{1}{4}$	3343.88	23.221
4 3 $\frac{1}{2}$	13 5 $\frac{1}{2}$	2083.07	14.465	5 5 $\frac{1}{2}$	17 1 $\frac{1}{4}$	3369.56	23.330
4 3 $\frac{3}{4}$	13 6 $\frac{1}{2}$	2103.35	14.606	5 5 $\frac{3}{4}$	17 2 $\frac{1}{2}$	3395.33	23.578

Dia. in ft.	in.	Cir. in ft.	in.	Area in sq. inch.	Area in sq. ft.	Dia. in ft.	in.	Cir. in ft.	in.	Area in sq. inch.	Area in sq. ft.
5	6	17	3 $\frac{3}{4}$	3421.20	23.758	6	4	19	10 $\frac{3}{4}$	4536.47	31.503
5	6 $\frac{1}{4}$	17	4 $\frac{1}{4}$	3447.16	23.938	6	4 $\frac{1}{2}$	19	11 $\frac{1}{2}$	4566.36	31.710
5	6 $\frac{1}{2}$	17	4 $\frac{3}{4}$	3473.23	24.119	6	4 $\frac{3}{4}$	20	0 $\frac{1}{4}$	4596.35	31.915
5	6 $\frac{3}{4}$	17	5 $\frac{1}{4}$	3499.39	24.301	6	4 $\frac{3}{4}$	20	1 $\frac{1}{8}$	4626.44	32.114
5	7	17	6 $\frac{1}{2}$	3525.26	24.483	6	5	20	1 $\frac{1}{2}$	4656.63	32.337
5	7 $\frac{1}{4}$	17	7 $\frac{1}{4}$	3552.01	24.666	6	5 $\frac{1}{4}$	20	2 $\frac{1}{8}$	4686.92	32.548
5	7 $\frac{1}{2}$	17	8	3578.47	24.850	6	5 $\frac{1}{2}$	20	3 $\frac{1}{4}$	4717.30	32.759
5	7 $\frac{3}{4}$	17	8 $\frac{3}{4}$	3605.03	25.034	6	5 $\frac{3}{4}$	20	4 $\frac{1}{4}$	4747.79	32.970
5	8	17	9 $\frac{1}{4}$	3631.68	25.220	6	6	20	5	4778.37	33.183
5	8 $\frac{1}{4}$	17	10 $\frac{1}{4}$	3658.44	25.405	6	6 $\frac{1}{4}$	20	5 $\frac{3}{4}$	4809.05	33.396
5	8 $\frac{1}{2}$	17	11 $\frac{1}{4}$	3685.29	25.592	6	6 $\frac{1}{2}$	20	6 $\frac{1}{2}$	4839.83	33.619
5	8 $\frac{3}{4}$	17	11 $\frac{3}{4}$	3712.24	25.779	6	6 $\frac{3}{4}$	20	7 $\frac{1}{8}$	4870.70	33.824
5	9	18	0 $\frac{3}{4}$	3739.28	25.964	6	7	20	8 $\frac{1}{4}$	4901.68	34.039
5	9 $\frac{1}{4}$	18	1 $\frac{1}{2}$	3766.43	26.155	6	7 $\frac{1}{4}$	20	8 $\frac{3}{4}$	4932.75	34.255
5	9 $\frac{1}{2}$	18	2 $\frac{1}{4}$	3793.67	26.344	6	7 $\frac{1}{2}$	20	9 $\frac{1}{4}$	4963.92	34.471
5	9 $\frac{3}{4}$	18	3 $\frac{1}{4}$	3821.02	26.534	6	7 $\frac{3}{4}$	20	10 $\frac{1}{2}$	4995.19	34.688
5	10	18	3 $\frac{3}{4}$	3848.46	26.725	6	8	20	11 $\frac{1}{4}$	5026.26	34.906
5	10 $\frac{1}{4}$	18	4 $\frac{3}{8}$	3875.99	26.916	6	8 $\frac{1}{4}$	21	0 $\frac{1}{8}$	5058.02	35.125
5	10 $\frac{1}{2}$	18	5 $\frac{1}{2}$	3903.63	27.108	6	8 $\frac{1}{2}$	21	0 $\frac{7}{8}$	5089.58	35.344
5	10 $\frac{3}{4}$	18	6 $\frac{1}{4}$	3931.36	27.301	6	8 $\frac{3}{4}$	21	1 $\frac{1}{8}$	5121.24	35.564
5	11	18	7	3959.20	27.494	6	9	21	2 $\frac{3}{8}$	5153.00	35.784
5	11 $\frac{1}{4}$	18	7 $\frac{3}{4}$	3987.13	27.688	6	9 $\frac{1}{4}$	21	3 $\frac{1}{4}$	5184.86	36.006
5	11 $\frac{1}{2}$	18	8 $\frac{5}{8}$	4015.16	27.883	6	9 $\frac{1}{2}$	21	4	5216.82	36.227
5	11 $\frac{3}{4}$	18	9 $\frac{1}{8}$	4043.28	28.078	6	9 $\frac{3}{4}$	21	4 $\frac{3}{4}$	5248.87	36.450
6	0	18	10 $\frac{1}{4}$	4071.51	28.274	6	10	21	5 $\frac{1}{2}$	5281.02	36.674
6	0 $\frac{1}{4}$	18	10 $\frac{3}{8}$	4099.83	28.471	6	10 $\frac{1}{4}$	21	6 $\frac{1}{8}$	5313.27	36.897
6	0 $\frac{1}{2}$	18	11 $\frac{1}{4}$	4128.25	28.663	6	10 $\frac{1}{2}$	21	7 $\frac{1}{4}$	5345.62	37.122
6	0 $\frac{3}{4}$	19	0 $\frac{1}{2}$	4156.77	28.866	6	10 $\frac{3}{4}$	21	7 $\frac{3}{4}$	5378.07	37.347
6	1	19	1 $\frac{1}{4}$	4185.39	29.064	6	11	21	8 $\frac{3}{4}$	5410.62	37.573
6	1 $\frac{1}{4}$	19	2 $\frac{1}{4}$	4214.11	29.264	6	11 $\frac{1}{4}$	21	9 $\frac{1}{4}$	5443.26	37.700
6	1 $\frac{1}{2}$	19	2 $\frac{3}{8}$	4242.92	29.466	6	11 $\frac{1}{2}$	21	10 $\frac{1}{4}$	5476.00	38.027
6	1 $\frac{3}{4}$	19	3 $\frac{1}{8}$	4271.83	29.665	6	11 $\frac{3}{4}$	21	11	5508.84	38.256
6	2	19	4 $\frac{1}{2}$	4300.85	29.867						
6	2 $\frac{1}{4}$	19	5 $\frac{1}{4}$	4329.95	30.069						
6	2 $\frac{1}{2}$	19	6	4359.16	30.271						
6	2 $\frac{3}{4}$	19	6 $\frac{3}{4}$	4388.47	30.475						
6	3	19	7 $\frac{1}{8}$	4417.87	30.619						
6	3 $\frac{1}{4}$	19	8 $\frac{1}{4}$	4447.37	30.884						
6	3 $\frac{1}{2}$	19	9 $\frac{1}{4}$	4476.97	31.090						
6	3 $\frac{3}{4}$	19	9 $\frac{3}{4}$	4506.67	31.296						

Dia. in		Circum. in		Area in feet.	Dia. in		Circum. in		Area in feet.
ft.	in.	ft.	in.		ft.	in.	ft.	in.	
7	0	21	11 $\frac{7}{8}$	38.4846	11	0	34	6 $\frac{5}{8}$	95.0334
7	1	22	3	39.4060	11	1	34	9 $\frac{3}{4}$	96.4783
7	2	22	6 $\frac{1}{4}$	40.3388	11	2	35	0 $\frac{7}{8}$	97.9347
7	3	22	9 $\frac{1}{4}$	41.2825	11	3	35	4 $\frac{1}{4}$	99.4021
7	4	23	0 $\frac{3}{8}$	42.2367	11	4	35	7 $\frac{1}{4}$	100.8797
7	5	23	2 $\frac{1}{8}$	43.2022	11	5	35	10 $\frac{5}{8}$	102.3689
7	6	23	6 $\frac{3}{4}$	44.1787	11	6	36	1 $\frac{1}{2}$	103.8601
7	7	23	11	45.1656	11	7	36	4 $\frac{1}{2}$	105.3794
7	8	24	1 $\frac{1}{8}$	46.1638	11	8	36	7 $\frac{3}{4}$	106.9013
7	9	24	4 $\frac{1}{4}$	47.1730	11	9	36	10 $\frac{7}{8}$	108.4342
7	10	24	7 $\frac{1}{4}$	48.1926	11	10	37	2 $\frac{1}{4}$	109.9772
7	11	24	10 $\frac{3}{8}$	49.2236	11	11	37	5 $\frac{1}{4}$	111.5319
x	0	25	1 $\frac{1}{2}$	50.2656	12	0	37	8 $\frac{3}{8}$	113.0976
x	1	25	4 $\frac{5}{8}$	51.6178	12	1	37	11 $\frac{1}{2}$	114.6732
x	2	25	7 $\frac{3}{8}$	52.3816	12	2	38	2 $\frac{5}{8}$	116.2607
x	3	25	11	53.4562	12	3	38	5 $\frac{3}{4}$	117.8590
x	4	26	2 $\frac{1}{8}$	54.5412	12	4	38	8 $\frac{7}{8}$	119.4674
x	5	26	5 $\frac{1}{4}$	55.6377	12	5	39	0	121.0876
x	6	26	8 $\frac{3}{8}$	56.7451	12	6	39	3 $\frac{1}{4}$	122.7187
x	7	26	11 $\frac{1}{3}$	57.8628	12	7	39	6 $\frac{3}{8}$	124.3593
x	8	27	2 $\frac{3}{4}$	58.9920	12	8	39	9 $\frac{1}{2}$	126.0127
x	9	27	5 $\frac{3}{4}$	60.1321	12	9	40	0 $\frac{5}{8}$	127.6765
x	10	27	9	61.2826	12	10	40	3 $\frac{3}{4}$	129.3504
x	11	28	0 $\frac{1}{8}$	62.4445	12	11	40	6 $\frac{7}{8}$	131.0369
9	0	28	3 $\frac{1}{4}$	63.6174	13	0	40	10	132.7326
9	1	28	6 $\frac{3}{8}$	64.8006	13	1	41	1 $\frac{1}{8}$	134.4391
9	2	28	9 $\frac{1}{4}$	65.9951	13	2	41	4 $\frac{3}{8}$	136.1574
9	3	29	0 $\frac{5}{8}$	67.2007	13	3	41	7 $\frac{1}{2}$	137.8867
9	4	29	3 $\frac{3}{4}$	68.4166	13	4	41	10 $\frac{5}{8}$	139.6260
9	5	29	7	69.6440	13	5	42	1 $\frac{5}{8}$	141.3771
9	6	29	10 $\frac{1}{8}$	70.8823	13	6	42	4 $\frac{7}{8}$	143.1391
9	7	30	1 $\frac{1}{4}$	72.1309	13	7	42	8	144.9111
9	8	30	4 $\frac{3}{8}$	73.3910	13	8	42	11 $\frac{1}{8}$	146.6949
9	9	30	7 $\frac{1}{4}$	74.6620	13	9	43	2 $\frac{1}{4}$	148.4896
9	10	30	11 $\frac{5}{8}$	75.9433	13	10	43	5 $\frac{1}{2}$	150.2943
9	11	31	1 $\frac{3}{4}$	77.2362	13	11	43	8 $\frac{3}{8}$	152.1109
10	0	31	5	78.5400	14	0	43	11 $\frac{3}{4}$	153.9484
10	1	31	8 $\frac{1}{8}$	79.8540	14	1	44	2 $\frac{7}{8}$	155.7758
10	2	31	11 $\frac{1}{4}$	81.1795	14	2	44	6	157.6250
10	3	32	2 $\frac{3}{8}$	82.5190	14	3	44	9 $\frac{1}{8}$	159.4852
10	4	32	5 $\frac{1}{2}$	83.8627	14	4	45	0 $\frac{1}{4}$	161.3553
10	5	32	8 $\frac{5}{8}$	85.2211	14	5	45	3 $\frac{1}{2}$	163.2373
10	6	32	11 $\frac{3}{4}$	86.5903	14	6	45	6 $\frac{3}{8}$	165.1303
10	7	33	2 $\frac{7}{8}$	87.9697	14	7	45	9 $\frac{3}{4}$	167.0331
10	8	33	6 $\frac{1}{8}$	89.3668	14	8	46	0 $\frac{7}{8}$	168.9479
10	9	33	9 $\frac{1}{4}$	90.7627	14	9	46	4	170.8735
10	10	34	0 $\frac{3}{4}$	92.1749	14	10	46	7 $\frac{1}{8}$	172.8091
10	11	34	3 $\frac{1}{2}$	93.5986	14	11	46	11 $\frac{1}{4}$	174.7565

Dia. in		Circum. in		Area in feet.	Dia. in		Circum. in		Area in feet.
ft.	in.	ft.	in.		ft.	in.	ft.	in.	
15	0	47	1½	176.7150	17	0	53	4¼	226.9806
15	1	47	4¾	178.6832	17	1	53	8	229.2105
15	2	47	7¾	180.6624	17	2	53	11¼	231.4625
15	3	47	10¾	182.6545	17	3	54	2¼	233.7055
15	4	48	2½	184.6555	17	4	54	5¾	235.9682
15	5	48	5½	186.6684	17	5	54	8½	238.2430
15	6	48	8¼	188.6923	17	6	54	11¾	240.5287
15	7	48	11¾	190.7260	17	7	55	2¾	242.8241
15	8	49	2¾	192.7716	17	8	55	6	245.1316
15	9	49	5¾	194.8282	17	9	55	9¼	247.4500
15	10	49	8¾	196.8946	17	10	56	0¼	249.7781
15	11	50	0	198.9730	17	11	56	3½	252.1184
16	0	50	3¼	201.0624	18	0	56	6½	254.4696
16	1	50	6¼	203.1615	18	1	56	9¾	256.8303
16	2	50	9¾	205.2726	18	2	57	0¾	259.2033
16	3	51	0½	207.3946	18	3	57	4	261.5872
16	4	51	3¾	209.5264	18	4	57	7¼	263.9807
16	5	51	6½	211.6703	18	5	57	10¼	266.3864
16	6	51	10	213.8251	18	6	58	1¾	268.8031
16	7	52	1¼	215.9896	18	7	58	4½	271.2293
16	8	52	4¼	218.1662	18	8	58	7¾	273.6678
16	9	52	7¾	220.3537	18	9	58	10¾	276.1171
16	10	52	10¼	222.5510	18	10	59	2	278.5761
16	11	53	1½	224.7603	18	11	59	5½	281.0472

WEIGHT PER FOOT OF LEAD PIPE.

Inside diameter.	AAA		AA		A		B		C		D		E	
	Brooklyn.		Ex. strong.		Strong.		Medium.		Light.		Ex. light.		Fountain.	
Ins.	Lb.	Oz.	Lb.	Oz.	Lb.	Oz.	Lb.	Oz.	Lb.	Oz.	Lb.	Oz.	Lb.	Oz.
¾	1	12	1	8	1	4	1	0	0	12	0	10	1	7
7-16	1	0	0	13
½	3	0	2	0	1	12	1	4	1	0	0	12	0	9
5/8	3	8	2	12	2	8	2	0	1	8	1	0	0	12
¾	4	12	3	8	3	0	2	4	1	12	1	4	1	0
1	6	0	4	12	4	0	3	4	2	8	2	0	1	8
1¼	6	12	5	12	4	12	3	12	3	0	2	8	2	0
1½	8	8	7	8	6	8	5	0	4	4	3	8	3	0
1¾	10	0	8	8	7	0	6	0	5	0	4	0	0	0
2	11	12	9	0	8	0	7	0	6	0	4	12	.	.

Diam. Area.	Diam. Area.	Diam. Area.	Diam. Area.	Diam. Area.	Diam. Area.	Diam. Area.	Diam. Area.	Diam. Area.	Diam. Area.	Diam. Area.			
1 in.	7854	5 in.	19,635	9 in.	63,617	13 in.	132,732	17 in.	223,980	21 in.	346,361	25 in.	490,575
	4940		20,629		67,396		133,297		230,330		350,497		495,796
	1,2271		21,617		67,200		137,886		237,705		354,667		500,741
	1,4848		22,630		69,029		140,500		257,104		358,841		505,711
	1,7671		23,758		70,882		143,139		240,528		363,051		510,706
	2,0739		24,896		72,730		145,802		247,977		367,284		515,725
	2,4052		26,067		74,662		148,489		247,450		371,543		520,769
	2,7611		27,468		76,588		151,201		250,947		375,826		525,837
2 in.	3,1416	6 in.	28,274	10 in.	78,540	14 in.	153,938	18 in.	254,469	22 in.	380,133	26 in.	530,930
	3,5465		29,464		80,515		156,639		258,016		384,465		536,047
	3,9760		30,679		82,516		159,387		261,587		388,822		541,189
	4,4302		31,919		84,540		162,265		265,182		393,203		546,356
	4,9087		33,184		86,590		165,130		268,803		397,608		551,547
	5,4119		34,471		88,661		167,989		272,447		402,038		556,762
	5,9365		35,781		90,762		170,873		276,117		406,493		562,002
	6,4918		37,122		92,865		173,782		279,811		410,972		567,267
3 in.	7,0686	7 in.	38,484	11 in.	95,033	15 in.	176,715	19 in.	283,529	23 in.	415,476	27 in.	572,556
	7,6639		39,871		97,205		179,672		287,272		420,004		577,870
	8,2957		41,282		99,402		182,654		291,039		424,557		583,208
	8,9462		42,718		101,623		185,661		294,831		429,135		588,571
	9,6211		44,178		103,869		188,692		298,648		433,731		593,958
	10,320		45,665		106,139		191,748		302,489		438,363		599,370
	11,044		47,153		108,434		194,828		306,355		443,014		604,807
	11,793		48,767		110,753		197,933		310,245		447,689		610,263
4 in.	12,565	8 in.	50,265	12 in.	113,097	16 in.	201,162	20 in.	314,160	24 in.	452,390	28 in.	615,753
	13,364		51,848		115,466		204,216		318,099		457,115		621,263
	14,186		53,456		117,859		207,294		322,063		461,864		626,798
	15,033		55,088		120,276		210,397		326,051		466,638		632,357
	15,904		56,745		122,718		213,525		330,064		471,436		637,941
	16,800		58,426		125,184		216,677		334,101		476,259		643,584
	17,729		60,132		127,676		220,353		338,163		481,106		649,192
	18,665		61,862		130,192		223,654		342,250		485,978		654,839
20 in.	660,521	29 in.	666,227	29 in.	671,958	29 in.	677,714	29 in.	683,494	29 in.	689,128	30 in.	706,869

USE OF THE TABLE: To find the capacity of any cylindrical measure, from 1 inch diameter to 30 inches, take the inside diameter of the measure in inches, and multiply the area in the table which corresponds to the diameter by the depth in inches, and divide the products, if gills are required, by 7.2135; if pints, by 28.875; if quarts, by 57.75; and if gallons, by 231. If bushels are required (say in a tierce or barrel, after the mean diameter is obtained), multiply as above, and divide the product by 2150.42; the quotient is the number of bushels. Calling the diameters feet the areas are feet,—then, if a ship's water tank, steam boiler, etc., is $5\frac{1}{2}$, or any number of feet and parts of feet in diameter, find the area in the table which corresponds in inches, multiply it by the length in feet, and multiply this result by the number of gallons in a cubic foot (7.4805), and the product is the answer in gallons. In any case where there are more figures in the divisor than in the dividend, add ciphers.

CAPACITY OF CANS ONE INCH DEEP.

USE OF THE TABLE.

Required the contents of a vessel, diameter 6 7-10 inches, depth 10 inches.

By the table a vessel 1 inch deep and 6 7-10 inches diameter contains .15 (hundredths) gallon, then $15 \times 10 = 1.50$, or 1 gallon and 2 quarts.

Required the contents of a can, diameter 19 8-19 inches, depth 30 inches.

By the table a vessel 1 inch deep and 19 8-10 inches diameter contains 1 gallon and .33 (hundredths), then $1.33 \times 30 = 39.90$, or nearly 40 gallons.

Required the depth of a can whose diameter is 12 2-10 inches, to contain 16 gallons.

By the table a vessel 1 inch deep and 12 2-10 inches diameter contains .50 (hundredths) gallon, then $16 \div .50 = 32$ inches, the depth required.

Diam- eter.	$\frac{1}{10}$	$\frac{2}{10}$	$\frac{3}{10}$	$\frac{4}{10}$	$\frac{5}{10}$	$\frac{6}{10}$	$\frac{7}{10}$	$\frac{8}{10}$	$\frac{9}{10}$
3	.03	.03	.03	.03	.03	.04	.04	.04	.05
4	.05	.05	.05	.05	.06	.06	.07	.07	.08
5	.08	.08	.08	.08	.09	.10	.10	.11	.11
6	.12	.12	.12	.13	.13	.14	.14	.15	.16
7	.16	.17	.17	.18	.18	.19	.19	.20	.21
8	.21	.22	.22	.23	.23	.24	.25	.25	.26
9	.27	.28	.28	.29	.30	.30	.31	.31	.33
10	.34	.34	.35	.36	.36	.37	.38	.38	.40
11	.41	.41	.42	.43	.44	.44	.45	.46	.48
12	.48	.49	.50	.51	.52	.53	.53	.54	.56
13	.57	.58	.59	.60	.60	.61	.62	.63	.65
14	.66	.67	.68	.69	.70	.71	.72	.73	.75
15	.76	.77	.78	.79	.80	.81	.82	.83	.85
16	.87	.88	.89	.90	.91	.92	.93	.94	.97
17	.98	.99	1.005	1.017	1.028	1.040	1.051	1.063	1.086
18	1.101	1.113	1.125	1.138	1.150	1.162	1.170	1.187	1.211
19	1.227	1.240	1.253	1.266	1.279	1.292	1.304	1.317	1.343
20	1.360	1.373	1.385	1.400	1.414	1.428	1.441	1.455	1.482
21	1.499	1.513	1.527	1.542	1.556	1.570	1.585	1.600	1.630
22	1.645	1.660	1.675	1.696	1.705	1.720	1.735	1.750	1.780
23	1.798	1.814	1.830	1.845	1.861	1.876	1.892	1.908	1.940
24	1.958	1.974	1.991	2.007	2.023	2.040	2.056	2.072	2.105
25	2.125	2.142	2.159	2.176	2.193	2.210	2.227	2.244	2.280
26	2.298	2.316	2.333	2.351	2.369	2.386	2.404	2.422	2.460
27	2.478	2.496	2.515	2.533	2.552	2.570	2.588	2.607	2.643
28	2.665	2.684	2.703	2.722	2.741	2.764	2.780	2.800	2.836
29	2.859	2.879	2.898	2.918	2.938	2.958	2.977	2.997	3.036
30	3.060	3.080	3.100	3.121	3.141	3.162	3.182	3.202	3.245
31	3.267	3.288	3.309	3.330	3.351	3.372	3.393	3.414	3.457
32	3.481	3.503	3.524	3.543	3.568	3.590	3.612	3.633	3.589
33	3.702	3.725	3.747	3.773	3.795	3.814	3.837	3.860	3.904
34	3.930	3.953	3.976	4.003	4.022	4.046	4.070	4.092	4.140
35	4.165	4.188	4.212	4.236	4.260	4.284	4.307	4.331	4.380
36	4.406	4.430	4.455	4.483	4.503	4.528	4.553	4.577	4.626
37	4.654	4.679	4.704	4.730	4.755	4.780	4.805	4.834	4.880
38	4.909	4.935	4.961	4.987	5.012	5.038	5.064	5.090	5.142
39	5.171	5.197	5.224	5.250	5.277	5.304	5.330	5.357	5.383
40	5.440	5.467	5.491	5.521	5.548	5.576	5.603	5.630	5.684

RULES FOR CALCULATING CIRCUMFERENCES.

1st. Multiply the given diameter by 22, and divide the product by 7; or 2d, divide 22 by 7 and multiply the diameter by the quotient; or 3d, multiply the diameter by 3.1416; or 4th, multiply the diameter by 3 and add 1 inch for every 7 of the diameter, or about $\frac{1}{8}$ inch for every 1. For example: If the given diameter be 15 inches, by the first rule the circumference would be 47 $\frac{1}{7}$ inches; by the second, 47 $\frac{1}{7}$ inches; by the third, 47.1240 inches; by the fourth, 47 $\frac{1}{8}$ inches; by the table, 47 $\frac{1}{8}$ inches. It will be seen that the result is not just the same by the several rules, yet either is near enough for general use and practice.

WEIGHT OF WATER.

1	cubic inch.....	is equal to	.03617	pound.
12	cubic inches.....	is equal to	.434	pound.
1	cubic foot.....	is equal to	62.5	pounds.
1	cubic foot.....	is equal to	7.50	U. S. gallons.
1.8	cubic feet.....	is equal to	112.00	pounds.
35.84	cubic feet.....	is equal to	2240.00	pounds.
1	cylindrical inch.....	is equal to	.02842	pound.
12	cylindrical inches.....	is equal to	.341	pound.
1	cylindrical foot.....	is equal to	49.10	pounds.
1	cylindrical foot.....	is equal to	6.00	U. S. gallon
2.282	cylindrical feet.....	is equal to	112.00	pounds.
45.64	cylindrical feet.....	is equal to	2240.00	pounds.
13.43	United States gallons...	is equal to	112.00	pounds.
268.8	United States gallons...	is equal to	2240.00	pounds.

Center of pressure is at two-thirds depth from surface.

TO FIND NUMBER OF BARRELS IN CISTERNS.

The following table shows the number of barrels (31 $\frac{1}{2}$ gallons) contained in cisterns of various diameters, from 5 to 30 feet, and of depths ranging from 5 to 20 feet.

To use the table, find the required depth in the side column, and then follow along the line to the column which has the required diameter at the top. Thus, with a cistern 6 feet deep and 16 feet in diameter, we find 6 in the second line, and then follow along until column 16 is reached, when we find that the contents is 286.5 barrels.

NUMBER OF BARRELS ($31\frac{1}{2}$ GALLONS) IN CISTERNS AND
TANKS.

Diameter in feet.

Depth in feet.	5	6	7	8	9	10	11	12	13
5	23.3	33.6	45.7	59.7	75.5	93.2	112.8	134.3	157.6
6	28.0	40.3	54.8	71.7	90.6	111.9	135.4	161.1	189.1
7	32.7	47.0	64.0	83.6	105.7	130.6	158.0	188.0	220.6
8	37.3	53.7	73.1	95.5	120.9	149.2	180.5	214.8	252.1
9	42.0	60.4	82.2	107.4	136.0	167.9	203.1	241.7	283.7
10	46.7	67.1	91.4	119.4	151.1	186.5	225.7	268.6	315.2
11	51.3	73.9	100.5	131.3	166.2	205.1	248.2	295.4	346.7
12	56.0	80.6	109.7	143.2	181.3	223.8	270.8	322.3	378.2
13	60.7	87.3	118.8	155.2	196.4	242.4	293.4	349.1	409.7
14	65.3	94.0	127.9	167.1	211.5	261.1	315.9	376.0	441.3
15	70.0	100.7	137.1	179.0	226.6	289.8	338.5	402.8	472.8
16	74.7	107.4	146.2	191.0	241.7	298.4	361.1	429.7	504.3
17	79.3	114.1	155.4	202.9	256.8	317.0	383.6	456.6	535.8
18	84.0	120.9	164.5	214.8	272.0	335.7	406.2	483.4	567.3
19	88.7	127.6	173.6	226.8	287.0	354.3	428.8	510.3	598.0
20	93.3	134.3	182.8	238.7	302.1	373.0	451.3	537.1	630.4

Diameter in feet.

Depth in feet.	14	15	16	17	18	19	20	21	22
5	182.8	209.8	238.7	269.5	302.1	336.6	373.0	411.2	451.3
6	219.3	251.8	286.5	323.4	362.6	404.0	447.6	493.5	541.6
7	255.9	293.7	334.2	377.3	423.9	471.3	522.2	575.7	631.9
8	292.4	335.7	382.0	431.2	483.4	538.9	596.8	658.0	722.1
9	329.0	377.7	429.7	485.1	543.8	605.9	671.4	740.2	812.4
10	365.5	419.6	477.4	539.0	604.3	673.3	746.0	822.5	902.7
11	402.1	461.6	525.2	592.9	667.7	740.6	820.6	904.7	992.9
12	438.6	503.5	572.9	646.8	725.1	807.9	895.2	987.0	1083.2
13	475.2	545.5	620.7	700.7	785.5	875.2	969.8	1069.2	1173.5
14	511.8	587.5	668.2	754.6	846.6	942.6	1044.4	1151.5	1263.7
15	548.3	629.4	716.2	808.5	906.9	1009.9	1119.0	1233.7	1354.0
16	584.9	671.4	773.9	862.4	966.8	1077.2	1193.6	1315.9	1444.3
17	621.4	713.4	811.6	916.3	1027.2	1144.6	1268.2	1398.2	1534.5
18	658.0	755.3	859.4	970.2	1087.7	1211.9	1342.8	1480.4	1624.8
19	694.5	797.3	907.1	1024.1	1148.1	1279.2	1417.4	1562.7	1715.1
20	731.1	839.3	954.9	1078.0	1208.5	1346.5	1492.0	1644.9	1805.3

Diameter in feet.

Depth in feet.	23	24	25	26	27	28	29	30
5	493.3	537.1	582.8	630.4	679.8	731.1	784.2	839.3
6	592.0	644.5	699.4	756.5	815.8	877.2	941.1	1007.1
7	690.6	752.0	815.9	882.5	951.7	1023.5	1097.9	1175.0
8	789.3	859.4	932.5	1008.6	1087.7	1169.7	1254.8	1342.8
9	887.9	966.8	1049.1	1134.7	1223.6	1316.0	1411.6	1510.7
10	986.6	1074.2	1165.6	1260.8	1359.6	1462.2	1568.2	1678.5
11	1085.2	1181.7	1282.2	1386.8	1495.6	1608.7	1723.0	1846.4
12	1183.9	1289.1	1398.7	1512.9	1631.5	1754.6	1882.2	2014.2
13	1282.6	1396.5	1515.3	1639.0	1767.5	1900.8	2039.0	2182.0
14	1381.2	1503.9	1631.9	1765.1	1903.4	2047.1	2195.9	2343.9
15	1479.9	1611.4	1748.4	1891.1	2039.4	2193.3	2352.7	2517.8
16	1578.5	1718.8	1865.0	2017.2	2175.4	2339.5	2509.6	2685.6
17	1677.2	1826.2	1981.6	2143.3	2311.3	2485.7	2666.4	2853.5
18	1775.9	1933.6	2098.1	2269.4	2447.3	2631.9	2823.3	3021.3
19	1874.5	2041.1	2214.7	2395.4	2583.2	2778.1	2980.1	3189.2
20	1973.2	2148.5	2321.2	2521.5	2719.2	2924.4	3137.0	3357.0

For tanks that are tapering the diameter may be measured four-tenths from large end.

TABLE SHOWING THE PRESSURE OF WATER PER SQUARE INCH, DUE TO DIFFERENT HEADS, FROM 1 TO 250 FEET.

Head.	Pressure in lbs.	Head.	Pressure in lbs.	Head.	Pressure in lbs.
1	.4335	19	8.237	37	16.04
2	.8670	20	8.670	38	16.47
3	1.300	21	9.104	39	16.91
4	1.734	22	9.537	40	17.34
5	2.167	23	9.971	50	21.67
6	2.601	24	10.40	100	43.35
7	3.035	25	10.84	110	47.68
8	3.468	26	11.27	120	52.02
9	3.902	27	11.70	130	56.36
10	4.335	28	12.14	140	60.69
11	4.768	29	12.57	150	65.03
12	5.202	30	13.00	160	69.36
13	5.636	31	13.44	170	73.70
14	6.069	32	13.87	180	78.03
15	6.503	33	14.31	190	82.36
16	6.936	34	14.74	200	86.70
17	7.370	35	15.17	225	97.41
18	7.803	36	15.60	250	108.37

MEASURES OF CAPACITY AND WEIGHT.

MEASURES OF WEIGHT.—A VOIR DU POIS.—16 drams equal 1 ounce; 16 ounces 1 pound; 112 pounds 1 hundredweight; 20 hundredweights 1 ton. TROY.—24 grains 1 pennyweight; 20 pennyweights 1 ounce; 12 ounces 1 pound. APOTHECARIES'.—20 grains equal 1 scruple; 3 scruples 1 dram; 8 drams 1 ounce; 12 ounces 1 pound.

MEASURES OF CAPACITY (DRY).—2150.42 cubic inches equal 1 United States (or Winchester) bushel; the dimensions of which are $18\frac{1}{2}$ inches diameter inside, $19\frac{1}{2}$ inches outside and 8 inches deep; 2747.70 cubic inches equal 1 heaped bushel, the cone of which must not be less than 6 inches high.

MEASURES OF CAPACITY (LIQUIDS).—231 cubic inches equal 1 United States standard gallon; 277.274 cubic inches equal 1 Imperial (British) gallon; $31\frac{1}{2}$ United States gallons equal 1 barrel; 42 gallons equal 1 tierce; 63 gallons equal 1 hogshead; 84 gallons equal 1 puncheon; 126 gallons equal 1 pipe; 252 gallons equal 1 tun.

FRENCH MEASURES OF FREQUENT REFERENCE, COMPARED WITH U. S. MEASURES.—Meter, 3.28 feet; Decimeter (1-10 meter), 3.94 inches; Centimeter, .4 inch; Millimeter, .04 inch; Hectoliter, 26.42 gallons; Liter, 2.11 pints; Kilogram, 2.2 pounds.

WEIGHTS OF VARIOUS SUBSTANCES.—POUNDS AVOIRDUPOIS.—1 cubic foot of bricks weighs 124 pounds; 1 do. of sand or loose earth, 95; 1 do. of cork, 15; 1 do. of granite, 170; 1 do. of cast iron, 450; 1 do. of wrought iron, 485; 1 do. of steel, 490; 1 do. of copper, 555; 1 do. lead, 709; 1 do. brass, 520; 1 do. tin, 459; 1 do. white pine, 30; 1 do. oak, 48; 1 do. sea water, 64.08; 1 do. fresh, 62.35; 1 do. air, 0765.

CAPACITY OF CYLINDERS IN IMPERIAL GALLONS

This table gives the number of Imperial gallons (277.274 inches) in cylindrical vessels from 1 to 72 inches in depth and from 4 to 72 inches in diameter.

Diameter in Inches.

Depth.	4	5	6	7	8	9	10
1 in.	.0453	.0708	.102	.1388	.1814	.2295	.2833
2	.0906	.1416	.204	.2776	.3628	.4590	.5666
3	.1359	.2124	.306	.4164	.5442	.6885	.8499
4	.1812	.2832	.408	.5552	.7256	.9180	1.1332
5	.2265	.3540	.510	.6940	.9070	1.1475	1.4165
6	.2718	.4248	.612	.8328	1.0884	1.3770	1.6998
7	.3171	.4956	.714	.9716	1.1698	1.6065	1.9831
8	.3624	.5664	.816	1.1104	1.4512	1.8360	2.2664
9	.4077	.6372	.918	1.2492	1.6326	2.0655	2.5497
10	.4530	.7080	1.020	1.3880	1.8140	2.2950	2.8330
11	.4983	.7788	1.122	1.5268	1.9954	2.5245	3.1163
12	.5436	.8496	1.224	1.6656	2.1768	2.7540	3.3996
13	.5889	.9204	1.326	1.8044	2.3582	2.9835	3.6829
14	.6342	.9912	1.428	1.9432	2.3396	3.2130	3.9662
15	.6795	1.0620	1.530	2.0820	2.7210	3.4425	4.2495
16	.7248	1.1328	1.632	2.2208	2.9024	3.6720	4.5328
17	.7701	1.2036	1.734	2.3596	3.0838	3.9015	4.8161
18	.8154	1.2744	1.836	2.4984	3.2652	4.1310	5.0994
19	.8607	1.3452	1.938	2.6372	3.4466	4.3605	5.3827
20	.9060	1.4160	2.040	2.7760	3.6280	4.5900	5.6660
21	.9513	1.4868	2.142	2.9148	3.5094	4.8195	5.9493
22	.9966	1.5576	2.244	3.0536	3.9908	5.0490	6.2326
23	1.0419	1.6284	2.346	3.1924	4.1722	5.2785	6.5159
24	1.0872	1.6992	2.448	3.3312	4.3536	5.5080	6.7992
25	1.1325	1.7700	2.550	3.4700	4.5350	5.7375	7.0825
26	1.1778	1.8408	2.652	3.6088	4.7164	5.9670	7.3658
27	1.2231	1.9116	2.754	3.7476	4.8978	6.1965	7.6491
28	1.2684	1.9824	2.856	3.8864	4.6792	6.4260	7.9324
29	1.3137	2.0532	2.958	4.0252	5.2606	6.6555	8.3057
30	1.3590	2.1240	3.060	4.1640	5.4420	6.8850	8.4990
31	1.4043	2.1948	3.162	4.3028	5.6234	7.1145	8.7823
32	1.4496	2.2656	3.264	4.4416	5.8048	7.3440	9.0656
33	1.4949	2.3364	3.366	4.5804	5.9862	7.5735	9.3489
34	1.5402	2.4072	3.468	4.7192	6.1676	7.8030	9.6322
35	1.5855	2.4780	3.570	4.8580	6.3490	8.0325	9.9155
36	1.6308	2.5488	3.672	4.9968	6.5304	8.2620	10.1988
40	1.8120	2.8320	4.080	5.5520	7.2560	9.1800	11.3320
44	1.9932	3.1152	4.489	6.1072	7.9816	10.0980	12.4652
48	2.1744	3.3984	4.896	6.6624	8.7072	11.0160	13.5984
54	2.4462	3.8232	5.508	7.4952	9.7956	12.3930	15.2982
60	2.7180	4.2480	6.120	8.3280	10.8840	13.7700	16.9980
72	3.2616	5.0976	7.344	9.9936	13.0608	16.5240	20.3976

CAPACITY OF CYLINDERS IN IMPERIAL GALLONS—*Continued*

Diameter in Inches.

Depth.	11	12	13	14	15	16
1 in.	.3428	.4080	.4788	.5553	.6375	.7253
2	.6856	.8160	.9576	1.1106	1.2750	1.4506
3	1.0284	1.2240	1.4364	1.6659	2.0125	2.1759
4	1.3712	1.6320	1.9152	2.2212	2.5500	2.9012
5	1.7140	2.0400	2.3940	2.7765	3.1875	3.6265
6	2.0568	2.4480	2.8728	3.3318	3.8250	4.3518
7	2.3996	2.8560	3.3516	3.8871	4.3625	5.0771
8	2.7424	3.2640	3.8304	4.4424	5.1000	5.8024
9	3.0852	3.6720	4.3092	4.9977	5.7375	6.5277
10	3.4280	4.0800	4.7880	5.5530	6.3750	7.2530
11	3.7708	4.4880	5.2668	6.1083	7.0125	7.9783
12	4.1136	4.8960	5.7456	6.6636	7.6500	8.7036
13	4.4564	5.3040	6.2244	7.2189	8.2875	9.4289
14	4.7992	5.7120	6.7032	7.7742	8.7250	10.1542
15	5.1420	6.1200	7.1820	8.3295	9.5625	10.8795
16	5.4848	6.5280	7.6608	8.8848	10.2000	11.6048
17	5.8276	6.9360	8.1396	9.4401	10.8375	12.3301
18	6.1704	7.3440	8.6184	9.9954	11.4750	13.0554
19	6.5132	7.7520	9.0972	10.5507	12.1125	13.7807
20	6.8560	8.1600	9.5760	11.1060	12.7500	14.5060
21	7.1988	8.5680	10.0548	11.6613	13.0875	15.2313
22	7.5416	8.9760	10.5336	12.2166	14.0250	15.9566
23	7.8844	9.3840	11.0124	12.7719	14.6625	16.6819
24	8.2272	9.7920	11.4912	13.3272	15.3000	17.4072
25	8.5700	10.2000	11.9700	13.8825	15.9375	18.1325
26	8.9128	10.6080	12.4488	14.4378	16.5750	18.8578
27	9.2556	11.0160	12.9276	14.9931	17.2125	19.5831
28	9.5984	11.4240	13.4064	15.5484	17.4500	20.3084
29	9.9412	11.8320	13.8852	16.1037	18.4875	21.0337
30	10.2840	12.2400	14.3640	16.6590	20.1250	21.7590
31	10.6268	12.6480	14.8428	17.2143	19.7625	22.4843
32	10.9696	13.0560	15.3216	17.7696	20.4000	23.2096
33	11.3124	13.4640	15.8004	18.3249	21.0375	23.9349
34	11.6552	13.8720	16.2792	18.8802	21.6750	24.6602
35	11.9980	14.2800	16.7580	19.4355	21.8125	25.3855
36	12.3408	14.6880	17.2368	19.9908	22.9500	26.1108
40	13.7120	16.3200	19.1520	22.2120	25.5000	29.0120
44	15.0832	17.9520	21.0672	24.4332	28.0500	31.9132
48	16.4544	19.5840	22.9824	26.6544	30.6000	34.8144
54	18.5112	22.0320	25.8552	29.9862	34.4250	39.1702
60	20.5680	24.4800	28.7280	33.3180	38.2500	43.5180
72	24.6816	29.3760	34.4736	39.9816	45.9000	52.2216

CAPACITY OF CYLINDERS IN IMPERIAL GALLONS—*Continued*

Depth.	Diameter in Inches.					
	17	18	19	20	21	24
1 in.	.8188	.9180	1.0228	1.1333	1.2495	1.632
2	1.6376	1.8360	2.0456	2.2666	2.4990	3.264
3	2.4564	2.7540	3.0684	3.3999	3.7485	4.986
4	3.2752	3.6720	4.0912	4.5332	4.9980	6.528
5	4.0940	4.5900	5.1140	5.6665	6.2475	8.160
6	4.9128	5.5080	6.1368	6.7998	7.4970	9.792
7	5.7316	6.4260	7.1596	7.9331	8.7465	11.424
8	6.5504	7.3440	8.1824	9.0664	9.9960	13.056
9	7.3692	8.2620	9.2052	10.1997	11.2455	14.688
10	8.1880	9.1800	10.2280	11.3330	12.4950	16.320
11	9.0068	10.0980	11.2518	12.4663	13.7445	17.952
12	9.8256	11.0160	12.2736	13.5996	14.9940	19.584
13	10.6444	11.9340	13.2964	14.7329	16.2435	21.216
14	11.4632	12.8520	14.3192	15.8662	17.4930	22.848
15	12.2820	13.7700	15.3420	16.9995	18.7425	24.480
16	13.1008	14.6880	16.3648	18.1328	19.9920	26.112
17	13.9196	15.6060	17.3876	19.2661	21.2415	27.744
18	14.7384	16.5240	18.4104	20.3994	22.4910	29.376
19	15.5572	17.4420	19.4332	21.5327	23.7405	31.008
20	16.3760	18.3600	20.4560	22.6660	24.9900	32.640
21	17.1948	19.2780	21.4788	23.7993	26.2395	34.272
22	18.0136	20.1960	22.5036	24.9326	27.4890	35.904
23	18.8324	21.1140	23.5244	26.0659	28.7385	37.536
24	19.6512	22.0320	24.5472	27.1992	29.9880	39.168
25	20.4700	22.9500	25.5700	28.3325	31.2375	40.800
26	21.2888	23.8680	26.5928	29.4658	32.4870	42.432
27	22.1076	24.7860	27.6156	30.5991	33.7365	44.064
28	22.9264	25.7040	28.6384	31.7324	34.9860	45.696
29	23.7452	26.6220	29.6612	32.8657	36.2355	47.328
30	24.5640	27.5400	30.6840	33.9990	37.4850	48.960
31	25.3828	28.4580	31.7068	35.1323	38.7345	50.592
32	26.2016	29.3760	32.7296	36.2656	39.9840	52.224
33	27.0204	30.2940	33.7554	37.3989	41.2335	53.856
34	27.8392	31.2120	34.7752	38.5322	42.4830	55.488
35	28.6580	32.1300	35.7980	39.6655	43.7325	57.120
36	29.4768	33.0480	36.8208	40.7988	44.9820	58.752
40	32.7520	36.7200	40.9120	45.3320	49.9800	65.280
44	36.0272	40.3920	45.0072	49.8652	54.9780	71.808
48	39.3024	44.0640	45.0944	54.6384	59.9760	78.336
54	44.2152	49.5720	55.2312	61.1982	67.4730	88.128
60	49.1280	55.0800	61.3680	67.9980	74.9700	97.920
72	58.9536	66.0960	73.6416	81.5976	89.9640	117.504

CAPACITY OF CYLINDERS IN IMPERIAL GALLONS—*Continued*

Depth.	Diameter in Inches.					
	30	36	40	48	60	72
1 in.	2.55	3.672	4.5333	6.528	10.2	14.688
2	5.10	7.344	9.0666	13.056	20.4	29.376
3	7.65	11.016	13.5999	19.584	30.6	44.064
4	10.20	14.688	18.1332	26.112	40.8	58.752
5	12.75	18.360	22.6665	32.640	51.0	73.440
6	15.30	22.032	27.1998	39.168	61.2	88.128
7	17.85	25.704	31.7331	45.696	71.4	102.816
8	20.40	29.376	36.2664	52.224	81.6	117.504
9	22.95	33.048	40.7997	58.752	91.8	132.192
10	25.50	36.720	45.3330	65.280	102.0	146.880
11	28.05	40.392	49.8663	71.808	112.2	161.568
12	30.60	44.064	54.3996	78.336	122.4	176.256
13	33.15	47.736	58.9329	84.864	132.6	190.944
14	35.70	51.408	63.4662	91.382	142.8	205.632
15	38.25	55.080	67.9995	97.920	153.0	220.320
16	40.80	58.752	72.5328	104.448	163.2	235.008
17	43.35	62.424	77.0661	110.976	173.4	249.696
18	45.90	66.096	81.5994	117.504	183.6	264.384
19	48.45	69.768	86.1327	124.032	193.8	279.072
20	51.00	73.440	90.6660	130.560	204.0	293.760
21	53.55	77.112	95.1999	137.088	214.2	308.448
22	56.10	80.784	99.7326	143.616	224.4	323.136
23	58.65	84.456	104.2659	150.144	234.6	337.824
24	61.20	88.128	108.7992	156.672	244.8	352.512
25	63.75	91.800	113.3325	163.200	255.0	367.200
26	66.30	95.472	117.8658	169.728	265.2	381.888
27	68.85	99.144	122.3991	176.256	275.4	396.576
28	71.40	102.816	126.9324	182.784	285.6	411.264
29	73.95	106.488	131.4657	189.312	295.8	425.952
30	76.50	110.160	135.9990	195.840	306.0	440.640
31	79.05	113.832	140.5326	202.368	316.2	455.328
32	81.60	117.504	145.0656	208.896	326.4	470.016
33	84.15	121.176	149.5989	215.424	336.6	484.704
34	86.70	124.848	154.1322	221.952	346.8	499.392
35	89.25	128.520	158.6655	228.480	357.0	514.080
36	91.80	132.192	163.1988	235.008	367.2	528.768
40	102.00	146.880	181.3320	261.120	408.0	587.520
44	112.20	161.568	199.4652	287.232	448.8	646.272
48	122.40	176.256	217.5984	313.344	489.6	705.024
54	137.70	198.288	244.2982	352.512	550.0	793.152
60	153.00	220.320	271.9980	391.680	612.0	881.280
72	183.60	264.384	326.3976	470.016	734.4	1057.536

TABLE OF EFFECTS UPON BODIES BY HEAT.

	Degrees F.
Cast iron thoroughly melts at.....	2,228
Gold melts at.....	1,913
Silver melts at.....	1,733
Copper melts at.....	1,929
Brass melts at.....	1,873
Zinc melts at.....	779
Lead melts at.....	618
Bismuth melts at.....	506
Tin melts at.....	444
Tin and lead, equal parts, melt at.....	418
Tin 2 parts, bismuth 5 and lead 3, melt at.....	199

PRACTICAL RECEIPTS.
SOLDERS.**SOLDER FOR GOLD.**

Gold, 6 pennyweights ; silver, 1 pennyweight ; copper, 2 pennyweights.

SOLDER FOR SILVER, FOR THE USE OF JEWELERS.

Fine silver, 19 pennyweights ; copper, 1 pennyweight ; sheet brass, 10 pennyweights.

WHITE SOLDER FOR SILVER.

Silver, 1 ounce ; tin, 1 ounce.

WHITE SOLDER FOR RAISED BRITANNIA WARE.

Tin, 100 pounds ; copper, 3 ounces ; to make it free, add lead, 3 ounces.

BEST SOFT SOLDER FOR CAST BRITANNIA WARE.

Tin, 8 pounds ; lead, 5 pounds.

YELLOW SOLDER FOR BRASS OR COPPER.

Copper, 1 pound ; zinc, 1 pound.

YELLOW SOLDER FOR BRASS OR COPPER.

(Stronger than the last.) Copper, 32 pounds; zinc, 29 pounds; tin, 1 pound.

SOLDER FOR COPPER.

Copper, 10 pounds; zinc, 9 pounds.

BLACK SOLDER.

Copper, 2 pounds; zinc, 3 pounds; tin, 2 ounces.

BLACK SOLDER.

Sheet brass, 20 pounds; tin, 6 pounds; zinc, 1 pound.

SILVER SOLDER FOR PLATED METAL.

Fine silver, 1 ounce; brass, 10 pennyweights.

PLUMBERS' SOLDER.

Lead, 2; tin, 1 part.

TINMEN'S SOLDER.

Lead, 1; tin, 1 part.

PEWTERERS' SOLDER.

Tin, 2; lead, 1 part.

HARD SOLDER.

Copper, 2; zinc, 1 part.

SOLDER FOR STEEL JOINTS.

Silver, 19 pennyweights; copper, 1 pennyweight; brass, 2 pennyweights. Melt under a coat of charcoal dust.

SOFT GOLD SOLDER

Is composed of 4 parts gold, 1 of silver and 1 of copper. It can be made softer by adding brass, but the solder becomes more liable to oxidize.

CEMENT FOR MENDING EARTHEN AND GLASS WARE.

1. Heat the article to be mended a little above boiling water heat, then apply a thin coating of gum shellac on both surfaces of the broken vessel, and when cold it will be as strong as it was originally. 2. Dissolve gum shellac in alcohol, apply the solution and bind the parts firmly together until the cement is perfectly dry.

CEMENT FOR STONE WARE.

Another cement in which an analogous substance, the curd of milk, is employed, is made by boiling slices of skim milk cheese into a gluey consistence in a great quantity of water, and then incorporating it with quicklime on a slab with a muller, or in a marble mortar. When this compound is applied warm to broken edges of stone ware, it unites them very firmly after it is cold.

IRON RUST CEMENT

Is made from 50 to 100 parts of iron borings, pounded and sifted, mixed with 1 part of sal ammoniac, and when it is to be applied, moistened with as much water as will give it a pasty consistency. Another composition of the same kind is made by mixing 4 parts of fine borings or filings of iron, 2 parts of potters' clay and 1 part of pounded potsherds, and making them into a paste with salt and water.

CEMENT FOR IRON TUBES, BOILERS, ETC.

Finely powdered iron, 66 parts; sal ammoniac, 1 part; water, a sufficient quantity to form a paste.

CEMENT FOR IVORY, MOTHER OF PEARL, ETC.

Dissolve 1 part of isinglass and 2 of white glue in 30 of water, strain and evaporate to 6 parts. Add 1-30 part

of gum mastic, dissolve in $\frac{1}{2}$ part of alcohol and 1 part of white zinc. When required for use warm and shake up.

CEMENT FOR HOLES IN CASTINGS.

The best cement for this purpose is made by mixing 1 part of sulphur in powder, 2 parts of sal ammoniac and 80 parts of clean powdered iron turnings. Sufficient water must be added to make it into a thick paste, which should be pressed into the holes or seams which are to be filled up. The ingredients composing this cement should be kept separate and not mixed until required for use. It is to be applied cold, and the casting should not be used for two or three days afterward.

CEMENT FOR COPPERSMITHS AND ENGINEERS.

Boiled linseed oil and red lead mixed together into a putty is often used by coppersmiths and engineers to secure joints. The washers of leather or cloth are smeared with this mixture in a pasty state.

A CHEAP CEMENT.

Melted brimstone, either alone or mixed with rosin and brick dust, forms a tolerably good and very cheap cement.

PLUMBERS' CEMENT

Consists of black rosin, 1 part; brick dust, 2 parts; well incorporated by a melting heat.

CEMENT FOR BOTTLE CORKS.

The bituminous or black cement for bottle corks consists of pitch hardened by the addition of rosin and brick dust.

CHINA CEMENT.

Take the curd of milk, dried and powdered, 10 ounces; quicklime, 1 ounce; camphor, 2 drams. Mix and keep in closely stopped bottles. When used, a portion is to be mixed with a little water into a paste, to be applied quickly

CEMENT FOR LEATHER.

A mixture of India rubber and shellac varnish makes a very adhesive leather cement. A strong solution of common isinglass, with a little diluted alcohol added to it, makes an excellent cement for leather.

MARBLE CEMENT.

Take plaster of paris and soak it in a saturated solution of alum, then bake the two in an oven, the same as gypsum is baked to make it plaster of paris; after which they are ground to powder. It is then used as wanted, being mixed up with water like plaster and applied. It sets into a very hard composition capable of taking a very high polish. It may be mixed with various coloring minerals to produce a cement of any color capable of imitating marble:

CEMENT FOR MARBLE WORKERS AND COPPERSMITHS.

White of an egg alone, or mixed with finely sifted quicklime, will answer for uniting objects which are not exposed to moisture. The latter combination is very strong and is much employed for joining pieces of spar and marble ornaments. A similar composition is used by coppersmiths to secure the edges and rivets of boilers, only bullock's blood is the albuminous matter used instead of white of egg.

TRANSPARENT CEMENT FOR GLASS.

Dissolve 1 part of india rubber in 64 of chloroform, then add gum mastic in powder 14 to 24 parts, and digest for two days with frequent shaking. Apply with camel's hair brush.

CEMENT TO MEND IRON POTS AND PANS.

Take 2 parts of sulphur, and 1 part, by weight, of fine black lead; put the sulphur in an old iron pan, holding it over the fire until it begins to melt, then add the lead, stir well until all is mixed and melted, then pour out on an iron plate or smooth stone. When cool, break into small pieces. A sufficient quantity of this compound being placed upon the crack of the iron pot to be mended, can be soldered by a hot iron in the same way a tinsmith solders his sheets. If there is a small hole in the pot, drive a copper rivet in it and then solder over it with this cement.

CEMENT TO RENDER CISTERNS AND CASKS WATER TIGHT.

An excellent cement for resisting moisture is made by incorporating thoroughly 8 parts of melted glue, of the consistence used by carpenters, with 4 parts of linseed oil, boiled into varnish with litharge. This cement hardens in about 48 hours and renders the joints of wooden cisterns and casks air and water tight. A compound of glue with one-quarter its weight of Venice turpentine, made as above, serves to cement glass, metal and wood to one another. Fresh made cheese curd and old skim milk cheese, boiled in water to a slimy consistency, dissolved in a solution of bicarbonate of potash are said to form a good cement for glass and porcelain. The gluten of

wheat, well prepared, is also a good cement. White of eggs with flour and water, well mixed, and smeared over linen cloth, forms a ready lute for steam joints in small apparatus.

A GOOD CEMENT.

Shellac, dissolved in alcohol or in a solution of borax, forms a pretty good cement.

CEMENT FOR REPAIRING FRACTURED BODIES OF ALL KINDS.

White lead ground upon a slab with linseed oil varnish and kept out of contact of air affords a cement capable of repairing fractured bodies of all kinds. It requires a few weeks to harden. When stone and iron are to be cemented together, a compound of equal parts of sulphur with pitch answers very well.

CEMENT FOR CRACKS IN WOOD.

Make a paste of slaked lime 1 part, rye meal 2 parts, with a sufficient quantity of linseed oil. Or dissolve 1 part of glue in 16 parts of water, when almost cool stir in sawdust and prepared chalk a sufficient quantity. Or oil varnish thickened with a mixture of equal parts of white lead, red lead, litharge and chalk.

CEMENT FOR JOINING METALS AND WOOD.

Melt rosin and stir in calcined plaster until reduced to a paste, to which add boiled oil a sufficient quantity to bring it to the consistence of honey; apply warm. Or, melt rosin 180 parts and stir in burnt umber 30, calcined plaster 15 and boiled oil 8 parts.

GAS FITTERS' CEMENT.

Mix together resin $4\frac{1}{2}$ parts, wax 1 part, and Venetian red 3 parts.

IMPERVIOUS CEMENT FOR APPARATUS, CORKS, ETC.

Zinc white rubbed up with copal varnish to fill up the indentures: when dry, to be covered with the same mass somewhat thinner, and lastly with copal varnish alone.

CEMENT FOR FASTENING BRASS TO GLASS VESSELS.

Melt rosin 150 parts, wax 30, and add burnt ocher 30 and calcined plaster 2 parts. Apply warm.

CEMENT FOR FASTENING BLADES, FILES, ETC.

Shellac 2 parts, prepared chalk 1, powdered and mixed. The opening for the blade is filled with this powder, the lower end of the iron heated and pressed in.

HYDRAULIC CEMENT PAINT.

If hydraulic cement be mixed with oil, it forms a first rate anti-combustible and excellent water proof paint for roofs of buildings, outhouses, walls, &c.

TO STOP A LEAKY ROOF.

Twenty-five pounds yellow ocher, 1 pound litharge, 6 pounds black lead, 1 pound fine salt; boil well in oil. Soak strips of cloth in the above and paste over the seams. Good where solder is not practicable.

FLUX FOR SOLDERING TIN ROOF.

One part rosin and 2 parts binnacle oil mixed hot and used the same as rosin alone; or, cut with alcohol 1 pint as much rosin as possible and put on with a swab. Either good when the wind blows. Or saponified or red oil used with a swab along the seams. Solder flows more freely than with rosin alone.

SOLDERING FLUID OR FLUX.

Prussiate of potash, borax and copperas, each 1 dram; sal ammoniac $\frac{1}{2}$ ounce, muriatic acid $3\frac{1}{2}$ ounces, well mixed, then add as much zinc as it will dissolve. Add 1 pint or more water according to strength required.

ANOTHER.

Sal ammoniac and borax, each 1 dram; chloride of zinc 1 ounce, water 1 pint. It will not eat copper or tarnish tin. Use less water and it will be stronger.

PREPARATION AND APPLICATION OF ALUMINUM SOLDERS.

Tin, 95 to 99: Bismuth, 5 to 8.

This composition, which is an ordinary soft solder, is adapted for soldering aluminum by means of the common soldering iron.

Zinc, 80	Copper, 8	Aluminum, 12
Zinc, 85	Copper, 6	Aluminum, 5
Zinc, 90	Copper, 4	Aluminum, 6

In preparing aluminum solders the alloy of copper and aluminum is always made first and the zinc added. The zinc used should contain no iron as it will affect the fusibility and durability of the solder. In preparing the solder, first melt all the copper, then add the aluminum gradually. The two metals are of a very different density and the mixture should be stirred with an iron rod to unite them as far as possible. There is no solder which operates with aluminum in the same way as ordinary solder works with copper, tin, etc. This is due to the fact that aluminum will not alloy readily with solders with temperatures so low as the other metals require.

Then, it is also covered with a thin coating of aluminum oxide, which is very refractory. All the surface to which it is intended that the solder shall adhere must first be tinned. This is accomplished by heating the metal to a temperature above the fusion point of the solder used and then rubbing the surface with a stick of the solder; thus rubbing the oxide off the surface with the solder itself and covering the exposed points with melted solder all in the same motion. After the edges to be united are thus tinned they may be sweated together with pure block tin with the aid either of a soldering iron or blast lamp. It is well to bear in mind that solder will not flow into an aluminum joint even when tinned, by capillary action, as it does into copper or tin joints, and it is therefore necessary to place on the surface of the metal all of the material necessary to sweat them together before the edges are brought into contact.

Practical Sheet Metal Work

AND DEMONSTRATED PATTERNS

A carefully selected series of articles on shop and outside practice from the Metal Worker with additional new matter to make each volume cover its field completely.

This set of books has been published to meet the demand for the articles on pattern drafting and cutting as well as the many excellent methods for forming up and handling material which have been printed in the Metal Worker. All of this material was arranged according to the phase of metal work to which it related and it was then carefully edited by Mr. J. Henry Teschmacher, an expert, and only the best methods were retained. Much new material was added by the editor to make each separate volume complete, and we feel that the work forms a veritable encyclopedia on all phases of sheet metal work.

- | | |
|---|---|
| I. Leaders & Leader Heads, 113 pages, 150 figures. | VII. Practical Cornice Work, 139 pages, 237 figures. |
| II. Gutters & Roof Outlets, 116 pages, 194 figures. | VIII. Skylights, 122 pages, 260 figures. |
| III. Roofing, 138 pages, 207 figures. | IX. Furnace & Tin Shop Work, 145 pages, 239 figures. |
| IV. Ridging & Corrugated Iron Work, 132 pages, 239 figures. | X. Piping & Heavy Metal Work, 144 pages, 259 figures. |
| V. Cornice Patterns, 119 pages, 195 figures. | XI. Automobile & Sheet Metal Boats, 137 pages, 193 figures. |
| VI. Circular Cornice Work, 126 pages, 194 figures. | XII. Special Problems, 154 pages, 150 figures. |

1575 pages. $8\frac{1}{2} \times 11$ inches. 2517 Illustrations. Cloth.
Single Volumes, \$1.50. The Set, \$15.00.

SENT PREPAID BY

DAVID WILLIAMS COMPANY

239 West 39th Street, New York

THE EVERREADY PIPE AND ELBOW CHART

(Designed by M. W. Pehl)

A New Short Cut Method of Laying Out Elbows

Made of celluloid with one large central and two smaller (rotating) discs

A KEY TO RAPID AND ACCURATE WORKMANSHIP

With this little chart you can save half the time usually required to lay out elbow or pipe work. One side of the chart gives the length of throat for any size pipe from 3 to 62 inches and for any number of pieces with laps allowed and a table to calculate for all gauges of metal. The other shows the circumference and area of all sizes of pipe, from 3 to 62 inches inclusive.

Full instructions regarding the use of the Chart are given in a 40-page booklet which is supplied with it. The use of numerous diagrams makes this explanation simple and practical. Many valuable tables giving the weights of various materials are also included, together with much practical data on heating and ventilating work.

A few of the principal articles are:

Circumference including laps for all sizes of pipes from 3" to 62".

Areas of all sizes of pipes from 3" to 62".

Length of throat of 4, 5, 6 piece elbows all radius from 3" to 62".

Deductions from small ends from No. 26 to gauge steel.

Tapering joints of all sizes.

Length of throat for 8, 10, 12, 15, 16, 18, 20, 24 piece elbow.

Elbows of less than 90 degrees.

Mitre lines for 4, 5, 6, 8, 10, 12, 15, 16, 18, 20, 24, piece elbows.

Laying out elbows.

Weight of galvanized pipe per lineal foot No. 26, 24, 22, 20 gauge.

Weight of galvanized elbows of any radius.

Weight of galvanized ducts from $1\frac{1}{2}'' \times 1\frac{1}{2}''$ to $11' 5'' \times 11' 5''$ in three gauges.

Weight of black and galvanized steel per square foot.

The Booklet is bound in durable linen with a pocket in the inside front cover for the Chart. It is small enough to go in the hip-pocket. It was made for you—send for it and profit.

Price Complete, 75 cents Postpaid.

DAVID WILLIAMS COMPANY

239 West 39th Street, - - - - - New York

THE NEW Metal Worker Pattern Book

A TREATISE ON PATTERN CUTTING
AS APPLIED TO ALL BRANCHES
OF SHEET METAL WORK

By GEO. W. KITTREDGE

It covers the subject so thoroughly and accurately that it is called "The Bible of the Sheet Metal Worker." Every detail of the work is taken up systematically from the selection of the instruments, through linear drawing, geometrical drawing and the principles of pattern cutting to the problems in laying out which range from the simple elbow work to the very difficult problems where triangulation is thoroughly explained.

Features which make the work exceptionally popular are the chapters on drawing and geometrical problems, which explain these usually difficult and discouraging subjects so clearly that no one can fail to understand them. . . . As a book for home study it has no equal.

THE PRINCIPAL CONTENTS

Terms and Definitions—15 Pages—Explaining the various terms employed by Draftsmen, Architects and Mechanics. Drawing Instruments and Materials—13 Pages—Describing the tools and materials used by Draftsmen. Linear Drawing—6 Pages—Explaining the principles of geometrical drawings as applied to the wants of the pattern cutter. Geometrical Problems—35 Pages—Containing 85 problems of most frequent occurrence and supplementing the previous chapter. Principles of Pattern Cutting—25 Pages—Explaining the theory of pattern cutting as applied to all classes of work. Pattern Problems (3 Sections)—325 Pages—1. Miter Cutting. 2. Flaring Work. 3. Triangulation. A collection of practical examples of work daily encountered by Cornice Workers and Tinner's and of frequent occurrence with Builders.

438 Pages. 10×13 inches. 744 Illustrations. Cloth.
Price \$5.00 Delivered.

DAVID WILLIAMS COMPANY

239 West 39th Street, - - - - New York

TO HANG UP IN THE SHOP

THE METAL WORKER SHOP CARDS

Presenting a Series of Useful Tables Convenient for Reference

Every shop needs a set of these cards for they give the information you want the minute it is needed. They are printed on heavy manila stock of best quality 10½×14 inches in size and are eyeletted for hanging right handy to the work.

If you have ever figured the time lost in looking up the size sheet required for a tank or cylinder of given capacity, or in getting the area of a circle, nothing more need be said in favor of the cards.

- No. 1—**The Quantity of Tin Required for Roofs** (Flat and Standing Seam) With Rules for Calculating Roof Area.
- No. 3—**The Diameters, Areas and Circumferences of Circles.** Advancing by eighths, from 1 inch to 54½ inches. With full Directions for Use; also Tables of Conversion of Inches and Eighths into Decimals of a Foot, and Conversion of Vulgar Fractions into Decimals; also Rules relating to the Circle.
- No. 5—**Capacity of Cylinders in United States Gallons;** with Directions for Use and a schedule of Decimal Equivalents of the Fractional Parts of a Gallon.

PRICE 25 CENTS EACH. PER SET, 60 CENTS

MENSURATION FOR SHEET METAL WORKERS

AS APPLIED IN WORKING ORDINARY PROBLEMS IN SHOP PRACTICE

With 71 Figures

By WILLIAM NEUBECKER

This new book contains an easily applied explanation of the principles of mensuration (the art of measurements), showing its practical application in solving the great number of problems that arise in finding the areas, dimensions, or capacities of the different sizes and shapes of sheet metal products turned out from the shop.

A very handy aid in computing the measurements of material by correct methods, and invaluable to the mechanic, shop foreman, and apprentice.

51 Pages. Cloth Covers. 50 Cents, Postpaid

DAVID WILLIAMS COMPANY

239 West 39th Street, - - - - New York

METAL WORKER

You want the news of your trade in a clear and interesting form with a lot of particulars about new tools, machinery and apparatus, so written that you would rather read it than your daily paper.

You desire to be posted regarding the latest ideas on the design and installation of heating and plumbing systems, to know about the best ideas in pattern cutting and you desire to know the solution of the problems of the cornice maker, the plumber and the stove-man.

A knowledge of what the other man is doing is a mighty good business asset, and the advice of the best brains and talent of trained experts in your line is at your command.

For nearly forty years METAL WORKER has been the recognized authority and technical adviser of the sheet metal, plumbing and heating, steam-fitting, ventilating, tool and machinery trade.

METAL WORKER comes from the press every week at a cost to you of only \$2.00 a year.

Any issue you miss may contain just the particular article that will be of greatest value to your business.

METAL WORKER

239 WEST 39TH STREET, NEW YORK CITY

AR 2 1912

LIBRARY OF CONGRESS



0 008 857 219 1